



GU285 User Guide

LG ELECTRONICS INC.

GU285 User Guide

ENGLISH

हिन्दी



CE 0168

[www.lgmobile.com](http://www.lgmobile.com)

P/N : MMBB0353912 (1.0) G

Bluetooth QD ID B015843



Some of the contents in this manual may differ from your phone depending on the software of the phone or your service provider.

## GU285 User Guide | ENGLISH



Congratulations on your purchase of the advanced and compact GU285 phone by LG, designed to operate with the latest digital mobile communication technology.

# Contents

<b>GUIDELINES</b>	
Guidelines for safe and efficient use .....	8
<b>01 SET UP</b>	
Getting to know your phone .....	15
Open view .....	16
Installing the USIM and battery ....	17
<b>Memory card</b> .....	20
Installing a memory card .....	20
Removing a memory card .....	20
Formatting a memory card .....	20
<b>02 YOUR HOME SCREEN</b>	
Your Home screen.....	21
The status bar .....	21
<b>03 THE BASICS</b>	
<b>Calls</b> .....	22
Making a call.....	22
Making a call from your contacts.....	22
Answering and rejecting a call....	22
Speed dialling.....	22
Viewing your call logs .....	23
Using call divert.....	24
Using call barring.....	24
Changing the call settings .....	25
Common settings .....	25
<b>Contacts</b> .....	27
Searching for a contact.....	27
Adding a new contact .....	27
Adding a contact to a group .....	27
Adding a picture to a contact.....	28
Copying your contacts to your USIM / Handset .....	28
<b>Messaging</b> .....	29
Messaging .....	29
Sending a message .....	29
Entering text.....	30
Text input mode using the keypad.....	30
Setting up your email.....	30
Sending an email using your new account .....	30
Message folders .....	31
Managing your messages .....	31
Using templates.....	32
Changing your text message settings.....	33
Changing your multimedia message settings .....	33
Changing your email settings .....	34
Changing your other settings.....	35

<b>04 GET CREATIVE</b>	
<b>Camera</b> .....	<b>36</b>
Taking a quick photo.....	36
Before you take your photo.....	36
After you've taken your photo.....	37
Changing the image size.....	38
Viewing your saved photos.....	38
Setting a photo as Wallpaper.....	38
<b>Video camera</b> .....	<b>39</b>
Shooting a quick video.....	39
Before you take your video.....	39
After you've shot your video.....	39
Watching your saved videos.....	40
<b>Music</b> .....	<b>41</b>
Music store.....	41
Transferring music onto your phone.....	41
<b>Voice recorder</b> .....	<b>43</b>
Using the Voice recorder.....	43
Recording your voice memo.....	43
Sending a voice recording.....	43
<b>My stuff</b> .....	<b>44</b>
Images.....	44
Pictures options menu.....	44
Sending a photo.....	45
Organising your images.....	45
Deleting an image.....	45
Creating a slide show.....	46
Sounds.....	46
Using a sound.....	46
Videos.....	46
Watching a video.....	47
Using options while video is played.....	47
Sending a video clip.....	47
Games / Applications.....	48
Others.....	48
<b>Games &amp; apps</b> .....	<b>49</b>
Games & apps.....	49
Playing a game.....	49
<b>05 GET ORGANISED</b>	
<b>Organiser</b> .....	<b>50</b>
Adding an event to your calendar.....	50
Editing a calendar event.....	50
Sharing a calendar event.....	51

# Contents

Adding To-do list.....	51	<b>07 SETTINGS</b>	
Adding a memo.....	51	<b>Settings.....</b>	<b>56</b>
Date finder.....	51	Changing your profiles.....	56
<b>Tools.....</b>	<b>52</b>	Customising your profiles.....	56
Quick menu.....	52	Changing your date & time.....	56
Setting your alarm.....	52	Changing the language.....	57
Using your calculator.....	52	Changing your security settings..	57
Using the stopwatch.....	53	Changing your display settings...	57
Converting a unit.....	53	Resetting your phone.....	58
Adding a city to your World		Viewing memory status.....	58
time.....	53	<b>Connectivity.....</b>	<b>59</b>
<b>06 BROWSER</b>		Changing your connectivity	
<b>Browser.....</b>	<b>54</b>	settings.....	59
Accessing the web.....	54	Changing your Bluetooth	
Adding and accessing your		settings.....	60
bookmarks.....	54	Pairing with another Bluetooth	
RSS reader.....	55	device.....	60
Saving a page.....	55	Using a Bluetooth headset.....	61
Accessing a saved page.....	55	Transferring a file to your phone .	61
Viewing your browser history.....	55	Sending and receiving your files	
Changing the web browser		using Bluetooth.....	62
settings.....	55	USB connection mode.....	63
		Always ask mode.....	63



Mass storage-Use your phone as a mass storage device.....	63
PC suite-Synchronise your phone with your PC.....	64
Phone Software update.....	66

## **08 ACCESSORIES**

<b>Accessories .....</b>	<b>67</b>
<b>Technical data .....</b>	<b>68</b>
General .....	68
Ambient Temperatures .....	68

# Guidelines for safe and efficient use

Please read these simple guidelines. Not following these guidelines may be dangerous or illegal.

## Exposure to radio frequency energy

### **THIS DEVICE MEETS INTERNATIONAL GUIDELINES FOR EXPOSURE TO RADIO WAVES**

Your mobile device is a radio transmitter and receiver. It is designed and manufactured not to exceed the limits for exposure to radio frequency (RF) recommended by international guidelines (ICNIRP). These limits are part of comprehensive guidelines and establish permitted levels of RF energy for the general population. The guidelines were developed by independent scientific organisations through periodic and thorough evaluation of scientific studies. The guidelines include a substantial safety margin designed to assure the safety of all persons, regardless of age and health.

The exposure standard for mobile devices employs a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit stated in the international guidelines is 2.0 W/kg\*. Tests for SAR are conducted using standard operating positions with the device transmitting at its highest certified power level in all tested frequency bands.

Although the SAR is determined at the highest certified power level, the actual SAR of the device while operating can be well below the maximum value. This is because the device is designed to operate at multiple power levels so as to use only the power required to reach the network. In general, the closer you are to a base station, the lower the power output of the device. Before a phone model is available for sale to the public, compliance with the European R&TTE directive must be shown. This directive includes as one essential requirement the protection of the health and the safety for the user and any other person.

The highest SAR value for this device when tested for use at the ear is 1.00 W/kg.

This device meets RF exposure guidelines when used either in the normal use position against the ear or when positioned at least 1.5 cm away from the body. When a carry case, belt clip or holder is used for body-worn operation, it should not contain metal and should position the product at least 1.5 cm away from your body. In order to transmit data files or messages, this device requires a quality connection to the network. In some cases, transmission of data files or messages may be delayed until such a connection is available.

Ensure the above separation distance instructions are followed until the transmission is completed. The highest SAR value for this device when tested for use at the body is 1.08 W/kg.

\* The SAR limit for mobile devices used by the public is 2.0 watts/kilogram (W/kg) averaged over ten grams of body tissue. The guidelines incorporate a substantial margin of safety to give additional protection for the public and to account for any variations in measurements. SAR values may vary depending on national reporting requirements and the network band.

For SAR information in other regions please look under product information at [www.lgmobile.com](http://www.lgmobile.com).

# Guidelines for safe and efficient use

## Product care and maintenance

### **WARNING**

Only use batteries, chargers and accessories approved for use with this particular phone model. The use of any other types may invalidate any approval or warranty applying to the phone, and may be dangerous.

- Do not disassemble this unit. Take it to a qualified service technician when repair work is required.
- Keep away from electrical appliances such as TVs, radios, and personal computers.
- The unit should be kept away from heat sources such as radiators or cookers.
- Do not drop.
- Do not subject this unit to mechanical vibration or shock.
- Switch off the phone in any area where you are required by special regulations. For example, do not use your phone in hospitals as it may affect sensitive medical equipment.
- Do not handle the phone with wet hands while it is being charged. It may cause an electric shock and can seriously damage your phone.
- Do not to charge a handset near flammable material as the handset can become hot and create a fire hazard.
- Use a dry cloth to clean the exterior of the unit (do not use solvents such as benzene, thinner or alcohol).
- Do not charge the phone when it is on soft furnishings.
- The phone should be charged in a well ventilated area.
- Do not subject this unit to excessive smoke or dust.
- Do not keep the phone next to credit cards or transport tickets; it can affect the information on the magnetic strips.

- Do not tap the screen with a sharp object as it may damage the phone.
- Do not expose the phone to liquid or moisture.
- Use the accessories like earphones cautiously. Do not touch the antenna unnecessarily.

## **Efficient phone operation**

### **Electronic and medical devices**

All mobile phones may get interference, which could affect performance.

- Do not use your mobile phone near medical equipment without requesting permission. Please consult your doctor to determine if operation of your phone may interfere with the operation of your medical device.
- Some hearing aids might be disturbed by mobile phones.
- Minor interference may affect TVs, radios, PCs, etc.

### **Pacemakers**

Pacemaker manufacturers recommend that a minimum separation of 15cm be maintained between a mobile phone and a pacemaker to avoid potential interference with the pacemaker. To achieve this use the phone on the opposite ear to your pacemaker and do not carry it in a breast pocket.

### **Hospitals**

Switch off your wireless device when requested to do so in hospitals, clinics or health care facilities. These requests are designed to prevent possible interference with sensitive medical equipment.

# Guidelines for safe and efficient use

## Road safety

Check the laws and regulations on the use of mobile phones in the area when you drive.

- Do not use a hand-held phone while driving.
- Give full attention to driving.
- Use a hands-free kit, if available.
- Pull off the road and park before making or answering a call if driving conditions so require.
- RF energy may affect some electronic systems in your vehicle such as car stereos and safety equipment.
- When your vehicle is equipped with an air bag, do not obstruct with installed or portable wireless equipment. It can cause the air bag to fail or cause serious injury due to improper performance.

- If you are listening to music whilst out and about, please ensure that the volume is at a reasonable level so that you are aware of your surroundings. This is particularly imperative when near roads.

## Avoid damage to your hearing

Damage to your hearing can occur if you are exposed to loud sound for long periods of time. We therefore recommend that you do not turn on or off the handset close to your ear. We also recommend that music and call volumes are set to a reasonable level.

## Glass Parts

Some parts of your mobile device are made of glass. This glass could break if your mobile device is dropped on a hard surface or receives a substantial impact. If the glass breaks, do not touch or attempt to remove. Stop using your mobile device until the glass is replaced by an authorized service provider.

## **Blasting area**

Do not use the phone where blasting is in progress. Observe restrictions, and follow any regulations or rules.

## **Potentially explosive atmospheres**

- Do not use the phone at a refueling point.
- Do not use near fuel or chemicals.
- Do not transport or store flammable gas, liquid, or explosives in the same compartment of your vehicle as your mobile phone and accessories.

## **In aircraft**

Wireless devices can cause interference in aircraft.

- Turn your mobile phone off before boarding any aircraft.
- Do not use it on the ground without permission from the crew.

## **Children**

Keep the phone in a safe place out of the reach of small children. It includes small parts which may cause a choking hazard if detached.

## **Emergency calls**

Emergency calls may not be available under all mobile networks. Therefore, you should never depend solely on the phone for emergency calls. Check with your local service provider.

## **Battery information and care**

- You do not need to completely discharge the battery before recharging. Unlike other battery systems, there is no memory effect that could compromise the battery's performance.
- Use only LG batteries and chargers. LG chargers are designed to maximize the battery life.
- Do not disassemble or short-circuit the battery pack.

## Guidelines for safe and efficient use


- Keep the metal contacts of the battery pack clean.
- Replace the battery when it no longer provides acceptable performance. The battery pack may be recharged hundreds of times until it needs replacing.
- Recharge the battery if it has not been used for a long time to maximize usability.
- Do not expose the battery charger to direct sunlight or use it in high humidity, such as in the bathroom.
- Do not leave the battery in hot or cold places, this may deteriorate the battery performance.
- There is risk of explosion if the battery is replaced by an incorrect type.
- Dispose of used batteries according to the manufacturer's instructions. Please recycle when possible. Do not dispose as household waste.
- If you need to replace the battery, take it to the nearest authorized LG Electronics service point or dealer for assistance.
- Always unplug the charger from the wall socket after the phone is fully charged to save unnecessary power consumption of the charger.
- Actual battery life will depend on network configuration, product settings, usage patterns, battery and environmental conditions.



# Getting to know your phone




# Open view

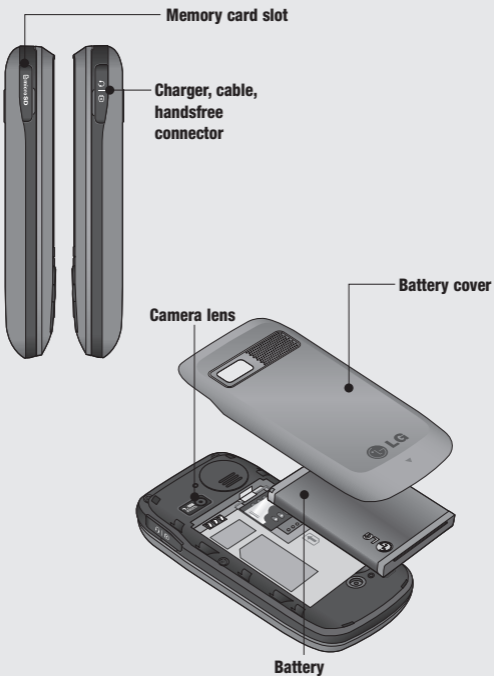

# Installing the USIM and battery

## 1 Remove the battery cover

Press the battery cover release latch. The battery cover should slide and lift off easily.



## 2 Remove the battery

Lever the bottom edge of the battery and remove it carefully from the battery compartment.



**WARNING:** Do not remove the battery when the phone is switched on, as this may damage the phone.

## 3 Install the USIM card

Slide the USIM card into the USIM card holder. Make sure that the gold contact area on the card is facing downwards. To remove the USIM card, push it out of the holder from the top.

**WARNING:** Do not insert the USIM card when the slide is open, as this may damage your phone and USIM card.

# Installing the USIM and battery



## 4 Install the battery

Insert the top of the battery first into the top edge of the battery compartment. Ensure the battery contacts align with the terminals on the phone. Press the bottom of the battery down until it clips into place.




## 5 Replace the battery cover

Insert the top of the battery cover and push down and slide until it clicks into place.



## 6 Charging your phone

Pull open the cover of the charger socket on the side of your GU285. Insert the charger and plug into a mains electricity socket. Your GU285 will need to be charged until a message reading **Fully Charged** appears on screen.

 **WARNING:** Do not charge the phone when it is on soft furnishings. The phone should be charged in a well ventilated area.



# Memory card

## Installing a memory card

You can expand the memory space available on your phone using a memory card.

**NOTE:** A memory card is an optional accessory.

Open the memory card cover. Slide the memory card into the slot until it clicks into place. Make sure that the gold contact area is facing downwards.




## Removing a memory card


Open the cover and carefully remove the memory card by gently pushing it in to the phone and quickly releasing it, as shown in the following diagram:



## Formatting a memory card

Your memory card may already be formatted. If not you will need to do so before you can begin using it.

- 1 From the Home screen press  and select **Settings**.
- 2 Choose **Memory info** and select **External memory**.
- 3 Press **Format** and enter the password, which is set to 0000 as default. Your card will be formatted and ready to use.










 **WARNING:** When you format your memory card, all the content will be wiped. If you do not want to lose the data on your memory card, back it up first.

# Your Home screen













## The status bar

The status bar uses various icons to indicate things like signal strength, new messages and battery life, as well as telling you whether your Bluetooth connection is active.

The table below explains the meaning of icons you're likely to see in the status bar.




Icon	Description
	Network signal strength (number of bars will vary)
	No network signal
	GPRS available
	3G available
	EDGE available
	Flight mode is activated
	Calls are diverted
	Roaming service
	WAP service is connected

**TIP!** You can quickly access chosen menus using your **Favourites** list. In standby mode press programmable hot key. Select <Empty>, and then **Select** to add a menu as a favourite.

Icon	Description
	Multitasking available
	Memory card installed
	An alarm is set
	Schedule
	New message
	New voice message
	Normal profile in use
	Silent profile in use
	Outdoor profile in use
	Headset profile in use
	Remaining battery life
	Battery empty


# Calls

## Making a call


- 1 Make sure your phone is on.
- 2 You can use the keypad after opening the slide. To delete a digit press  or the back arrow.
- 3 Press  to begin the call.
- 4 To end the call, press  or slide the cover closed.

**TIP!** To enter + when making an international call, press and hold **0**.

## Making a call from your contacts

- 1 Select **Contacts** in the menu and then **Search**.
- 2 Using the keypad, enter the first letter of the contact you want to call and scroll to the contact.
- 3 Press  to begin the call.

## Answering and rejecting a call


When your phone rings, press **Accept** or press  to answer the call.

While your phone is ringing you can press **Silent** to mute the ringing. This is useful if you have forgotten to change your profile to **Silent** for a meeting.

Press  or select **Reject** in order to reject an incoming call.


## Speed dialling

You can assign a speed dial number to a contact you call frequently.

- 1 Press  to open the main menu. Select **Contacts**, then select **Speed dials**.
- 2 Your voicemail is preset to speed dial 1 and you cannot change this. Select any other number either by using the navigation keys and selecting **Set** or by pressing the hard key number.



- 3** Your address book will open.  
Select the contact you'd like to assign to that number using the navigation keys then select **OK**.

To call a speed dial number, press and hold the assigned number until the contact appears on screen. The call will begin automatically and there is no need to press .

## Viewing your call logs

Press  and select **Calls**.

**All calls** - View a complete list of all your dialled, received and missed calls.

**Missed calls** - View a list of any calls you have missed.

**Dialled calls** - View a list of all the numbers you have called.

**Received calls** - View a list of all the numbers that have called you.

**Call duration** - View details of how long you have spent on your calls; Last, dialled, received and All.

**Call costs** - View the charges applied to your last call or all calls. This service is network dependent, some operators are unable to support this.


**Data volume** - View the amount of all your received and sent data in Kilo bytes.

**TIP!** From any call log select **Options** and then **Delete** to delete selected items.

**TIP!** Use the navigation keys to highlight any single call entry in order to view the date and time of the call. To view the call duration select **View**.

# Calls


## Using call divert

- 1 Press , select **Settings**.
- 2 Select **Call- Call divert**. Or you can choose Deactivate all.
- 3 Choose whether to divert all calls, when the line is busy, when there is no answer, when you are out of reach.
- 4 Choose **Activate** and input number to be diverted.
- 5 Enter your divert number or select **Search** to browse **Contacts** for your divert number.

**Note:** Charges are incurred for diverting calls. Please contact your network provider for details.

**TIP!** To turn off all call diverts, choose **Deactivate all** from the **Call divert** menu.

## Using call barring

- 1 Press , select **Settings**.
- 2 Select **Call- Call barring**.
- 3 Choose any or all of the five options:

### Outgoing calls

#### International calls

#### International calls except home country


#### Incoming calls

#### Incoming calls when abroad

- 4 Select **Activate** and enter the call barring password. Please check with your network operator for this service.

**TIP!** Select **Fixed dial number** from the **settings - call** menu to turn on and compile a list of numbers which can be called from your phone. You'll need your PIN2 code from your operator. When activated, only numbers included in the fixed dial list can be called from your phone.

## Changing the call settings

- 1 Press , select **Settings- Call**.
- 2 From here you can amend the settings for:

**Call divert** - Choose whether to divert your calls.

**Call barring** - Select which calls you would like to be barred.

**Call waiting** - Be alerted when you have a call waiting.

**Fixed dial number** - Choose a list of numbers that can be called from your phone.

**Excuse message** - Save the predefined notification message before you reject a call.

**Common settings** - Refer to below contents in details.

## Common settings

**Answer mode** - Allows you to set the answering method. You can choose between Press send key, Slide up and Press any key.

### Send my number

**Set by network** - Configures with the default settings determined by the service provider.

**On** - Your number will be sent when making an outgoing call.

**Off** - Your number will be withheld when making an outgoing call.

**Minute minder** - Determines whether to sound a tone every 1 minute when you are on the phone.

**Auto redial** - Allows you to set the auto redial function when a call attempt has failed.


**Send DTMF** - DTMF allows you to use numerical commands to navigate menus within automated messages.

# Calls

**Save new number** - Selecting this option will save numbers that are not already in your contacts upon ending the call.

## **BT answer mode**

**Hands-free** - You can answer a call using a Bluetooth headset.


**Handset** - Press  on the handset to answer a call when using a Bluetooth headset.

**Hang up mode** - Set whether or not a call is ended upon closing the slide.

**Call reject** - You can set whether to reject incoming calls.

# Contacts

## Searching for a contact

- 1 Select **Contacts** from the main menu, and choose .
- 2 Using the keypad enter the first letter of the name of the contact you want to call.
- 3 To scroll through the contacts and their different numbers use the navigation keys.

## Adding a new contact

- 1 Select **Contacts** and press left soft key **Options**.
- 2 Select **Create new contact**.
- 3 Choose whether to store your new contact on your **Handset** or **USIM** card.
- 4 Enter the information you want in the fields provided and select **Done**.

Or to use a slightly quicker method...


- 1 Enter the number you wish to store and press **Options**.
- 2 Choose **Save number**, and choose either **New contact** or **Update contact**.
- 3 Enter the relevant information and select **Done**.

## Adding a contact to a group

You can save your contacts into groups. This is useful for keeping your work colleagues and family separate, for example. There are a number of groups including **Family**, **Friends**, **Colleagues**, **School** and **VIP** already set up on your phone.

- 1 Select **Contacts** and choose **Groups**.
- 2 Scroll to the group you wish to add a contact to and select **View** then select.

# Contacts

- 3 Your contacts list will open. Scroll to any contacts you would like to add to the group and press , then select **Done**.

**TIP!** You can assign a ringtone to a group. Select the group you wish to assign the ringtone to, select **Options** and Edit Group - Group ringtone

**Note:** You can only assign a contact to a group or add a picture to a contact that is saved in your phone (not SIM) memory.

## Adding a picture to a contact

You can change the appearance of your contacts in your address book to include a picture.

- 1 Select **Contacts** and choose **Create new contact**.
- 2 Select square image to edit and insert a picture.
- 3 Choose **Change**.

- 4 Choose **No image, Go to images**, and **Take a picture**. If you select **Go to images**, you can choose an image that is saved in your phone memory. If you select **Take a picture**, your camera viewfinder will open, so you can take a picture of your contact. Take the picture then press **Insert**.
- 5 Select **Done**.


## Copying your contacts to your USIM / Handset

You can also choose to copy your contacts from your USIM to your handset or from your handset to your USIM.


- 1 Select **Contacts**, choose **options - Storage location**.
- 2 Select the menu Copy to **USIM / Handset** or Move to **USIM / Handset**.
- 3 Select **Done** if you are sure.

# Messaging

## Messaging

Your GU285 includes functions related to SMS (Short Message Service), MMS (Multimedia Message Service) and email, as well as the network's service messages. To use these functions press  and select **Messaging**.

## Sending a message

- 1 Create a new message press , select **Messaging** and choose **Create new message**.
- 2 Choose **Message** to send an SMS or MMS.
- 3 A new message editor will open. Message editor combines SMS and MMS in one intuitive mode that is easy to switch between. The default setting of the message editor is SMS mode.
- 4 Enter your message using the keypad. See **Entering text** on the right for more information on how to enter text.

- 5 Select **Options** and choose **Insert** to add an **Image, Video, Sound, Symbols, Template, Emoticon, Name & Number, New slide, Subject** or **More**.
- 6 Choose a contact from the list of contacts or enter the phone number from **More**.
- 7 Select **Send**.



**WARNING:** If an **Image, Sound, Video, New slide** or **Subject** is added to the message editor, it will be automatically converted to MMS mode and you will be charged accordingly.

# Messaging

## Entering text

You can enter alphanumeric characters using the phone's keypad. For example, storing names in Contacts, writing a message and creating scheduling events in the calendar all require entering text. The following text input methods are available in the phone: T9 mode, Abc mode, and 123 mode.


**Note:** Some fields may allow only one text input mode (e.g. telephone number in address book fields).

## Text input mode using the keypad

When you want to enter text, for example when writing a message, the keypad will default to T9 mode. If you are entering a number, for example when making a call, the keypad number keys will default to numbers.


## Setting up your email

You can stay in touch on the move using email on your GU285. It's quick and simple to set up a POP3 or IMAP4 email account.

- 1 Press , select **Messaging** and choose **Settings**.
- 2 Select **E-mail** and then choose **E-mail accounts**.
- 3 Select **Add** and follow the pop up instruction and enter the information required.

## Sending an email using your new account


To send/receive an email, you should set up an email account (see above).

- 1 Press , select **Messaging** and choose **Create new message**.
- 2 Choose **E-mail** and a new email window will open.
- 3 Write a subject line then press OK.
- 4 Enter your message using the keypad.



**MailBox** - This contains all your email messages. Select the account you want to use then select **Retrieve**. Your GU285 will connect to your email account and retrieve your new messages.

## Message folders

Press , then select **Messaging**. The folder structure used on your GU285 should be self-explanatory.

**Create new message** - Create your new message.

**Inbox** - All the messages you receive are placed into your Inbox. From here you can reply, forward and more. See **Managing your messages**.

## Managing your messages

**Mailbox** - All the mails you receive are placed into your Mailbox.

**Drafts** - If you don't have time to finish writing a message, you can save what you have written so far in here.

**Outbox** - This is a temporary storage folder used while messages are being sent and the messages which are failed to send.

**Sent items** - Copies of all the messages you send are kept into your Sent folder.


**My folders** - You can move messages of Inbox or Sent messages into My folders. Also you can move those messages of My folders into the original message box.

**Templates** - A list of pre written useful messages which you can edit, useful for a quick reply.

**Emoticons** - You can add, edit and delete emoticons. You can insert the emoticon which you preferred on writing a message.

## Managing your messages

You can use your **Inbox** to manage your messages.

- 1 Press , select **Messaging** and choose **Inbox**.
- 2 Select **Options** and then choose to:

**Reply** - Send a reply to the selected message.

# Messaging

**Forward** - Send the selected message on to another person.

**Call** - Call the person who sent you the message.

**Save number** - Save the number of the message.

**Delete** - Delete the selected message.

**Create new message** - Write a new Message, Email. regardless who sent you message.

**Multi selection** - Mark a message or all.

**Copy&Move** - Choose to copy or move the selected message to the SIM card or Handset.

**Filter** - Displays messages by desired message types.


**Message info** - You can check the of its type, subject, where it is from, and its date.

If you see the message **No space for SIM message**, you should delete some messages from your inbox to create space.

If you see the message **No space for messages**, you can delete either messages or saved files to create more space.

## Using templates

You can create templates for the **Text** and **Multimedia** messages you send most frequently. There are some templates already on your phone, which can be edited if you wish.


- 1 Press , select **Messaging** and choose **Templates**.
- 2 Choose **Text templates** or **Multimedia templates**. In text template menu, you can then select **Options** and choose **Edit** to change existing templates, or **Add new** to create new template.
- 3 To send a template, select **Messaging** and choose **Create new message**. Choose **Message**
- 4 Choose **Options** and select **Insert**, choose **Template**.

- 5 Choose template you want to send and select **Send**.

## Changing your text message settings

Your GU285 message settings are pre-defined so that you can send messages immediately.

If you would like to change the settings, you can do this using the **Settings** options.

Press , select **Messaging**, then choose **Settings** and **Text message**. You can make changes to:

**Text Message centre** - Enter the details for your message centre.

**Delivery report** - Choose to receive confirmation that your message was delivered.

**Validity period** - Choose how long your message is stored at the message centre.

**Message types** - Convert your text into Voice, Fax, X.400 or Email.


**Character encoding** - Choose how your characters are encoded. This affects the size of your message and therefore data costs.

**Send long text as** - Choose whether to send your message as Multiple SMS or MMS when you enter a text longer than 2 pages in the message field.

## Changing your multimedia message settings

Your GU285 message settings are pre-defined so that you can send messages immediately.

If you would like to change the settings, you can do so using the **Settings** options.

Press , select **Messaging**, then choose **Settings** and **Multimedia message**.

You can make changes to:

**Retrieval mode** - Choose to automatically or manually download multimedia messages depending on whether you are at home or roaming.

# Messaging

**Delivery report** - Choose to request or allow a delivery report.

**Read reply** - Choose to request or allow a read reply.

**Priority** - Choose the priority level of your multimedia message.

**Validity period** - Choose how long your message is stored at the message centre.

**Slide duration** - Choose how long your slides appear on screen.


**Creation mode** - Allows you to select the contents type supported by MMS. (**Restricted, Warning and Free**)

**Delivery time** - Configures the delivery time of message to the recipient. The Multimedia message centre will deliver the message after the delivery time

**MMS centre** - Allows you to configure network information such as the MMSC and the Internet profile, to send a multimedia message.

## Changing your email settings

You can adapt your email settings to your own preferences.

- 1 Press , select **Messaging** and choose **Settings**.
- 2 Select **E-mail** then you can adapt the following settings:

**E-mail accounts** - You can set up an email account.

**Allow reply e-mail** - Determines whether to allow sending a read confirmation mail for a read confirmation mail request.

**Request reply e-mail** - Determines whether to request a read confirmation mail.

**Retrieve interval** - Choose how often your GU285 checks for new email messages.

**Retrieve amount** - Choose how many e-mails are retrieved in selected time.

**Include message in fwd & reply** - Choose whether or not to include the original message.

**Include attachment** - Choose whether or not to include the original attachment.

**Auto retrieval in roaming** - Choose whether or not to automatically retrieve your messages when abroad.

**New e-mail notification** - Choose whether or not to be alerted to new emails.

**Signature** - Create an email signature and switch this feature on.

**Priority** - Choose the priority level of your email messages.

## Changing your other settings



**Voicemail** - You can edit the Voicemail.

**Service message** - Here you can switch off Service message, which means your messages will no longer be pushed directly to your device as they are received, only when you check for new messages. You can also change your service message security.

**Info. service** - Choose the Cell broadcast, channels and language of your info messages.


# Camera

## Taking a quick photo


- 1 Press  and Select **Camera** to open the viewfinder.
- 2 Holding the phone and, point the lens towards the subject of the photo.
- 3 Position the phone so you can see the subject of your photo.
- 4 Press  to take a photo.


## Before you take your photo


Press **Preview** in **Settings** for the following options: Some of those settings will be shown at **Video Camera** Settings, too.


 **Image size** - See **Changing the image size** on page 38.


**Preview size** - Select the preview image: **Full image** or **Full screen**.


 **Effect** - Choose from four colour tone options: **None** (normal colour), **Sepia**, **Black & White** or **Negative**.

 **White balance** - The white balance ensures that any white in your photo is realistic. In order for your camera to correctly adjust the white balance you may need to determine the light conditions. Choose from **Auto**, **Incandescent**, **Sunny**, **Indoors** or **Cloudy**.

 **Night mode** - You can take better pictures at night by selecting **On**.

 **Timer** - The timer allows you to set a delay after the capture button is pressed before the camera fires. Choose from **None**, **3 Sec**, **5 Sec** or **10 Sec**. Great for when you want to include yourself in the photo.

 **Shot Mode** - Choose from **Normal**, **Burst shot** and **Frame shot**. **Burst shot** lets you to take up to **Three**, **Six**, **Nine** shots automatically in very quick succession, great for taking photos of moving objects or at sporting events.

 **Quality** - Choose between **Super fine**, **Fine** and **Normal**. The finer the quality, the sharper a photo will be. The file size will increase as a result, which means you will be able to store fewer photos in your memory.

Press **Others** in Settings for the following options:


**Memory** - Check the current status: Handset/ External.


**Hide icons** - Select the display of icon: Auto/ Manual.


**Sound** - Select shutter sound when taking a picture.


## After you've taken your photo


Your captured photo will appear on the screen. The name of the image is shown at the top of the screen and you will see five options displayed on the left side of the screen.

 **Images** - Choose this to look at the other photos in your album. Your current photo will be saved.

 **Send** - Select this send the photo as a **Message**, **Email** and **Bluetooth**. See page 29 for **Sending a message**.

 **New** - Use this to take another photo straightaway. Your current photo will be saved.

 **Use as** - Select to open a sub menu to use your image as **Wallpaper**, **Picture ID**, **Start up** or **Shut down**.

 **Delete** - Deletes the photo you have just taken. Confirm this by selecting **Yes**. The viewfinder will reappear.


# Camera

## Changing the image size

You can change the size of the photo to save memory space. The more pixels means the larger the file size, this in turn means they take up more of your memory. If you want to fit more pictures on your phone you can alter the pixel number to make the file size smaller.

- 1 Press **Settings** and select **Image size** from the toolbar.
- 2 Select a pixel value from the six numerical options.
- 3 Press **OK** to save your changes.

## Viewing your saved photos

- 1 You can access your saved photos from within the camera mode and also from the Home screen. From the viewfinder, simply press **Album**. From the Home screen press , then select **My stuff** and **Images**.
- 2 Your gallery , Download image and Default images folder will appear on screen.

- 3 Use the navigation keys to select the photo you want to view and select **View** to open it.

## Setting a photo as Wallpaper


From your image gallery, use the navigation keys to select an image and choose **Options** and **Set as** to use the selected image as **Wallpaper, Picture ID Start-up or Shut down, Incoming call or Outgoing call**. When you set the photo as Picture ID you can choose which part of the photo to use.

**Note:** Picture ID can only be added to contacts saved to your phone, not your SIM.



# Video camera

## Shooting a quick video



- 1 Press  and select **Camera**.
- 2 Choose **Video camera**.
- 3 Point the camera lens towards the subject of the video.
- 4 Press OK to start recording.
- 5 **Rec** will appear in the bottom right corner of the viewfinder and a timer will show the length of your video.
- 6 To pause the video select **Pause** and resume by selecting **Resume**.
- 7 Select **Stop** to stop recording.

## Before you take your video

**Videos** - Select to look at the other video clips in your album

**Camera** - Convert from video camera mode to still camera mode.


**Rec.** - Start video recording


**Zoom** - Adjust the zoom using  or .


**Brightness** - The higher the level, the brighter the screen.


## After you've shot your video


The name of the video is shown along the bottom of the screen and five options will be displayed at the bottom of the screen.

 **Videos** - Select to look at the other video clips in your album. Your current video clip will be saved.

 **Play** - Select to play the video you have just recorded.



 **New** - Select to shoot another video straight away. Your current video will be saved.

 **Send** - Select to send the video as a **Message**, **E-mail** or **Bluetooth**. See page 29 for **Sending a message**.

 **Delete** - Delete the video you have just recorded and confirm by selecting Yes. The viewfinder will reappear.

# Video camera


## Watching your saved videos

- 1 You can access your saved videos either from within video camera mode or from the Home screen. Simply select **Album**. From the Home screen you should press , then select **My stuff** and **Videos**.
- 2 Your gallery will appear on screen.
- 3 Use the navigation keys to select the video you want to view and press  key to watch it.

# Music

## Music store

Your LG GU285 has a built-in MP3 player so you can play all your favourite music.

To access the MP3 player, press  and select **Music**. From here you have access to:

**Last played song** - You can replay the music which you recently listened.

**All songs** - Contains all of the songs you have on your phone.

**My playlists** - Contains any playlists you have created.

**Artists** - Browse through your music collection by artist.

**Albums** - Browse through your music collection by album.

**Genres** - Browse through your music collection by genre.

**Shuffle tracks** - Plays tracks in random order

## Transferring music onto your phone

The easiest way to transfer music onto your phone is via Bluetooth or your sync cable. To transfer music using Bluetooth:

- 1 Make sure both devices have Bluetooth switched on and are visible to one another.
- 2 Select the music file on the other device and choose to send it via Bluetooth.
- 3 When the file is sent you should to accept it on your phone by selecting **Yes**.
- 4 The file should appear in **All songs**.

**Note** : As a result of the Digital Rights Management (DRM) system, some of the media items you download from the Internet or receive by MMS may have a "Purchase right" menu to access them. You can acquire the key to purchase the right from the website which owns the rights to the contents.

# Music



Music is copyright protected in international treaties and national copyright laws. It may be necessary to obtain permission or a licence to reproduce or copy music. In some countries national law prohibits private copying of copyrighted material. Please check the national legislation of the applicable country concerning the use of such material.

# Voice recorder

## Using the Voice recorder

Use your **Voice recorder** to record voice memos or other sounds.

## Recording your voice memo

- 1 Press  and select **Tools**, then choose **Voice recorder**.
- 2 Press  key to begin recording.
- 3 Choose **Stop** to end the recording.
- 4 Press **Options** and select **Play** to listen to the recording.

**Note:** You can listen to all of the voice recordings you have saved by selecting **Go to sounds**.

## Sending a voice recording

- 1 Once you have finished recording, select **Options**.
- 2 Select **Send via** and choose from **Message**, **Email**, and **Bluetooth**. If you choose **Message** or **Email**, the recording will be added to the message and you can write and send it as normal. If you choose **Bluetooth**, you will be prompted to turn Bluetooth on.

# My stuff

You can store any multimedia files in your phone memory so that you have easy access to all of your pictures, sounds, videos and games. You can also save your files to a memory card. The advantage of using a memory card is that you can free up space on your phone memory.

All your multimedia files are saved in **My stuff**. Press  then select **My stuff** to open a list of folders.

## Images

**Images** contains a folder of default images and default flash files pre-loaded onto your phone, images downloaded by you and images taken on your phone camera.

## Pictures options menu

The options which are available to you in **Images** depend on what type of image you have selected.

In the **Images** folder, select **Options** to bring up the following options.

**Delete** - Delete the selected image.

**Set as** - Set the selected image as your **Wallpaper**, **Picture ID**, **Start-up**, **Shut down**, **Incoming call** and **Outgoing call**.

**Rename** - Change the file name of selected image.

**Move** - To move image to a different folder.

**Copy** - To copy image to a different folder.

**Send via** - Send the selected image to a friend via **Message**, **Email**, **Bluetooth**.

**Print via Bluetooth** - Print an image file via **Bluetooth**.

**File info.** - (Name, Size, Date, Time, Resolution, Type and Protect) of the selected image.

**Multi- selection** - Select one or more image(s) to delete.

**Search** - Search the image with file name.

**Sort by** - Arrange your images by **Date**, **Type** or **Name**.


**Slide show** - Watch a slide show of your images.

**Grid view/List view** - Change the way you view your photos.


**Memory info** - You can view the memory status (Handset memory or External memory).

**Delete all** - Delete all images.


## Sending a photo

- 1 Press  then select **My stuff**.
- 2 Select **Images**.
- 3 Select a photo and choose **Options**.
- 4 Select **Send via** and choose from **Message**, **E-mail**, **Bluetooth**.
- 5 If you choose **Message** or **Email**, your photo will be attached to the message and you can write and send your message as normal. If you choose **Bluetooth**, you will be prompted to turn Bluetooth on and your phone will search for a device to send the picture to.

## Organising your images

- 1 Press  then select **My stuff**.
- 2 Select **Images**.
- 3 Choose **Options** then select **Sort by**.
- 4 Choose from **Date**, **Type** or **Name**.


## Deleting an image

- 1 Press  then select **My stuff**.
- 2 Select **Images**.
- 3 Select an image and press **Options**.
- 4 Select **Delete** and confirm by pressing **Yes**.

# My stuff

## Creating a slide show

If you want to look at all of the images on your phone, or scan through what you've got, you can create a slide show to save having to open and close each individual image.


- 1 Press  then select **My stuff**.
- 2 Select **Images**.
- 3 Choose the photo you would like to begin the slide show and select **Options**.
- 4 Choose **Slide show** and it will begin.
- 5 Press **Stop** to stop the slide show and **Back** to end the slide show and return to the **Images** folder.

During the slide show, press **Options** to choose **Full screen view**, **Landscape view** and settings. Select full screen view to view in fullscreen mode, **Landscape view** to change the orientation of the **Pictures** and settings to set the repeat type, **Duration**.

## Sounds

The **Sounds** folder contains the **Default sounds**, your **Download ringtones** and sound files downloaded by you. From here you can manage, send or set sounds as ringtones.

## Using a sound


- 1 Press  then select **My stuff**.
- 2 Scroll to and select **Sounds**.
- 3 Select a sound and press **Play** to listen to it.
- 4 Select **Options**, select **Set as** and choose from **Voice/Video Ringtone**, **Message tone**, **Start-up** and **Power off Sound**.

## Videos

The **Videos** folder shows the list of downloaded videos and videos you have recorded on your phone.



## Watching a video

- 1 Press  then select **My stuff**.
- 2 Scroll to and select **Videos**.
- 3 Select a video and press **Play**.

## Using options while video is played

By selecting **Options**, the video you are playing and you can choose from:

**Delete** - Delete the video.

**Set as** - You can use a video clip as ringtone.


**Send via** - Send via **Message, Email, Bluetooth**.

**File info** - View details of the video.

**Landscape view** - Reorientate the video.

**Repeat** - Repeat the video.

## Sending a video clip

- 1 Press  then select **My stuff**.
- 2 Scroll to and select **Videos**.
- 3 Select the video clip you want and press **Options**.
- 4 Press **Send via** and choose from **Send via - Send via Message, E-mail, Bluetooth**.
- 5 If you choose **Message** or **E-mail**, your video clip will be attached to the message and you can write and send the message as normal. If you choose **Bluetooth**, you will be prompted to turn Bluetooth on and your phone will search for a device to send the video to.

**Note:** The video may need to be resized before it can be sent by MMS. Some videos may be too large to send by MMS at all.

# My stuff

## Games / Applications

You can keep downloaded games and applications into this folder.

## Others


From the **Others** menu, you can view the files which are not saved in the Pictures, Sounds, or Videos.

# Games & apps

## Games & apps

Your GU285 comes with preloaded games to keep you amused when you have time to spare. If you choose to download any additional games or applications they will be saved into this folder.


## Playing a game

- 1 Press  and select **Games & apps** and then **Games**.
- 2 You can use this menu to download new games and play the demo games already on your phone.

**Note:** An additional cost is incurred when connecting to the game download service. Check your data charges with your network provider.


# Organiser

## Adding an event to your calendar

- 1 Press , and select **Organiser**, then **Calendar**.
- 2 Select the date you would like to add an event to. You can choose a date either by scrolling to it using the navigation keys or by selecting **Options** and **Go to date** in order to enter a date.
- 3 Select **New schedule** and scroll down to enter the time you would like your event to begin. Scroll down and enter the end time of your event.
- 4 Enter a **Subject** for the event. Use the keypad to type letters and numbers.
- 5 Scroll down again and choose whether you would like to set an **Alarm** for the event. Scroll left or right to see the available options. You can set the alarm to go off at the starting time of the event or at a set period of time before the event starts to remind you the event is coming up.


- 6 Scroll down once more to select whether the event is occurring **Once** or repeated at **Daily**, **Weekly**, **Monthly** or **Annually** intervals. Also you can choose User setting. If the event is repeated, you can also scroll down to enter an **Expiration date** for when the events will stop completely.
- 7 Select **Done** and your event will be saved in the calendar. A square cursor will mark the days of any saved events.

## Editing a calendar event

- 1 From the Home screen press , and select **Organiser**, then **Calendar**.
- 2 You can see a list of all your events. Scroll to the event you would like to edit and select **View**.
- 3 Press **Options** and Select **Edit** and scroll to the event detail you want to change. Make your modifications and select **Done** to store the edited event.

**Note:** You can delete an event from your calendar by viewing the event and then pressing **Options** and **Delete**.


## Sharing a calendar event

- 1 From the Home screen press , and select **Organiser**, then **Calendar**.
- 2 Choose the event you would like to share and select **Options**.
- 3 Choose **Send via** and select from **Text message, MMS, E-mail** or **Bluetooth**.
- 4 Press **Send** and search a contact, press **Send**

## Adding To-do list

You can view, edit and add tasks to do. Tasks are displayed in time order.

## Adding a memo

- 1 From the Home screen press , and select **Organiser**, then **Memo**.
- 2 Select **New memo** and type your memo.
- 3 Select **Save**.
- 4 Your memo will appear on screen the next time you open the memo application.

**TIP!** You can edit an existing memo. Select the one you want to edit, press **Options** and select **Edit**.

## Date finder


Date finder is a handy tool to help you calculate what the date will be after a certain amount of days has passed.

# Tools


## Quick menu

You can specify functions to save in the Quick menu. If you save frequently used functions in the Quick menu, you can quickly use them by pressing the corresponding key.


## Setting your alarm

- 1 Press , and select **Alarm clock**.
- 2 Press **New alarm**.
- 3 Scroll down and enter the time you would like the alarm to sound at.
- 4 Choose the repeat type to indicate whether you would like your alarm to sound **Once, Daily, Mon - Fri, Mon - Sat, Except holiday, or Choose weekday**.
- 5 Scroll down and choose whether you would like the alarm type.
- 6 Scroll down to choose the interval of alarm snooze.
- 7 Scroll down and enter a name for the alarm or keep the suggested name.
- 8 Select **Done**.


## Using your calculator

- 1 Press , and select **Tools**, then **Calculator**.
- 2 Press the numeric keys to input numbers.
- 3 For simple calculations, select the function you require (+, -, ×, ÷) using the navigation keys followed by =.
- 4 For more complex calculations, select **Options** to choose a command.
- 5 Select Clear key to clear the screen and start a new calculation.

## Using the stopwatch

- 1 Press , and select **Tools**, then **Stopwatch**.
- 2 Select **Start** to begin the timer.
- 3 Choose **Lap** if want to record a lap time. Up to 99 lap times can be saved
- 4 Select **Stop** to end the timer.
- 5 Choose **Resume** to restart the stopwatch at the time you stopped it at or select **Reset** to return to zero.


## Converting a unit

- 1 Press , and select **Tools**, then **Unit Converter**.
- 2 Choose whether you would like to convert **Currency, Area, Length, Weight, Temperature, Volume** or **Velocity**.
- 3 Scroll left and right to select a unit, then scroll down and enter the unit quantity.

- 4 Scroll down to the unit conversion box and choose the unit measurement you want to convert into. The conversion will show automatically in the line below.

**Note:** For Currency convert, you need to set 'Rate' according to current Exchange rate first.

## Adding a city to your World time


- 1 From the Home screen press , and select **Tools**, then **World clock**.
- 2 To find out the time of specific city, press **Options** and select **New city**.
- 3 Scroll down the list or enter the first letter of the city. Also you can select Map and choose a city.
- 4 Press Select.

**TIP!** You can select the first letter of the city required from the keypad to speed up the process

# Browser

With a browser at the tip of your fingers, you can get up to date news and weather forecasts, as well as information on sports or traffic, whenever you need it. In addition, the browser allows you to download the latest music, ringtones, wallpapers and games.


## Accessing the web

- 1 Press  and select **Browser**.
- 2 To access the browser homepage directly, select **Browser**.

**Note:** An additional cost is incurred when connecting to this service and downloading content. Check your data charges with your network provider.

## Adding and accessing your bookmarks

For easy and fast access to your favourite websites, you can add bookmarks and save web pages.

- 1 Press  and select **Browser**.
- 2 Select **Bookmarks**. A list of your bookmarks will appear on the screen.
- 3 To add a new bookmark, select **Options** and choose **New bookmark**. Enter a name for your bookmark followed by the URL.
- 4 Press **Done**. Your bookmark will now appear in the list of bookmarks.
- 5 To access the bookmark simply scroll to the required bookmark and select **Connect**. You will be connected to your bookmarked page.




## RSS reader

RSS reader provides news updates for the websites registered on your phone.

## Saving a page


- 1 Access your required web page
- 2 Choose **Options** and scroll to **Save**, select **This page**.
- 3 Select **OK**.

## Accessing a saved page


- 1 Press  and select **Browser**.
- 2 Select **Saved pages**.
- 3 Select the required page and press **Open**.

**TIP!** This menu will also allow you to delete saved pages.

## Viewing your browser history

- 1 Press  and select **Browser**.
- 2 Select **History** and select **OK**.
- 3 A list of web page titles you have accessed recently will be displayed. To access one of these pages, scroll to the required page and select **Open**.

## Changing the web browser settings

- 1 Press  and select **Browser**.
- 2 Select **Settings**.
- 3 You can choose the way your mobile handles, displays and uses information when browsing the internet. You can amend settings within **Profiles, Character encoding, Scrolling control, Show image, Java script Cache, Cookies, Security** and **Reset settings**.
- 4 Once you have changed your settings, press **Select**.

# Settings

Within this folder you can adapt your settings to make your GU285 personal to you.

**Note:** For information on call settings see page 25.

## Changing your profiles

- 1 Choose **Settings** and choose **Profiles**.
- 2 Choose from **Normal**, **Silent**, **Outdoor** and **Flight mode**.

**Tip!** Use this function to switch the flight mode **On** or **Off**. You will not be able to make calls, connect to the internet or send messages when **Flight mode** is switched **On**.

## Customising your profiles


You can customise each profile setting.

- 1 Press **Settings** and select **Profiles**.
- 2 Choose the profile you want, select **Options** and choose **Personalise**.

- 3 You can change all of the tones, its volumes and alert options from here.

## Changing your date & time

You can set functions relating to the date and time.

- 1 Press  and open **Settings**.
- 2 Select **Date & Time** and choose from the list below:

**Date & time setting** - You can enter the current time/current date set the date and time like auto update setting or daylight saving.

**Note** Select **On**, and the phone will automatically update the date and time.

**Note** Select whether to activate the daylight saving function or not. You can set the Summer time difference of selected home city for 1 hour or 2 hours.

**Time format** - You can set the time format to either 24 hours or 12 hours. You can select a city as time zone.

**Date separator** - You can set the date format (YYYY.MM.DD, DD.MM.YYYY, MM.DD.YYYY).


**Date separator** - Set the display of each date day, month, and year.

## Changing the language

Go to **Settings**, select **Phone** and choose **Language** to change the language for any text in your phone. Any change will also alter the language input mode.

## Changing your security settings

Change your security settings to keep your GU285 and the important information it holds protected.

- 1 Press  and open **Settings**.
- 2 Select **Security** and choose from the list below:

**Handset lock** - Choose a security code to lock your phone **When switch on, When SIM changed, Immediately, None**


**Lock application** - Choose the menu to lock when you use the function.

**PIN code request** - Choose a PIN code to be requested when you turn your phone on.

**Change codes** - Change your **PIN code, PIN2 code or Lock code**.

**Note:** Lock code (4 to 8 digits) The Lock code protects the unauthorized use of your phone. It is usually supplied with the phone. This code is required to delete all phone entries and to activate "Reset settings" menu. The default number is "0000".

## Changing your display settings

- 1 Press  and select **Settings**.
- 2 Select **Screen** and choose from:

**Homescreen** - Select **Home screen** and choose a wallpaper to appear on your screen, Also you can set display item.

# Settings

**Handset theme** - Quickly change the whole look of your screen.

**Menu style** - Change the menu view from **List style** to **Grid style**.

**Font** - Change the font size from Small, Medium, Large and Very large.

**Greeting Message** - After selecting On, you can write a welcome message. The message will appear on screen whenever you start-up the phone

**Backlight** - Choose how long the backlight remains on. Also, Use the navigation keys to adjust the Main screen brightness. Choose from 0%, 20%, 40%, 60%, 80% or 100%.

**TIP!** The longer the backlight is on for, the more battery power is used and you may need to charge your phone more often.

**Other screens** - Set the screen when making or receiving a call or switching on/ off the phone.

## Resetting your phone

Use **Reset settings** in **Settings** to reset all the settings to the factory definitions. You need the security code to activate this function.

## Viewing memory status

Your GU285 has three memories available: the phone, the USIM card and an external memory card (you may need to purchase the memory card separately).

You can use the memory manager to determine how each memory is used and see how much space is available.

Press **Settings** and choose **Memory info** and you will then see the current status of the memories (Handset common memory, Handset reserved memory, USIM memory External memory) in your GU285.

# Connectivity

## Changing your connectivity settings

Your connectivity settings have already been set up by your network operator, so you can enjoy your new phone straightaway. If you want to change any settings, use this menu.

Select **Connectivity**. Your options are:

**Bluetooth** - Set up your GU285 for Bluetooth use. You can adapt your visibility to other devices or search through devices your phone is paired with.

**USB connection** - You can select the USB connection mode on your phone for several uses.

**Network** - You can set **Select network** and **Network mode** settings using this menu. Also you can add a preferable network to be connected to **Preferred lists**.

**Internet profiles** - This menu shows the Internet profiles. You can create new profiles, delete or edit them using the Options menu. However, you cannot delete or edit default configurations.

**Access points** - This menu shows the access points list. You can create new profiles, delete or edit them by using the Options menu. However, you cannot delete or edit default configurations.

**Packet Data Conn.** - If you select the 'When available' option, your phone is automatically registered to a GPRS network when you switch the phone on. If you select "When needed", the GPRS connection is established for the duration of a WAP or application connection.

**Streaming settings** - Your network operator has already saved this information. You can edit it if you want to make changes.

# Connectivity

## Changing your Bluetooth settings

- 1 Select **Connectivity**, then choose **Bluetooth**.
- 2 Choose **Settings**. Make your changes to:

**My device visibility** - Set [My device visibility] [Visible] so that other devices can detect your phone when they are searching for a Bluetooth device. If you select Hidden, other devices will not be able to detect your phone when they are searching for a Bluetooth device. If you select Visible for 1 min other devices will not be able to detect your phone within 1 min.

**My device name** - You can name or rename your phone as it will appear on other devices. Your phone's name will be shown on other devices only when My device visibility is set to Visible.

**Supported services** - You can view the list of devices such as headsets and handsfree supported by this Bluetooth enabled phone.

**My address** - Check your Bluetooth address here.

**Note :** To improve security, we recommend that once you have configured or paired with a device, Visibility be set to Hidden. For incoming connections, regardless of whether or not the other device has been paired with your phone, you can choose to accept or reject the connection

## Pairing with another Bluetooth device

By pairing your GU285 and another device, you can set up a passcode protected connection. This means your pairing is more secure.

- 1 Check your Bluetooth is **Turn on** and **Visible**. You can change your visibility in the **Settings** menu, by selecting **My device visibility**, then **Visible**.
- 2 From **Bluetooth**, choose **Turn on** and Select **Search new device**

- 3 Your GU285 will search for devices. When the search is completed **Add** and **Retry** will appear on screen.
- 4 Choose the device you want to pair with, select **Add** and enter a passcode then choose **OK**.
- 5 Your phone will then connect to the other device, on which you should enter the same passcode.
- 6 Your passcode protected Bluetooth connection is now ready.

### Using a Bluetooth headset

- 1 Check your Bluetooth is **On** and **Visible**.
- 2 Follow the instructions that came with your headset to place it in pairing mode and pair your devices.
- 3 Your GU285 will then automatically connect to your Bluetooth headset and switch to headset profile.

### Transferring a file to your phone

You can also transfer files from your computer to your phone using Bluetooth.

- 1 Make sure your phone and computer have Bluetooth switched on and are visible to one another.
- 2 Use your computer to send the file via Bluetooth.
- 3 When the file is sent you will have to accept it on your phone by selecting **Yes**.

**Note:** Files sent using Bluetooth will be saved to the phone memory.

# Connectivity

## Sending and receiving your files using Bluetooth

Bluetooth is a great way to send and receive files as no wires are needed and connection is quick and easy. You can also connect to a Bluetooth headset to make and receive calls.

Before you can start sharing files using Bluetooth, you will need to pair your phone with another Bluetooth device. For information on pairing devices, see **Pairing with another Bluetooth device**.

### To switch Bluetooth on:

- 1 Select **Connectivity**, then choose **Bluetooth**.
- 2 Select **Turn on**.
- 3 Select **Turn off** to switch Bluetooth off.

### To send a file:

- 1 Open the file you want to send, typically this will be a photo, video or music file.
- 2 Select **Options** and choose **Send via**, then **Bluetooth**.

- 3 Select **Yes** to turn Bluetooth on if it is not already activated.
- 4 Your GU285 will automatically search for other Bluetooth enabled devices within range.
- 5 Choose the device you want to send the file to and select **Send**.

### To receive a file:

- 1 To receive files, your Bluetooth must be both **Turn on** and **Visible**.
- 2 A message will prompt you to accept the file from the sender. Select **Yes** to receive the file.

**TIP!** Keep an eye on the progress bar to make sure your file is sent.

**Note** The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by LG Electronics is under licence. Other trademarks and trade names are those of their respective owners.



## USB connection mode

You can select the USB connection mode on your phone for several uses.

## Always ask mode

If you set the “Ask always” as default, the phone will always prompt you to select a type of USB connection mode each time you connect the phone to a PC via the data cable. If you disable the “Ask always”, the connection mode will be the one you have manually set in Menu - Settings - Connectivity - USB Connection and one of the options Internet, Mass storage, PC Suite, or Music sync.

## Mass storage-Use your phone as a mass storage device

Your GU285 can be used as a mass storage device, just like a USB stick. This is a great way of moving your files from your computer to your phone. If you've inserted a memory card, when connecting as **Mass storage**, the phone will be displayed and external memory.

- 1 Attach the USB cable to the device.
- 2 Select Mass storage from the popup menu in the device.
- 3 A removable disk folder will open automatically on your computer, two if you have a memory card inserted, showing all the folders on your phone or memory card.
- 4 Drag and drop your photos, videos, music or documents into the correct folders.
- 5 Safely remove your phone by clicking on the **Safely remove hardware** icon in your desktop toolbar.

**Note :** This function is not available for Macintosh computer

# Connectivity

## PC suite-Synchronise your phone with your PC

You can synchronise your phone with your PC to make sure all your important details and dates match, but also to backup your files to put your mind at ease.

### Installing LG PC Suite on your computer

- 1 Go to [www.lgmobile.com](http://www.lgmobile.com) and choose Middle East first and then your country.
- 2 Select Manual & Software and click LG Mobile Support Tool application to download manual and software. Click Yes and LG PC Suite installer will then appear. (Windows XP, Windows Media Player and more).
- 3 Select the language you would like the installer to run in and click OK.
- 4 Follow the instructions on screen to complete the LG PC Suite Installer wizard.
- 5 Once installation is complete, the LG PC Suite icon will appear on your desktop.

## Connecting your phone and PC

- 1 Connect the USB cable to your phone and your PC.
- 2 Select PC Suit from the popup menu in the device.
- 3 Double click on the LG PC Suite icon on your desktop.
- 4 Click on Connection Wizard, then USB.
- 5 Click on Next, then Next again, then Finish. Your phone and PC are now connected.

## Backing up and restoring your phone's information

- 1 Attach the USB cable to the device and select the PC Suite on the screen.
- 2 Click on the Backup icon, and select Backup or Restore.
- 3 Mark the contents you would like to back up or restore. Select the location you would like to backup information to, or restore information from. Click OK.
- 4 Your information will be backed up.

## Viewing your phone files on your PC

- 1 Attach the USB cable to the device and select the PC Suite on the screen.
- 2 Click on the Contents icon.
- 3 All of the documents, flash contents, images, sounds and videos you have saved onto your phone will be displayed on the screen in the LG Phone folder.

**TIP!** Viewing the contents of your phone on your PC helps you to arrange files, organise documents and remove contents you no longer need.

## Synchronising your contacts

- 1 Attach the USB cable to the device and select the PC Suite on the phone screen.
- 2 Click on the Contacts icon.
- 3 Your PC will now import and display all contacts saved to your USIM card and handset.

- 4 Click on File and select Save. You can now select where you would like to save your contacts to.

**Note** To backup contacts saved to your USIM card, click on the SIM card folder on the left side of your PC screen. Select Edit at the top of the screen, then Select all. Right-click your contacts and select Copy to contact. Now click on the Handset folder on the left of your screen and all your numbers will be displayed.

## Synchronising your messages

- 1 Attach the USB cable to the device and select the PC Suite on the screen.
- 2 Click on the Messages icon.
- 3 All of your PC and phone messages will be displayed in folders on your screen.
- 4 Use the tool bar at the top of your screen to edit and rearrange messages.

# Connectivity

## Phone Software update

### LG Mobile Phone Software upgrade on web site

For more information and using this function, Please visit LGmobile.com site path: <http://www.lgmobile.com> - select country - Manual & software banner

This Feature allows you to upgrade your software to the latest version and conveniently on the internet without needing to visit our service center.

As the mobile phone software upgrade requires the user's full attention for the duration of the upgrade process, please be sure to check any instructions and notes that appear at each step before proceeding. Please note that removing the USB data communication cable or battery during the upgrade may seriously damage your mobile phone. To the extent permitted by law, the manufacturer takes no responsibility for loss of data during the upgrade

process. You are advised to back up any important information in advance for safekeeping as the software upgrade could result in the deletion of personal data.

# Accessories

These accessories were supplied with your GU285.

## Charger



## User Guide

Learn more about your GU285.

## Battery



### Note

- Always use genuine LG accessories. Failure to do this may invalidate your warranty.
- Accessories may be different in different regions; please check with our regional service company or agent for further inquiries.

# Technical data

## General

Product name : GU285

System : GSM850 / E-GSM900 / DCS1800 / PCS1900 / WCDMA

## Ambient Temperatures

Max : +55°C (discharging) +45°C (charging)

Min : -10°C

# Declaration of Conformity



## Suppliers Details

Name

LG Electronics Inc

Address

LG Electronics Inc. LG Twin Towers 20,  
Yeouido-dong, Yeongdeungpo-gu, Seoul, Korea 150-721

## Product Details

Product Name

GSM 850 / E-GSM 900 / DCS 1800 / PCS 1900 Quad Band and WCDMA Terminal Equipment

Model Name

GU285

Trade Name

LG

# CE 0168

## Applicable Standards Details

R&TTE Directive 1999/5/EC

EN 301 489-01 V1.6.1, EN 301 489-07 V1.3.1

EN 301 489-17 V1.2.1, EN 301 489-24 V1.4.1

EN 301 511 V9.0.2

EN 301 908-1 V3.2.1 EN 301 908-2 V3.2.1,

EN 300 328 V1.7.1

EN 50360:2001/EN62209-1:2006

EN 60950-1 : 2001

## Supplementary Information

The conformity to above standards is verified by the following Notified Body(BABT)

BABT, Forsyth House, Churchfield Road, Walton-on-Thames, Surrey, KT12 2TD, United Kingdom  
Notified Body Identification Number : 0168

## Declaration

I hereby declare under our sole responsibility that the product mentioned above to which this declaration relates complies with the above mentioned standards and Directives

Name

Issued Date

Seung Hyoun, Ji / Director

16.Oct. 2009

European Standard Center  
LG Electronics Logistics and Services B.V.  
Veluwezoom 15, 1327 AE Almere, The Netherlands  
Tel : +31 - 36-547 - 8940, Fax : +31 - 36 - 547 - 8794  
e-mail : jacob @ lge.com

  
Signature of representative







इस मैनुअल की कुछ सामग्री फोन के सॉफ्टवेयर या आपके सेवा प्रदाता के आधार पर आपके फोन से अलग हो सकती है.

# GU285 उपयोगकर्ता मार्गदर्शिका

| हिन्दी



LG द्वारा नवीनतम डिजिटल मोबाइल संचार तकनीक के साथ ऑपरेट करने के लिए डिजाइन किया गया उन्नत और कॉम्पैक्ट GU285 फोन खरीदने पर आपको बधाई.

# सामग्री

## धरशज्ञज्ञधरशज्ञ

### सुरक्षित और सक्षम उपयोग के लिए

निर्देश.....8

### 01 सेट अप

अपने फोन को जानें.....15

खोलें दृश्य.....16

USIM और बैटरी स्थापित करना.....17

स्मृति कार्ड.....20

स्मृति कार्ड स्थापित करना.....20

स्मृति कार्ड निकालना.....20

स्मृति कार्ड स्वरूपित करना.....20

### 02 आपका होम स्क्रीन

आपका होम स्क्रीन.....21

स्थिति पट्टी.....21

### 03 मुख्य बातें

कॉल्स.....22

कॉल करना.....22

अपने संपर्कों से कॉल करना.....22

कॉल का उत्तर देना और निरस्त करना.....22

स्पीड डायलिंग.....22

अपना कॉल लॉग्स देखना.....23

कॉल डाइवर्ट का उपयोग करना.....24

कॉल अवरोधन का उपयोग करें.....24

कॉल सेटिंग्स परिवर्तित करना.....25

सामान्य सेटिंग्स.....25

संपर्क.....27

कोई संपर्क खोजना.....27

नया संपर्क जोड़ना.....27

किसी समूह में संपर्क जोड़ना.....27

किसी संपर्क में चित्र जोड़ना.....28

अपने USIM / हैंडसेट पर संपर्कों की प्रतिलिपि बनाना.....28

संदेश भेजना.....29

संदेश भेजना.....29

संदेश भेजना.....29

पाठ लिखना.....30

कुंजीपैड का उपयोग करते हुए पाठ

इनपुट मोड.....30

अपनी ईमेल सेट करना.....30

अपने नए खाते का उपयोग करते हुए

ईमेल भेजना.....30

संदेश फोल्डर्स.....31

अपने संदेशों को प्रबंधित करना.....31

टेम्पलेट्स उपयोग करना.....32

अपने पाठ संदेश सेटिंग्स परिवर्तित करना.....33

अपनी मल्टीमीडिया संदेश सेटिंग्स

परिवर्तित करना.....33

अपनी ईमेल सेटिंग्स परिवर्तित करना.....34

अपनी अन्य सेटिंग्स परिवर्तित करना.....35

## 04 क्रिएटिव बनें

<b>कैमरा</b> .....	36
तुरंत फोटो लेना .....	36
आप अपना फोटो लेने से पहले .....	36
आपके द्वारा अपना फोटो लेने के बाद	37
छवि आकार को परिवर्तित कर .....	38
अपने सहेजे गए फोटोज देखना .....	38
वॉलपेपर के रूप में फोटो का चयन करना .....	38
<b>वीडियो कैमरा</b> .....	39
तुरंत वीडियो शूट करना .....	39
आप अपना फोटो लेने से पहले .....	39
आपके द्वारा आपका वीडियो शूट करने के बाद .....	39
अपने सहेजे गए वीडियोज देखना .....	40
<b>संगीत</b> .....	41
संगीत स्टोर .....	41
अपने फोन पर संगीत स्थानांतरित करना .....	41
<b>वॉइस रिकॉर्डर</b> .....	43
ध्वनि रिकॉर्डर का उपयोग करना .....	43
अपने वॉइस मेमो को रिकॉर्ड करना .....	43
वॉइस रिकॉर्डिंग को भेजना .....	43

<b>मेरी वस्तुएँ</b> .....	44
छवियाँ .....	44
चित्र विकल्प मेनू .....	44
फोटो भेजना .....	45
अपनी छवियाँ व्यवस्थित करें .....	45
एक छवि हटाना .....	45
एक स्लाइड शो बनाना .....	46
ध्वनियाँ .....	46
एक ध्वनि का उपयोग करना .....	46
वीडियो .....	46
एक वीडियो देखना .....	47
वीडियो चलाए जाने के दौरान विकल्पों का उपयोग करना .....	47
एक वीडियो क्लिप भेजना .....	47
खेल / अनुप्रयोग .....	48
अन्य .....	48
<b>खेल और अनुप्रयोग</b> .....	49
खेल और अनुप्रयोग .....	49
एक खेल खेलना .....	49
<b>05 व्यवस्थित बनें</b>	
<b>ऑर्गनाइजर</b> .....	50
अपने कैलेंडर से इवेंट जोड़ना .....	50
कैलेंडर इवेंट का संपादन करना .....	50
कैलेंडर इवेंट साझा करना .....	51

# सामग्री

टू-डू सूची जोड़ना.....	51	<b>07 सेटिंग्स</b>	
मेमो जोड़ना.....	51	<b>सेटिंग्स</b> .....	56
दिनांक ढूँढने वाला.....	51	अपने प्रोफाइल्स को परिवर्तित करना .	56
उपकरण.....	52	अपने प्रोफाइल्स को कस्टमाइज करना.....	56
त्वरित मेनू.....	52	अपना दिनांक और समय परिवर्तित करना.....	56
अपना अलार्म सेट करना.....	52	भाषा परिवर्तित करना.....	57
अपने कैल्क्यूलेटर का उपयोग करना .	52	अपनी शॉर्टकट सेटिंग्स परिवर्तित करना.....	57
स्टॉपवॉच का उपयोग करना.....	53	अपनी प्रदर्शन सेटिंग्स परिवर्तित करना.....	57
इकाई कनवर्ट करना.....	53	अपने फोन को रीसेट करना.....	58
आपके विश्व समय में एक नगर को जोड़ना .....	53	स्मृति की स्थिति देखना.....	58
<b>06 ब्राउज़र</b>		<b>कनेक्टिविटी</b> .....	59
<b>ब्राउज़र</b> .....	54	अपनी कनेक्टिविटी सेटिंग्स बदलना...59	
वेब तक पहुँच बनाना .....	54	अपनी Bluetooth सेटिंग्स बदलना....	60
अपने बुकमार्क्स को जोड़ना और उनतक पहुँच बनाना .....	54	दूसरी Bluetooth डिवाइस से जुड़ना.60	
RSS पाठक.....	55	एक Bluetooth हेडसेट का उपयोग करना.....	61
एक पृष्ठ सहेजना.....	55	एक फाइल को अपने फोन पर स्थ.ानांतरित करना.....	61
एक सहेजे गए पृष्ठ तक पहुँच बनाना	55	Bluetooth का उपयोग करके फाइलें भेजना और प्राप्त करना.....	62
अपना ब्राउज़िंग इतिहास देखना.....	55	USB कनेक्शन मोड .....	63
वेब ब्राउज़र सेटिंग्स परिवर्तित करना..	55	हमेशा पूछें मोड .....	63

व्यापक संग्रह—अपने फोन को व्यापक संग्रह डिवाइस के रूप में उपयोग करें.....	63
PC सूइट—अपने फोन को अपने PC से सिंक्रनाइज करें.....	64
फोन सॉफ्टवेयर अद्यतन.....	66

## 08 सहायक सामग्री

सहायक सामग्री.....	67
तकनीकी डेटा.....	68
सामान्य.....	68
परिवेश का तापमान.....	68

# सुरक्षित और सक्षम उपयोग के लिए निर्देश

कृपया ये सरल दिशानिर्देश पढ़ें. इन दिशानिर्देशों का पालन न करना खतरनाक या गैरकानूनी हो सकता है.

## रेडियो फ्रीक्वेंसी ऊर्जा के संपर्क में आना

यह डिवाइस रेडियो तरंगों के लिए एक्सपोजर के लिए अंतर्राष्ट्रीय दिशानिर्देशों को पूरा करता है

आपका मोबाइल डिवाइस एक रेडियो ट्रांसमीटर और रिसीवर है यह अंतर्राष्ट्रीय दिशानिर्देशा (ICNIRP) द्वारा रेडियो फ्रीक्वेंसी (RF) में एक्सपोजर के लिए सीमाओं को पार नहीं करने के लिए डिजाइन और निर्मित नहीं किया गया है. यह सीमाएँ समग्र दिशानिर्देशों का भाग हैं और सामान्य जनसंख्या के लिए १८ उर्जा के स्वीकृत स्तरों को स्थापित करती हैं. दिशानिर्देश आवधिक के माध्यम से और वैज्ञानिक अध्ययनों के माध्यम से स्वतंत्र वैज्ञानिक संगठनों द्वारा विकसित किए गए हैं. दिशानिर्देश सभी व्यक्तियों की सुरक्षा, उनके उम्र और स्वास्थ्य के बगैर, को सुनिश्चित करने के लिए डिजाइन की गई तात्त्विक सुरक्षा मार्जिन को शामिल करते हैं.

मोबाइल डिवाइसेस के लिए एक्सपोजर मानक निर्दिष्ट अवशोषण दर या SAR के रूप में ज्ञात माप की ईकाई को लागू करते हैं. अंतर्राष्ट्रीय दिशानिर्देश में SAR सीमा 2.0 W/kg\* है. SAR के लिए जाँच सभी परीक्षित फ्रीक्वेंसी बैंड्स में सर्वोच्च शक्तिशाली स्तर पर ट्रांसमिट करते हुए डिवाइस के साथ मानक ऑपरेटिंग स्थितियों का उपयोग करते हुए संचालित की जाती हैं.

हालाँकि SAR सर्वोच्च प्रमाणित पावर स्तर पर निर्धारित है, ऑपरेट करने के दौरान डिवाइस का वास्तविक SAR अधिकतम मान से नीचे हो सकता है. यह इसलिए है क्योंकि डिवाइस एकाधिक पावर स्तरों पर ऑपरेट करने के लिए डिजाइन किया गया है ताकि नेटवर्क पर पहुँचने के लिए आवश्यक पावर का उपयोग किया जा सके. सामान्य रूप से, आप बेस स्टेशन से जितने नजदीक होंगे, डिवाइस की पावर आउटपुट उतनी कम होगी फोन मॉडल को सार्वजनिक रूप से बिक्री के लिए उपलब्ध होने के पहले, यूरोपियन R&TE निर्देशों का अनुपालन को दिखाया जाना आवश्यक है. यह निर्देश किसी उपयोगकर्ता और अन्य व्यक्तियों के स्वास्थ्य और सुरक्षा के लिए आवश्यक आवश्यकताओं को शामिल करता है.



सुनने तक के लिए जाँचे गए इस डिवाइस के लिए सर्वोच्च SAR मान 1.00 W/kg है।

जब या तो कान के सामने सामान्य उपयोगिता स्थिति में सामान्य उपयोग स्थिति में उपयोग किया जाता है या जब शरीर से जब कम से कम 1.5 सेमी दूर रखा जाता है तो यह डिवाइस ९ एक्सपोजर दिशानिर्देशों को पूरा करता है। कैरी केस या बेल्ट क्लिप या होल्डर जब बॉडी-वॉर्न कार्यों के लिए उपयोग किया जाता है तो इसमें धातु नहीं होना चाहिए और उत्पाद को आपके शरीर से कम से कम 1.5 सेमी से दूर रखना चाहिए। डेटा फाइलों या संदेशों को ट्रांसमिट करने के क्रम में, डिवाइस को नेटवर्क से गुणवत्ता कनेक्शन की आवश्यकता होती है। कुछ मामलों में, डेटा फाइलों या संदेशों के ट्रांसमिशन में तब तक देर हो सकती है जब तक कनेक्शन उलब्ध नहीं है।

सुनिश्चित करें कि उपरोक्त विभाजन दूरी निर्देश तब तक अनुसरण किए जाते हैं जब तक ट्रांसमिशन पूर्ण नहीं हो जाता। सुनने तक के लिए जाँचे गए इस डिवाइस के लिए सर्वोच्च SAR मान 1.08 W/kg है।

\* सार्वजनिक रूप से उपयोग किए गए मोबाइल डिवाइसेस के लिए SAR सीमा शरीर के उत्तक के दस ग्राम पर औसत 2.0 वाट्सधकिलोग्राम (W/kg) है। दिशानिर्देश सार्वजनिक अतिरिक्त सुरक्षा को देने के लिए और मापों में किसी भिन्नता की जिम्मेदारी के लिए सुरक्षा के तात्विक मार्जिन को शामिल करते हैं। राष्ट्रीय रिपोर्टिंग आवश्यकताओं और नेटवर्क बैंड पर निर्भर SAR मान भिन्न हो सकते हैं।

अन्य क्षेत्रों की SAR जानकारी के लिए कृपया [www.lgmobile.com](http://www.lgmobile.com) पर उत्पाद जानकारी देखें।

# सुरक्षित और सक्षम उपयोग के लिए निर्देश

## उत्पाद की देखभाल और रखरखाव

### चेतावनी

इस विशेष फोन मॉडल के साथ केवल बताई गई बैटरियाँ, चार्जर्स और सहायक उपकरणों का ही उपयोग करें। किसी भी दूसरे प्रकार का उपयोग करने पर फोन पर लागू होने वाले अनुमोदन या वॉरंटी अमान्य हो सकते हैं और यह खतरनाक हो सकता है।

- इस यूनिट को डिसअसेंबल न करें। सुधारने की आवश्यकता होने पर इसे योग्य सेवा तकनीशियन के पास ले जाएँ।
- बिजली के उपकरणों जैसे टीवी, रेडियो और पर्सनल कंप्यूटर से दूर रखें।
- यूनिट को गर्मी के स्रोतों जैसे रेडिएटर्स या कुकर से दूर रखना चाहिए।
- इसे गिराएँ नहीं।
- यूनिट को मैकेनिकल कंपन या झटकों से बचाएँ।
- जिस किसी भी क्षेत्र में विशेष नियम के तहत आवश्यक हो, वहाँ फोन बंद कर दें। उदाहरण के लिए, अपने फोन का उपयोग अस्पतालों में न करें, क्योंकि यह संवेदनशील मेडिकल उपकरणों को प्रभावित कर सकता है।

- चार्ज होते समय फोन को गीले हाथों से न पकड़ें। इससे बिजली का झटका लग सकता है और आपके फोन को गंभीर रूप से क्षति हो सकती है।
- हैंडसेट को ज्वलनशील सामग्री के पास चार्ज न करें, क्योंकि हैंडसेट गर्म होकर आग का कारण बन सकता है।
- यूनिट को बाहर से साफ करने के लिए सूखे कपड़े का उपयोग करें (बेंजीन, थिनर, या एल्कोहल जैसे विलायकों का उपयोग न करें)।
- फोन को मुलायम फर्नीचर पर चार्ज न करें।
- फोन अच्छे हवादार क्षेत्र में चार्ज किया जाना चाहिए।
- इस यूनिट को अत्यधिक धुएँ या धूल में न रखें।
- फोन को क्रेडिट कार्ड्स या ट्रांसपोर्ट टिकट्स के पास न रखें यह चुंबकीय पट्टियों पर अंकित जानकारी को प्रभावित कर सकता है।

- स्क्रीन को नुक़ीली वस्तु से न ठकठकाएँ, क्य़ोंकि इससे फ़ोन को नुक़सान हो सकता है.
- फ़ोन को तरल पदार्थ या नमी में न रखें.
- सहायक उपकरण जैसे ईयरफ़ोन का सावधानीपूर्वक उपयोग करें. एंटीना को अनावश्यक रूप से न छुएँ.

## प्रभावी ढंग से फ़ोन का उपयोग

### इलेक्ट्रॉनिक और मेडिकल डिवाइसेस

सभी मोबाइल फ़ोन में रुकावट आ सकती है, जो कार्यक्षमता को प्रभावित कर सकती है.

- बिना अनुमति के अपने मोबाइल फ़ोन का उपयोग मेडिकल उपकरण के पास न करें. आपके फ़ोन की कार्रवाई आपके मेडिकल डिवाइस के साथ हस्तक्षेप कर सकती है या नहीं, यह निर्धारित करने के लिए कृपया अपने डॉक्टर से संपर्क करें.
- मोबाइल फ़ोन द्वारा कुछ श्रवण सुविधाएँ बाधित हो सकती हैं.
- छोटा-सा व्यवधान भी टीवी, रेडियो, पीसी इत्यादि को प्रभावित कर सकता है.

## पेसमेकर

पेसमेकर के निर्माता अनुशंसा करते हैं कि पेसमेकर के साथ संभावित हस्तक्षेप से बचने के लिए एक मोबाइल फ़ोन और और एक पेसमेकर के बीच न्यूनतम 15सेमी के विभाजन को अवश्य संचालित करना चाहिए. इसे प्राप्त करने के लिए इस फ़ोन को अपने पेसमेकर के विपरीत कान पर उपयोग करें और इसे वक्ष के पॉकेट पर नहीं रखें

## अस्पताल

अस्पताल, क्लिनिक या स्वास्थ्य केंद्र सुविधाओं में जब कहा जाए तो अपने वायरलेस डिवाइस को सविच ऑफ कर दें. ये अनुरोध संवेदनशील मेडिकल उपकरणों के संभावित हस्तक्षेपों को रोकने के लिए बनाए गए हैं.

# सुरक्षित और सक्षम उपयोग के लिए निर्देश

## सड़क सुरक्षा

जिन क्षेत्रों में आप वाहन चलाते हैं, वहाँ मोबाइल फोन के उपयोग से संबंधित कानूनों और नियमों की जानकारी ले लें।

- वाहन चलाते समय हैंड-हेल्ड फोन का उपयोग न करें।
- वाहन चलाने पर पूरा ध्यान दें।
- यदि उपलब्ध हो, तो हैंड्स-फ्री किट का उपयोग करें।
- यदि वाहन चलाते समय आवश्यक हो, तो कॉल करने या उत्तर देने से पहले वाहन को सड़क के किनारे लगाएँ।
- RF ऊर्जा आपके वाहन के कुछ इलेक्ट्रॉनिक सिस्टम्स जैसे कार स्टीरियो और सुरक्षा उपकरण को प्रभावित कर सकती है।
- जब आपके वाहन में एयर बैग की सुविधा हो, तो लगे हुए या पोर्टेबल वायरलेस उपकरण से व्यवधान न डालें। इससे एयर बैग विफल हो सकता है या अनुपयुक्त कार्य के चलते गंभीर चोट पहुँचा सकता है।

- यदि आप यात्रा के समय संगीत सुन रहे हैं, तो कृपया सुनिश्चित करें कि वॉल्यूम उचित स्तर पर रहे, जिससे आप अपने चारों ओर के वातावरण के प्रति सचेत रहें। यह तब विशेष रूप से जरूरी है, जब आप रास्ते में हों।

## अपने सुनने की क्षमता को नुकसान न पहुँचाएँ

यदि आप लंबे समय तक तेज ध्वनि सुनते हैं तो आपकी सुनने की क्षमता को क्षति पहुँच सकती है। इसलिए हम सलाह देते हैं कि आप अपना हैंडसेट कान के पास चालू या बंद न करें। हम इसकी भी सलाह देते हैं कि संगीत और कॉल वॉल्यूम उचित स्तर पर सेट हों।

## ग्लास भाग

आपके मोबाइल डिवाइस के कुछ भाग कांच के बने हैं। यदि आपका मोबाइल डिवाइस किसी सख्त सतह पर गिर जाता है या उसे कोई शक्तिशाली धक्का लगता है, तो यह कांच टूट सकता है। यदि ग्लास टूटता है तो स्पर्श नहीं करें या निकालने का प्रयास नहीं करें। अपने मोबाइल डिवाइस का उपयोग तब तक रोकें जब तक ग्लास अधिकृत सेवा प्रदाता द्वारा बदल नहीं दिया जाता।

## विस्फोटक क्षेत्र

फोन का उपयोग ऐसे स्थान पर न करें जहाँ विस्फोट हो रहे हों। प्रतिबंधों पर ध्यान दें, और नियम या शर्तों का पालन करें।

## संभावित रूप से विस्फोट वाले वातावरण

- फोन का उपयोग ईंधन भरने के स्थान पर न करें।
- ईंधन या रसायनों के पास उपयोग न करें।
- मोबाइल फोन और सहायक उपकरणों को ज्वलनशील गैस, तरल या विस्फोटकों के साथ अपने वाहन में न ले जाएँ या न ही रखें।

## एयरक्रॉफ्ट में

वायरलेस डिवाइस से एयरक्रॉफ्ट में बाधा उत्पन्न हो सकती है।

- किसी भी एयरक्रॉफ्ट में चढ़ते समय अपना मोबाइल फोन बंद कर दें।
- क्रू की अनुमति के बिना विमानतल पर इसका उपयोग न करें।

## बच्चे

फोन को छोटे बच्चों की पहुँच से दूर किसी सुरक्षित स्थान पर रखें। इसमें छोटे-छोटे भाग होते हैं जो यदि अलग हो जाएँ तो गले में फँस सकते हैं।

## आपातकालीन कॉल्स

संभव है कि आपातकालीन कॉल्स सभी मोबाइल नेटवर्क्स के तहत उपलब्ध न हों। इसलिए, आपको आपातकालीन कॉल्स के लिए केवल फोन पर ही निर्भर नहीं रहना चाहिए। अपने स्थानीय सेवा प्रदाता से इसकी जानकारी लें।

## बैटरी जानकारी और देखभाल

- बैटरी रिचार्ज करने के पहले आपको उसे पूरी तरह डिस्चार्ज करने की आवश्यकता नहीं है। अन्य बैटरी सिस्टम्स के विपरीत, ऐसा कोई स्मृति प्रभाव नहीं है जिससे बैटरी के प्रदर्शन पर असर पड़ता है।
- केवल LG बैटरियों और चार्जर्स का उपयोग करें। LG के चार्जर्स बैटरी का जीवन बढ़ाने के लिए होते हैं।
- बैटरी पैक को अलग-अलग न करें या उसे शॉर्ट-सर्किट से बचाएँ।

## सुरक्षित और सक्षम उपयोग के लिए निर्देश

- बैटरी पैक के धातु वाले हिस्सों को साफ रखें.
- बैटरी का प्रदर्शन अपेक्षानुसार न रहने पर उसे बदल दें. बैटरी पैक को सैकड़ों बार रीचार्ज किया जा सकता है, जब तक कि उसे बदलने की आवश्यकता न हो.
- यदि बैटरी को लंबे समय से उपयोग नहीं किया गया है तो उसकी क्षमता बढ़ाने के लिए उसे रीचार्ज करें.
- बैटरी चार्जर को सीधे धूप में न रखें या बाथरूम जैसी अधिक नमी वाली जगहों पर इसका उपयोग न करें.
- बैटरी को गर्म या ठंडे स्थानों पर न रखें, इससे बैटरी के प्रदर्शन पर बुरा असर हो सकता है.
- यदि बैटरी को किसी गलत प्रकार की बैटरी से बदला जाता है तो विस्फोट का खतरा होता है.
- उपयोग की गई बैटरीज का निपटान निर्माता के निर्देशों के अनुसार ही करें. जब भी संभव हो इसे रीसायकल करें. इसे घरेलू कचरे की तरह न फेंकें.
- यदि आप बैटरी बदलना चाहते हैं तो सहायता के लिए इसे नजदीक के अधिकृत LG इलेक्ट्रॉनिक्स सेवा केंद्र या डीलर के पास ले जाएँ.
- फोन पूरी तरह चार्ज हो जाने पर चार्जर को वॉल सॉकेट से निकाल दें ताकि चार्जर की अनावश्यक ऊर्जा खपत को बचाया जा सके.
- वास्तविक बैटरी जीवन नेटवर्क कॉन्फिगरेशन, उत्पाद सेटिंग्स, उपयोग पद्धति, बैटरी और वातावरण की परिस्थितियों पर निर्भर करेगा.

# अपने फोन को जानें



**मुख्य स्क्रीन**

**ठीक कुंजी**

**बाएँ सॉफ्ट कुंजी**

सीधे मेरे स्टाफ में जाता है.

**एकाधिक-कार्य कुंजी**

**कॉल कुंजी**

इससे फोन नंबर डायल किए जाते हैं और आवाक कॉल के उत्तर दिए जाते हैं.

**प्रोग्रामेबल हॉट कुंजी**

आप पसंदीदा मेनू को हॉट कुंजी के रूप में पंजीकृत कर सकते हैं.

**नेविगेशन कुंजियाँ**

• **मेनू म:** मेनूज के बीच नेविगेट करता है.

**दाईं सॉफ्ट कुंजी**

सीधे संपर्कों पर जाता है/पिछली स्क्रीन पर वापस जाता है.


**कुंजी साफ करें**

हर बार दबाने पर एक वर्ण हटाती है.

**समाप्त/ध्वंसा कुंजी**

कॉल समाप्त या अस्वीकार करती है. फोन चालू/बंद करती है. जब आप मेनू का उपयोग करते हैं, तो होम स्क्रीन पर वापस आता है.

# खोलें दृश्य

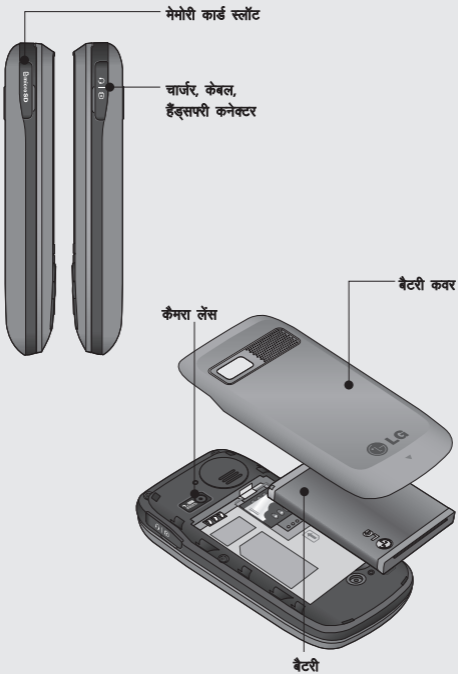




# USIM और बैटरी स्थापित करना

## 1 बैटरी कवर निकालना

बैटरी कवर निकालने वाला लैच दबाएँ.  
बैटरी कवर आसानी से स्लाइड होना  
और बाहर निकलना चाहिए.



## 2 बैटरी निकालना

बैटरी की निचली सतह उठाएँ और  
उसे सावधानी से बैटरी कंपार्टमेंट से  
निकालें.




**⚠ चेतावनी:** जब फोन चालू हो तो बैटरी न निकालें, क्योंकि यह फोन को क्षति पहुँचा सकता है.

## 3 चिप कार्ड स्थापित करें

USIM कार्ड को USIM कार्ड होल्डर में स्लाइड करें. ध्यान रखें कि कार्ड का सुनहरा हिस्सा नीचे की ओर रहे. USIM कार्ड को निकालने के लिए इसे शीर्ष से होल्डर से बाहर की ओर दबाएँ.

**⚠ चेतावनी:** जब स्लाइड खुला हो तो USIM कार्ड न डालें, चूंकि ऐसा करने से आपके फोन या USIM कार्ड को नुकसान हो सकता है.

# USIM और बैटरी स्थापित करना



## 4 बैटरी लगाना

बैटरी के ऊपरी सिरे को पहले बैटरी कंपार्टमेंट के ऊपरी भाग में डालें। सुनिश्चित करें कि बैटरी के संपर्क फोन के टर्मिनलों के सामने हैं। बैटरी के ऊपरी भाग को दबाएँ जब तक कि वह क्लिक की आवाज के साथ अपनी जगह पर न बैठ जाए।



## 5 बैटरी कवर लगाना

बैटरी कवर के पीछे की ओर को डालें और स्लाइड को नीचे की ओर तब तक दबाएँ, जब तक यह सही स्थान पर बैठ न जाए.




## 6 अपना फोन चार्ज करना

आपके GU285 के किनारे से चार्जर सॉकेट के कवर को खोलने के लिए खींचें. चार्जर डालें और मेन इलेक्ट्रिसिटी सॉकेट में प्लग करें. आपके GU285 को तब तक चार्ज करने की आवश्यकता होगी, जब तक कि स्क्रीन पर पूरी तरह चार्ज का संदेश प्रकट नहीं हो जाता.



**चेतावनी:** फोन को मुलायम फर्नीचर पर चार्ज न करें. फोन अच्छे हवादार क्षेत्र में चार्ज किया जाना चाहिए.



# स्मृति कार्ड

## स्मृति कार्ड स्थापित करना

आप एक स्मृति कार्ड का उपयोग करके अपने फोन पर उपलब्ध स्मृति स्थान बढ़ा सकते हैं।

**नोट:** स्मृति कार्ड एक अतिरिक्त एक्सेसरी है।

स्मृति कार्ड कवर खोलें। स्मृति कार्ड को तब तक स्लॉट में स्लाइड करें, जब तक यहाँ सही स्थान पर क्लिक न करे। ध्यान रखें कि कार्ड का सुनहरा हिस्सा नीचे की ओर रहे।




## स्मृति कार्ड निकालना

कवर खोलें और सावधानीपूर्वक फोन में धीरे से दबाते हुए और फिर तुरंत इसे बाहर करते हुए स्मृति कार्ड निकालें, जैसा कि निम्न आकृति में दिखाया गया है:



## स्मृति कार्ड स्वरूपित करना

हो सकता है आपका स्मृति कार्ड पहले से स्वरूपित हो। यदि नहीं, तो इसका उपयोग करने से पहले आपको ऐसा करने की आवश्यकता होगी।

- 1 होम स्क्रीन से  दबाएँ और सेटिंग्स का चयन करें।
- 2 स्मृति जानकारी चुनें और बाह्य स्मृति का चयन करें।
- 3 स्वरूपित करें दबाएँ और पासवर्ड दर्ज करें, जो डिफॉल्ट रूप से 0000 पर सेट है। आपका कार्ड स्वरूपित और उपयोग के लिए तैयार हो जाएगा।










**चेतावनी:** जब आप अपने स्मृति कार्ड का स्वरूपण करते हैं तो सभी सामग्री मिट जाएगी। यदि आप अपने मेमोरी कार्ड का डेटा खोना नहीं चाहते हैं तो पहले उसका बैकअप ले लें।

# आपका होम स्क्रीन













## स्थिति पट्टी

सिग्नल शक्ति, नए संदेश और बैटरी जीवन के साथ साथ आपको यह बताने के लिए कि क्या आपका Bluetooth कनेक्शन सक्रिय है, स्थिति पट्टी विभिन्न चिह्नों का उपयोग करती है।

निम्न तालिका उन चिह्नों का वर्णन करती है जिन्हें आप स्थिति पट्टी में देख सकते हैं




चिह्न	वर्णन
	नेटवर्क सिग्नल क्षमता (पट्टियों की संख्या में अंतर होगा)
	कोई नेटवर्क सिग्नल नहीं
	GPRS उपलब्ध
	3G उपलब्ध
	EDGE उपलब्ध
	फ्लाइंग मोड सक्रिय है
	कॉलर्स डाइवर्ट किए गए हैं
	रोमिंग सेव
	WAP सेवा कनेक्टेड है

**TIP!** आप अपनी पसंदीदा सूची का उपयोग करके चुने गए मेनू पर त्वरित पहुँच प्राप्त कर सकते हैं. स्टैंडबाई मोड में प्रोग्रामेबल हॉट कुंजी दबाएँ. <रिक्त> चयन करें और तब पसंदीदा के रूप में मेनू को जोड़ने के लिए चयन करें.

चिह्न	वर्णन
	मल्टीटास्किंग उपलब्ध
	मेमोरी कार्ड स्थापित
	अलार्म सेट है
	शेड्यूल
	New message
	नया वॉयस संदेश
	उपयोग में सामान्य प्रोफाइल
	मौन प्रोफाइल उपयोग में है
	आउटडोर प्रोफाइल उपयोग में है
	हेडसेट प्रोफाइल उपयोग में है
	शेष बैटरी का जीवन
	बैटरी रिक्त


# कॉल्स

## कॉल करना


- 1 सुनिश्चित करें कि आपका फोन चालू है।
- 2 आप स्लाइड को खोलने के बाद कुंजीपैड का उपयोग कर सकते हैं। किसी अंक को हटाने के लिए  या पीछे तीर को दबाएँ।
- 3 कॉल प्रारंभ करने के लिए  दबाएँ।
- 4 कॉल समाप्त करने के लिए  दबाएँ या कवर को बंद करने के लिए स्लाइड करें।

**TIP!** कोई अंतर्राष्ट्रीय कॉल करते समय दर्ज करने के लिए, 0 दबाकर रखें।


## अपने संपर्कों से कॉल करना

- 1 मेनू में संपर्क का चयन करें और फिर खोजें।
- 2 कुंजीपैड का उपयोग करते हुए उस संपर्क का पहला अक्षर टाइप करें जिसे आप कॉल करना चाहते हैं और फिर संपर्क पर स्क्रॉल करें।
- 3 कॉल प्रारंभ करने के लिए  दबाएँ।

## कॉल का उत्तर देना और निरस्त करना


जब आपके फोन की घंटी बजती है तो कॉल का उत्तर देने के लिए स्वीकार या  दबाएँ।

जब आपके फोन की घंटी बज रही हो तो आप घंटी को म्यूट करने के लिए मौन दबा सकते हैं। यदि किसी मीटिंग के लिए अपने प्रोफाइल को मौन पर सेट करना भूल गए हों, तो यह उपयोगी होता है।


किसी इनकमिंग कॉल को निरस्त करने के लिए  दबाएँ या निरस्त का चयन करें।

## स्पीड डायलिंग


आप ऐसे संपर्क को स्पीड डायल नंबर असाइन कर सकते हैं, जिसे आप बार-बार कॉल करते हैं।

- 1 मुख्य मेनू खोलने के लिए  दबाएँ। संपर्कों का चयन करें, फिर स्पीड डायल का चयन करें।
- 2 आपका ध्वनि मेल स्पीड डायल 1 के लिए पहले से सेट है और आप इसे परिवर्तित नहीं कर सकते। या तो नेविगेशन कुंजी का उपयोग कर सेट का चयन करते हुए या हार्ड कुंजी संख्या दबाते हुए किसी अन्य संख्या का चयन करें।

**3** आपकी पता पुस्तिका खुल जाएगी. उस सदस्य को आप जो संख्या असाइन करना चाहते हैं उसका चयन नेविगेशन कुंजी का उपयोग करते हुए करें और फिर ठीक का चयन करें.

स्पीड डायल नंबर पर कॉल करने के लिए, स्क्रीन पर संपर्क प्रकट होने तक असाइन किया गया नंबर दबाए रखें. कॉल स्वचालित रूप से प्रारंभ हो जाएगी और  को दबाने की आवश्यकता नहीं होगी.

### अपना कॉल लॉग्स देखना

 दबाएँ और कॉल्स का चयन करें.

**सभी कॉल्स** - अपने सभी डायल किए गए, प्राप्त या छूटे हुए कॉल्स की संपूर्ण सूची देखें.

**छूटी कॉल्स** - छूटी कॉल्स की सूची देखें.

**डायल किए गए कॉल्स** - उन सभी नंबरों की सूची देखें, जिनपर आपने कॉल किया है.

**प्राप्त कॉल्स** - उन सभी नंबरों की सूची देखें, जिनसे आपको कॉल किया गया है.

**कॉल अवधि** - वर्णन देखें, कि अपनी कॉल्सय पिछली, डायल की गई, प्राप्त और सभी पर कितना समय व्यतीत किया है.

**कॉल मूल्य** - आपकी पिछली कॉल या सभी कॉल्स पर लागू शुल्क देखें. यह सेवा नेटवर्क निर्भर है, कुछ ऑपरेटर इसका समर्थन करने में असमर्थ हैं.

**डेटा वॉल्यूम** - अपने सभी प्राप्त और भेजे गए डेटा की मात्रा किलो बाइट्स में देखें.

**TIP!** किसी भी कॉल लॉग से विकल्प का चयन करें और फिर चयनित आइटम्स को हटाने के लिए हटाएँ का चयन करें.

**TIP!** कॉल की दिनांक और समय देखने के लिए किसी भी एकल कॉल प्रविष्टि को हाइलाइट करने के लिए नेविगेशन कुंजी का उपयोग करें. सभी कॉल अवधि देखने के लिए देखें चुनें.

# कॉल्स

## कॉल डाइवर्ट का उपयोग करना

- 1 ● दबाएँ , सेटिंग्स का चयन करें.
- 2 कॉल का चयन करें— कॉल डाइवर्ट. या फिर आप सभी निष्क्रिय करें चुन सकते हैं.
- 3 जब लाइन व्यस्त हो, जब कोई उत्तर न मिले, जब आप पहुँच से बाहर हों, तब चुनें कि क्या सभी कॉल्स को डाइवर्ट करना है.
- 4 सक्रिय करें और डाइवर्ट किया जाने वाला इनपुट नंबर चुनें.
- 5 अपना डाइवर्ट नंबर दर्ज करें या अपने डाइवर्ट नंबर के लिए संपर्क ब्राउज करने के लिए खोजें चयनित करें.

**नोट:** कॉलें अंतरित करने के लिए शुल्क लिया जाएगा. कृपया विवरण के लिए अपने नेटवर्क प्रदाता से संपर्क करें.

**TIP!** सभी कॉल डाइवर्ट बंद करने के लिए, कॉल डाइवर्ट मेनू से सभी निष्क्रिय करें चुनें.

## कॉल अवरोधन का उपयोग करें

- 1 ● दबाएँ, सेटिंग्स का चयन करें.
- 2 कॉल का चयन करें— कॉल अवरोधित करना.
- 3 किसी एक या सभी पांच विकल्प चुनें:  
**आउटगोइंग कॉल्स**  
**अंतर्राष्ट्रीय कॉल्स**  
**घरेलू देश छोड़कर अंतर्राष्ट्रीय कॉल्स**  
**इनकमिंग कॉल्स**  
**जब विदेश में हों, तो इनकमिंग कॉल्स**
- 4 सक्रिय करें चयनित करें और कॉल अवरोधन पासवर्ड दर्ज करें. कृपया इस सेवा के लिए अपने नेटवर्क ऑपरेटर के साथ जाँच करें.

**TIP!** सेटिंग्स – कॉल मेनू से फिक्स्ड डायल नंबर का चयन करें और उन नंबरों की सूची को इकट्ठा करें, जिन्हें आपके फोन से कॉल किया जा सकता है. आपको अपने ऑपरेटर से PIN2 कोड की आवश्यकता होगी. सक्रिय होने पर, केवल फिक्स्ड डायल सूची के नंबरों को ही आपके फोन से कॉल किया जा सकता है.



## कॉल सेटिंग्स परिवर्तित करना

- 1 ● दबाएँ, सेटिंग्स का चयन करें—कॉल करें.
- 2 यहाँ से आप इसके लिए सेटिंग्स में सुधार कर सकते हैं:

**कॉल डाइवर्ट** - चुनें कि आपके कॉलस कहाँ डाइवर्ट किए जाने हैं.

**कॉल रोधन** - उन कॉलों को चुनें जिनका आप रोकना चाहते हैं.

**कॉल प्रतीक्षा** - कोई कॉल प्रतीक्षा में होने पर सचेत रहें.

**फिक्स्ड डायल नंबर** - उन नंबर की सूची चुनें, जिसे आपके फोन से कॉल किया जा सके.

**क्षमा संदेश** - आप किसी कॉल को निरस्त करें, इससे पहले पूर्वनिर्धारित सूचना संदेश सहेजें.

**सामान्य सेटिंग्स** - विस्तार से दी गई निम्न सामग्रियों का संदर्भ लें.

## सामान्य सेटिंग्स

**उत्तर मोड** - आपको उत्तर मोड को सेट करने की अनुमति देता है. आप भेजें कुंजी दबाएँ, ऊपर स्लाइड करें और कोई भी कुंजी दबाएँ के बीच चुन सकते हैं.

### मेरा नंबर भेजें

**नेटवर्क द्वारा सेट करें** - सेवा प्रदाता द्वारा निर्धारित डिफॉल्ट सेटिंग्स के साथ कॉन्फिगर करता है.

**चालू** - आउटगोइंग कॉल करते समय आपका नंबर भेजा जाएगा.

**बंद** - आउटगोइंग कॉल करते समय आपका नंबर रोक कर रखा जाएगा.

**मिनट माइंडर** - यह निर्धारित करता है, कि जब आप फोन पर हों, तो क्या प्रत्येक 1 मिनट के बाद एक टोन बजाई जाए.

**स्वतरु रीडायल** - जब कोई कॉल करने का प्रयास विफल हो जाए, तो आपको स्वतः रीडायल फंक्शन को सेट करने की अनुमति देता है.


**DTMF भेज** - DTMF आपको स्वचालित किए गए संदेशों के अंतर्गत नेविगेट करने के लिए सांख्यिक आदेशों के उपयोग की अनुमति देता है.

# कॉल्स

**नया नंबर सहेजें** - इस विकल्प का चयन उन नंबरस को कॉल समाप्त होने पर सहेजता है, जो पहले से आपके संपर्क में नहीं हो.

## BT उत्तर मोड

**हैंड्स-फ्री** - आप Bluetooth हेडसेट का उपयोग करते हुए किसी कॉल का उत्तर दे सकते हैं.


**हैंडसेट** - हेडसेट का उपयोग करते समय कॉल का उत्तर देने के लिए हैंडसेट पर  दबाएँ.

**हैंग अप मोड** - सेट करें, कि स्लाइड को बंद करने पर कॉल समाप्त होना है या नहीं.

**कॉल निरस्त** - आप सेट कर सकते हैं, कि क्या इनकमिंग कॉल्स को निरस्त करना है.

# संपर्क

## कोई संपर्क खोजना

- 1 मुख्य मेनू से संपर्क का चयन करें और  चुनें.
- 2 कुंजीपैड का उपयोग करते हुए उस संपर्क के नाम का पहला अक्षर टाइप करें जिसे आप कॉल करना चाहते हैं.
- 3 संपर्कों और उनके विभिन्न नंबरों के अंतर्गत स्क्रॉल करने के लिए नेविगेशन कुंजियों का उपयोग करें.

## नया संपर्क जोड़ना

- 1 संपर्क का चयन करें और बाईं सॉफ्ट कुंजी विकल्प दबाएँ.
- 2 नया संपर्क बनाएँ का चयन करें.
- 3 चुनें कि आपके संपर्क को हैंडसेट पर संग्रह करना है या USIM कार्ड पर.
- 4 प्रदान किए गए फ़िल्ड्स में इच्छित जानकारी दर्ज करें और पूर्ण का चयन करें.

या फिर थोड़ी त्वरित विधि का उपयोग करने के लिए:


- 1 इच्छित संख्या दर्ज करें और विकल्प दबाएँ.
- 2 नंबर सहेजें चुनें और या तो नया संपर्क या संपर्क अद्यतन करें चुनें.
- 3 प्रासंगिक जानकारी दर्ज करें और पूर्ण का चयन करें.

## किसी समूह में संपर्क जोड़ना

आप अपने संपर्कों को समूहों में सहेज सकते हैं. उदाहरण के लिए, यह आपके कार्य सहकर्मियों और परिवार को अलग रखने के लिए उपयोगी है. कई समूह पहले से ही आपके फोन पर सेट अप किए गए हैं, जिनमें शामिल हैं परिवार, मित्र, सहकर्मी, स्कूल और महत्वपूर्ण व्यक्ति.

- 1 संपर्क चुनें और समूहों का चयन करें.
- 2 आप जिस समूह में संपर्क को जोड़ना चाहते हैं, उसपर स्क्रॉल करें और देखें का चयन करें और फिर चयन करें.

## संपर्क

- 3 आपकी संपर्क सूची खुल जाएगी। ऐसा कोई भी संपर्क स्क्रॉल करें जिसे आप समूह में जोड़ना चाहेंगे और , दबाएँ, फिर पूर्ण चयनित करें।

**TIP!** आप किसी समूह को रिंगटोन असाइन कर सकते हैं। आप उस समूह का चयन करें, जिसे रिंगटोन असाइन करना चाहते हैं, विकल्प और संपादन करें समूह – समूह रिंगटोन का चयन करें

**नोट:** आप एक समूह में केवल वह संपर्क असाइन या एक संपर्क में वह चित्र जोड़ सकते हैं जो आपकी फोन (प्ल नहीं) स्मृति में सहेजा गया है।

### किसी संपर्क में चित्र जोड़ना

कोई चित्र शामिल करके आप अपनी पता पुस्तिका में अपने संपर्कों का प्रकटन बदल सकते हैं।

- 1 संपर्क का चयन करें और नया संपर्क बनाएँ चुनें।
- 2 किसी छवि को संपादित और सम्मिलित करने के लिए छवि स्वचैय्यर का चयन करें।
- 3 परिवर्तित करें चुनें।

- 4 कोई छवि नहीं, छवियों पर जाएँ चुनें, और एक चित्र लें। यदि आप छवियों पर जाएँ का चयन करते हैं, तो आप ऐसी छवि को चुन सकते हैं, जो आपकी फोन स्मृति में सहेजी गई हो। यदि आप एक चित्र लें का चयन करते हैं, तो आपके कैमरे का व्यू फाइंडर खुल जाएगा, ताकि आप अपने संपर्क का चित्र ले सकें। चित्र लें और फिर सम्मिलित करें दबाएँ।

- 5 पूर्ण का चयन करें।


### अपने USIM / हैंडसेट पर संपर्कों की प्रतिलिपि बनाना

आप अपने संपर्क को अपने आपके USIM से अपने हैंडसेट पर या आपके हैंडसेट से आपके USIM पर प्रतिलिपि बनाना भी चुन सकते हैं।


- 1 संपर्क का चयन करें, विकल्प – संग्रह स्थान चुनें।
- 2 USIM / हैंडसेट पर प्रतिलिपि बनाएँ मेनू या USIM / हैंडसेट पर ले जाएँ का चयन करें।
- 3 यदि आप सुनिश्चित हैं तो पूर्ण का चयन करें।

# संदेश भेजना

## संदेश भेजना

आपके GU285 में SMS (Short Message Service), MMS (Multimedia Message Service) और ईमेल के साथ साथ नेटवर्क के सेवा संदेशों से संबंधित फंक्शंस होते हैं। इन फंक्शंस का उपयोग करने के लिए  दबाएँ और फिर संदेश का चयन करें।

## संदेश भेजना

- 1 नया संदेश बनाने के लिए , दबाएँ, संदेश का चयन करें और नया संदेश बनाएँ का चयन करें।
- 2 SMS या MMS भेजने के लिए संदेश चुनें।
- 3 एक नया संदेश संपादक खुल जाएगा। संदेश संपादक में SMS और MMS एक सहज मोड में संयोजित होते हैं, जिनके बीच स्विच करना आसान होता है। संदेश संपादक की डिफॉल्ट सेटिंग SMS मोड है।
- 4 कुंजीपैड का उपयोग करते हुए अपना संदेश दर्ज करें। पाठ कैसे दर्ज करें पर अधिक जानकारी के लिए दाहिनी ओर पाठ दर्ज करना देखें।

- 5 छवि, विडियो, ध्वनि, प्रतीकों, टेम्पलेट, इमोटिकॉन, नाम और नंबर, नई स्लाइड, विषय या अधिक को जोड़ने के लिए विकल्प का चयन करें और सम्मिलित करें चुनें।
- 6 संपर्कों की सूची से संपर्क चुनें या अधिक से फोन नंबर चुनें।
- 7 भेजें का चयन करें।



**चेतावनी:** यदि कोई छवि, ध्वनि, वीडियो, नई स्लाइड या विषय संदेश संपादक में जोड़ा जाता है, तो वह अपने आपा MMS मोड में कनवर्ट हो जाएगा और उसके अनुसार आपको शुल्क देना होगा।

# संदेश भेजना

## पाठ लिखना

आप फोन के कुंजीपैड का उपयोग करते हुए अल्फान्यूमेरिक वर्ण लिख सकते हैं। उदाहरण के लिए संपर्कों में नाम संग्रहीत करना, संदेश लिखना और कैलेंडर में इवेंट शेड्यूल बनाना सभी के लिए पाठ लिखना आवश्यक है। फोन में निम्न पाठ इनपुट मोड उपलब्ध हैं: T9 मोड, Abc मोड, और 123 मोड।


**नोट:** कुछ फील्ड में केवल एक पाठ इनपुट पद्धति की ही अनुमति होती है (जैसे कि पता पुस्तिका फील्ड में टेलीफोन नंबर)।

## कुंजीपैड का उपयोग करते हुए पाठ इनपुट मोड

जब आप पाठ दर्ज करना चाहते हैं, उदाहरण के लिए, संदेश लिखते समय, तो कुंजीपैड T9 मोड पर डिफॉल्ट होगा। यदि आप कोई नंबर दर्ज कर रहे हैं, उदाहरण 1 के लिए कोई कॉल करते समय तो कुंजीपैड नंबर कुंजियाँ नंबर मोड पर डिफॉल्ट होंगी।


## अपनी ईमेल सेट करना

आप गतिशील रहते हुए भी GU285 पर ईमेल का उपयोग करते हुए संपर्क में रह सकते हैं। POP3 या IMAP4 ईमेल खाते को सेट अप करना त्वरित और सहज है।

- 1  दबाएँ, संदेश का चयन करें और सेटिंग्स चुनें।
- 2 ई-मेल का चयन करें और ई-मेल खाते चुनें।
- 3 जोड़ें का चयन करें और पॉप अप निर्देशों का पालन करें और आवश्यक जानकारी दर्ज करें।

## अपने नए खाते का उपयोग करते हुए ईमेल भेजना

किसी ईमेल को भेजने/प्राप्त करने के लिए आपको एक ईमेल खाता सेट अप करना चाहिए (ऊपर देखें)।

- 1  दबाएँ, संदेश का चयन करें और नया संदेश बनाएँ चुनें।
- 2 ई-मेल चुनें और एक नई ईमेल विंडो खुल जाएगी।
- 3 कोई विषय पंक्ति लिखें और फिर ठीक दबाएँ।
- 4 कुंजीपैड का उपयोग करते हुए अपना संदेश दर्ज करें।

**मेलबॉक्स** - इसमें आपके सभी ईमेल संदेश शामिल होते हैं। आप जिस खाते का उपयोग करना चाहते हैं उसका चयन करें और फिर पुनर्प्राप्त करें का चयन करें। आपका GU285 आपके ईमेल खाते से कनेक्ट हो जाएगा और आपके नए संदेशों को पुनर्प्राप्त करेगा।

## संदेश फोल्डर्स

● दबाएँ और फिर संदेश का चयन करें। आपके GU285 पर उपयोग की गई फोल्डर संरचना स्व-विवरणात्मक होनी चाहिए।

**नया संदेश बनाएँ** - अपना नया संदेश बनाएँ।

**इनबॉक्स** - आपके द्वारा प्राप्त सभी संदेश इनबॉक्स में स्थित होते हैं। यहाँ से आप उत्तर दे सकते हैं, अग्रेषित कर सकते हैं और भी अधिक कर सकते हैं। आपके संदेशों को प्रबंधित करना देखें।

**मेलबॉक्स** - आपके द्वारा प्राप्त किए गए सभी मेल आपके मेलबॉक्स में रखे जाते हैं।

**ड्राफ्ट्स** - यदि किसी संदेश को लिखना समाप्त करने के लिए आपके पास समय नहीं है, तो आप यहाँ आपने उस समय तक जितना भी लिखा है, उसे सहेज सकते हैं।

**आउटबॉक्स** - यह एक अस्थायी संग्रह फोल्डर है, जिसे संदेश भेजते समय और जो संदेश भेजने में विफल हो गए हों, उनके लिए उपयोग किया जाता है।

**भेजे गए आइटम्स** - आपके द्वारा भेजे गए सभी संदेशों की प्रतिलिपियाँ आपके भेजे गए फोल्डर में रखी जाती हैं।

**मेरे फोल्डर्स** - आप इनबॉक्स या भेजे गए संदेशों को मेरे फोल्डर्स में ले जा सकते हैं। साथ ही आप मेरे फोल्डर्स के उन संदेशों को मूल संदेश बॉक्स में भेज सकते हैं।

**टेम्पलेट्स** - पहले से लिखे गए उपयोगी संदेशों की सूची, जिसे आप संपादित कर सकते हैं, त्वरित उत्तर के लिए उपयोगी।

**इमोटिकॉन** - आप इमोटिकॉन को जोड़, संपादित या हटा सकते हैं। आप संदेश के लिए खने पर अपनी प्राथमिकता के अनुसार इमोटिकॉन सम्मिलित कर सकते हैं।

## अपने संदेशों को प्रबंधित करना

आप अपने संदेशों को प्रबंधित करने के लिए अपने इनबॉक्स का उपयोग कर सकते हैं।

- 1 ● दबाएँ, संदेश का चयन करें और सेटिंग्स चुनें।
- 2 विकल्प का चयन करें और चुन:

# संदेश भेजना

**उत्तर दें** - चयनित संदेश को उत्तर भेजें

**अग्रणी कर** - चयनित संदेश अन्य व्यक्ति को भेजें.

**कॉल कर** - उस व्यक्ति को कॉल करें, जिसने आपको संदेश भेजा है.

**नंबर सहेज** - संदेश का नंबर सहेजें.

**हटाएँ** - चयनित संदेश हटाएँ.

**नया संदेश बनाए** - नया संदेश, ईमेल लिखें. इस बात पर ध्यान दिए बिना, कि किसने संदेश भेजा है.

**एकाधिक चयन** - एक संदेश या सभी चिह्नित करें.

**प्रतिलिपि बनाएँ और ले जाए** - चयनित संदेश का SIM कार्ड या हैंडसेट पर प्रतिलिपि बनाना या ले जाना चुनें.

**फिल्टर** - वांछित संदेश प्रकारों के आधार पर संदेशों को प्रदर्शित करता है..


**संदेश जानकारी** - आप इसके प्रकार, विषय, ये कहाँ से है और इसके दिनांक की जाँच कर सकते हैं.

यदि आप यह संदेश देखते हैं SIM संदेश के लिए कोई स्थान नहीं, तो स्थान बनाने के लिए आपको अपने इनबॉक्स से कुछ संदेशों को हटा देना चाहिए.

यदि आप यह संदेश देखते हैं, संदेशों के लिए कोई स्थान नहीं, तो आप अधिक स्थान बनाने के लिए या तो संदेशों या सहेजी गई फाइल्स को हटा सकते हैं.

## टेम्पलेट्स उपयोग करना

आप उन पाठ और मल्टीमीडिया संदेशों के लिए टेम्पलेट्स बना सकते हैं, जो आप अक्सर भेजते हैं. आपके फोन पर पहले से कुछ टेम्पलेट्स होती हैं, जो अगर आप चाहें तो संपादित की जा सकती हैं.

- 1  दबाएँ, संदेश का चयन करें और टेम्पलेट्स चुनें.
- 2 पाठ टेम्पलेट्स या मल्टीमीडिया टेम्पलेट्स चुनें. पाठ टेम्पलेट मेनू में, फिर आप विकल्प का चयन कर सकते हैं और मौजूदा टेम्पलेट्स को परिवर्तित करने के लिए संपादित करें या नई टेम्पलेट जोड़ने के लिए नई टेम्पलेट बनाएँ चुन सकते हैं.
- 3 टेम्पलेट भेजने के लिए संदेश का चयन करें और नया संदेश बनाएँ चुनें. संदेश चुनें.
- 4 विकल्प चुनें और सम्मिलित करें चुनें, टेम्पलेट चुनें.



**5** आप जिस टेम्पलेट को भेजना चाहते हैं उसे चुनें और भेजे का चयन करें.

## **अपने पाठ संदेश सेटिंग्स परिवर्तित करना**

आपके GU285 की संदेश सेटिंग पूर्व परिभाषित होती हैं ताकि आप तुरंत संदेश भेज सकें.

यदि आप सेटिंग्स को परिवर्तित करना चाहें, तो आप यह सेटिंग्स विकल्प का उपयोग करते हुए कर सकते हैं.

● दबाएँ, संदेश का चयन करें, फिर सेटिंग्स और पाठ संदेश चुनें. आप निम्न में परिवर्तन कर सकते हैं:

**पाठ संदेश केंद्र** - अपने संदेश केंद्र के लिए जानकारी दर्ज करें.

**वितरण रिपोर्ट** - यह पुष्टिकरण प्राप्त करना चुनें, कि आपका संदेश वितरित किया गया.

**सत्यापन अवधि** - चुनें कि आपका संदेश कब तक संदेश केंद्र में संग्रह किया जाना है.

**संदेश प्रकार** - अपने पाठ को वॉइस, फैक्स, X.400 या ईमेल में कनवर्ट करें.

**वर्न एन्कोडिंग** - चुनें कि आपके वर्ण किस प्रकार एन्कोड किए जाने हैं. यहाँ आपके संदेश के आकार और इसलिए डेटा मूल्यों को प्रभावित करता है.

**लंबे पाठ इस रूप में भेजेँ** - चुनें कि क्या आपके द्वारा संदेश फील्ड में 2 पृष्ठों से अधिक लंबे पाठ को दर्ज किए जाने के बाद आपके संदेश को एकाधिक SMS या MMS के रूप में भेजा जाना है.

## **अपने मल्टीमीडिया संदेश सेटिंग्स परिवर्तित करना**

आपके GU285 का संदेश सेटिंग पूर्व परिभाषित है, इसलिए आप तुरंत संदेश भेज सकते हैं.

यदि आप सेटिंग्स को परिवर्तित करना चाहें, तो आप यह सेटिंग्स विकल्प का उपयोग करते हुए कर सकते हैं.

● दबाएँ, संदेश का चयन करें, फिर सेटिंग्स और मल्टीमीडिया संदेश चुनें. आप निम्न में परिवर्तन कर सकते हैं:

**पुनर्प्राप्ति मोड** - आप घर में हैं या रोमिंग पर हैं, इसके आधार पर स्वचालित या मैन्युअल रूप से मल्टीमीडिया संदेशों को डाउनलोड करने के लिए चुनें.

# संदेश भेजना

**वितरण रिपोर्ट** - वितरण रिपोर्ट के अनुरोध या अनुमति के लिए चुनें.

**पढ़ा गया उत्तर** - पढ़ा गया उत्तर के अनुरोध या अनुमति के लिए चुनें.

**प्राथमिकता** - अपनी मल्टीमीडिया संदेशों की प्राथमिकता का स्तर चुनें.

**सत्यापन अवधि** - चुनें कि आपका संदेश कब तक संदेश केंद्र में संग्रह किया जाना है.

**स्लाइड अवधि** - चुनें कि आपकी स्लाइड्स कितनी देर तक स्क्रीन पर प्रकट होंगी.


**बनाना मोड** - vkids MMS द्वारा समर्थित सामग्री प्रकारों के चयन की अनुमति देता है. (प्रतिबंधित, चेतावनी और मुफ्त)

**वितरण समय** - प्राप्तकर्ता को संदेश वितरित किए जाने के समय को कॉन्फिगर करता है. मल्टीमीडिया संदेश केंद्र वितरण समय के बाद संदेश वितरित करेगा

**MMS केंद्र** - किसी मल्टीमीडिया संदेश को भेजने के लिए आपको नेटवर्क जानकारी, जैसे MMSC या इंटरनेट प्रोफाइल को कॉन्फिगर करने की अनुमति देता है.

## अपनी ईमेल सेटिंग्स परिवर्तित करना

आप अपनी ईमेल सेटिंग्स अपनी स्वयं की प्राथमिकताओं के लिए धारण कर सकते हैं.

- 1  दबाएँ, संदेश का चयन करें और सेटिंग्स चुनें.
- 2 ई-मेल का चयन करें फिर आप निम्न सेटिंग्स को अपना सकते हैं:

**ई-मेल खात** - आप एक ईमेल खाता सेट अप कर सकते हैं.

**ई-मेल उत्तर की अनुमति द** - निर्धारित करता है, कि क्या पढ़ा गया पुष्टिकरण मेल अनुरोध के लिए पढ़ा गया पुष्टिकरण भेजा जाना है.

**उत्तर ई-मेल का अनुरोध** - निर्धारित करता है, कि क्या पढ़ा गया पुष्टिकरण के लिए अनुरोध भेजना है.

**अंतराल पुनर्प्राप्त कर** - चुनें कि आपका GU285 कितने अंतराल पर नए संदेशों के लिए जाँच करे.

**पुनर्प्राप्ति मात्रा** - चुनें कि चयनित समय में कितने ई-मेल पुनर्प्राप्त किए जाने हैं.

**अग्रोषित करें और उत्तर में संदेश**

**शामिल करें** - चुनें कि मूल संदेश को शामिल किया जाना है या नहीं.

**अनुलग्नक शामिल करें** - चुनें कि मूल अनुलग्नक को शामिल किया जाना है या नहीं.

**रोमिंग में स्वतः पुनर्प्राप्ति** -

चुनें कि आपके विदेश में रहने पर स्वचालित रूप से आपके संदेशों को पुनर्प्राप्त किया जाना है या नहीं.

**नया ई-मेल सूचना** - चुनें कि नए ईमेल के लिए चेतावनी दी जानी है या नहीं.

**हस्ताक्षर** - एक ईमेल हस्ताक्षर बनाएँ और इस सुविधा को चालू करें.

**प्राथमिकता** - अपनी ईमेल संदेशों की प्राथमिकता का स्तर चुनें.

**अपनी अन्य सेटिंग्स परिवर्तित करना**



**वॉइस मेल** - आप वॉइस मेल को संपादित कर सकते हैं.

**सेवा संदेश** - यहाँ आप सेवा संदेश को बंद कर सकते हैं, जिसका अर्थ है कि आपके संदेश प्राप्त होने पर सीधे आपके उपकरण में पुश नहीं किए जाएंगे, केवल तभी जब आप नए संदेशों के लिए जाँच करेंगे. आप अपनी सेवा संदेश सुरक्षा को भी परिवर्तित कर सकते हैं.

**जानकारी सेवा** - अपने संदेश के लिए कॉल प्रसारण, चौनल्स और भा 11 चुनें.


# कैमरा

## तुरंत फोटो लेना


- 1  दबाएँ और व्यूफाइंडर खोलने के लिए कैमरा का चयन करें.
- 2 फोन को पकड़ कर लेंस को फोटो के विषयवस्तु पर पॉइंट करें.
- 3 फोन इस तरह रखें कि आप अपने फोटो के सब्जेक्ट को देख सकें.
- 4 फोटो लेने के लिए  दबाएँ.

## आप अपना फोटो लेने से पहले

निम्न विकल्पों के लिए सेटिंग्स में पूर्वावलोकन दबाएँ. इनमें से कुछ सेटिंग्स वीडियो कैमरा सेटिंग्स पर भी दिखाई जाएँगी.


 **छवि आकार** - पृष्ठ 38 पर छवि आकार बदलना देखें.


**पूर्वावलोकन आकार** - पूर्वावलोकन छवि का चयन करेंरू पूर्ण छवि या पूर्ण स्क्रीन का चयन करें.


 **प्रभाव** - चार रंग टोन विकल्पों से चुनेंरू कोई नहीं (सामान्य रंग), सेपिया, श्वेत और श्याम या नकारात्मक.


## श्वेत संतुलन - श्वेत संतुलन

सुनिश्चित करता है कि आपके फोटो में कोई भी श्वेत यथार्थवादी है. अपने कैमरा को श्वेत संतुलन सही रूप से समायोजित करने के क्रम में आपको हल्की स्थितियों को निर्धारित करने की आवश्यकता हो सकती है. स्वतरू बहुत चमकदार, धूपदार, इनडोर या क्लाउडी से चुनें.

 **रात्रि मोड** - ऑन का चयन कर आप रात्रि में बेहतर चित्रों को ले सकते हैं.

 **टाइमर** - कैमरा प्रारंभ होने के पहले कैप्चर बटन दबाने के बाद टाइमर आपको विलंब सेट करने के लिए अनुमति देता है. कोई नहीं, 3 अनुभाग, 5 अनुभाग या 10 अनुभाग से चुनें. जब आप स्वयं को फोटो में शामिल करना चाहते हैं तब श्रेष्ठ है.

 **शॉट मोड** - सामान्य, बसट शॉट और फेम शॉट. से चुनें. बसट शॉट आपको स्वचालित रूप से अत्यंत तीव्र तीन, छह, नौ अनुवर्ती शॉट्स लेने देता है जो गतिशील ऑब्जेक्ट या स्पोर्टिंग ईवेंट्स के फोटो लेने के लिए श्रेष्ठ हैं

 **गुणवत्ता** - सर्वोत्कृष्ट, उत्कृष्ट और सामान्य के बीच से चुनें. गुणवत्ता जितनी बेहतर होगी, फोटो उतना ही शार्प होगा. इसके फलस्वरूप फाइल आकार बढ़ेगा जिसका अर्थ है कि आप अपनी मेमोरी में कुछ कम फोटो संग्रह कर पाएंगे.

निम्न विकल्पों के लिए सेटिंग्स में अन्य दबाए:

**मेमोरी** - वर्तमान स्थिति को जाँचेंरू हैंडसेट/बाहरी.

**चिह्नों को छुपाएँ** - चिह्न के प्रदर्शन को छुपाएँरू स्वतरू/मैन्युअल.

**ध्वनि** - चित्र लेते समय शटर ध्वनि का चयन करें.

## आपके द्वारा अपना फोटो लेने के बाद

कैप्चर किया गया फोटो स्क्रीन पर दिखाई देगा. छवि का नाम स्क्रीन के शीर्ष पर दिखाई देगा और आप स्क्रीन की बाईं ओर प्रदर्शित पाँच विकल्पों को देखेंगे.



**छवियाँ** - अपने एल्बम में अन्य फोटो पर इसे दिखने के लिए चुनें. आपकी वर्तमान फोटो सहेजी जाएगी.



**भेजें** - संदेश, ईमेल और Bluetooth. के रूप में फोटो को भेजने के लिए चयन करें. संदेश भेजना के लिए पृष्ठ 29 देखें.



**नया** - सीधे अन्य फोटो लेने के लिए इसका उपयोग करें. आपकी वर्तमान फोटो सहेजी जाएगी.



**के रूप में उपयोग कर** - वॉलपेपर, चित्र प्क, स्टार्ट अप या शट डाउन के रूप में अपनी छवि का उपयोग करने के लिए सब मेनू खोलने के लिए उपयोग करें.



**हटाएँ** - आपने जिस फोटो को अभी लिया है, उसे हटाता है. हाँ की पुष्टि कर इसका चयन करें. व्यूफाइंडर पुनः प्रकट होगा.


# कैमरा

## छवि आकार को परिवर्तित कर

आप मेमोरी स्थान बचाने के लिए फोटो के आकार को परिवर्तित कर सकते हैं। अधिक पिक्सेल का अर्थ फाइल आकार का बड़ा होना है, बदले में इसका अर्थ है कि वे आपकी मेमोरी का अधिक स्थान लेते हैं। यदि आप अपने फोन में अधिक चित्रों को फिट करना चाहते हैं तो आप फाइल आकार को छोटा बनाने के लिए पिक्सेल संख्या को बदल सकते हैं।

- 1 सेटिंग्स दबाएँ और उपकरण पट्टी से छवि आकार का चयन करें।
- 2 छह सांख्यिक विकल्पों से पिक्सेल मान का चयन करें
- 3 अपने परिवर्तनों को सहेजने के लिए ठीक दबाएँ।

## अपने सहेजे गए फोटोज देखना

- 1 आप कैमरा मोड में और होम स्क्रीन से भी सहेजे गए फोटो पर पहुँच प्राप्त कर सकते हैं। व्यूफाइंडर से मात्र एलबम दबाएँ। होम स्क्रीन से , दबाएँ तब मेरे स्टफ और छवियाँ का चयन करें।
- 2 आपकी गैलरी, डाउनलोड छवि और डिफॉल्ट छवियाँ स्क्रीन पर दिखाई देंगीं।

- 3 आप देखने के लिए इच्छित फोटो के चयन के लिए नेविगेशन कुंजी का उपयोग करें और इसे खोलने के लिए दृश्य का चयन करें।


## वॉलपेपर के रूप में फोटो का चयन करना

अपनी छवि गैलरी से, एक छवि के चयन के लिए नेविगेशन कुंजियों का उपयोग करें और वॉलपेपर, चित्र ID स्टार्ट —अप या शट डाउन, आवक कॉल या जावक कॉल के रूप में चयनित छवि के उपयोग के लिए विकल्प और के रूप में सेट को चुनें। जब आप फोटो को चित्र ID के रूप में सेट करते हैं तो आप फोटो के जिस भाग का उपयोग करना है उसको चुन सकते हैं।

**ध्यान दें:** चित्र ID केवल आपके फोन में सहेजे गए संपर्कों में ही जोड़े जा सकते हैं, आपकी सिम में सहेजे गए संपर्कों में नहीं।

# वीडियो कैमरा

## तुरंत वीडियो शूट करना

- 1  दबाएँ और कैमरा का चयन करें
- 2 वीडियो कैमरा चुनें.
- 3 कैमरा लेंस को वीडियो के सब्जेक्ट पर केंद्रित करें.
- 4 रिकॉर्डिंग प्रारंभ करने के लिए ठीक दबाएँ.
- 5 रिकॉर्डिंग व्यूफाइंडर के निचले दाएँ कोने पर प्रकट होगा और एक टाइमर आपके वीडियो की लंबाई को दिखाएगा.
- 6 वीडियो रोकने के लिए रोकें चुनें और फिर से प्रारंभ करें का चयन करके पुनरु प्रारंभ करें.
- 7 रिकॉर्डिंग रोकने के लिए बंद करें चुनें.

## आप अपना फोटो लेने से पहले

**वीडियोज** - अपने एल्बम में अन्य वीडियो क्लिप्स देखने के लिए चयन करें.

**कैमरा** - वीडियो कैमरा मोड से स्थिर कैमरा मोड में कनवर्ट करें.


**रिकॉर्डिंग** - वीडियो रिकॉर्डिंग प्रारंभ करें.


**जूम** - या  का  उपयोग कर जूम का उपयोग करें.


**चमक** - स्तर उंचा होने पर स्क्रीन अधिक चमकता है.


## आपके द्वारा आपका वीडियो शूट करने के बाद


वीडियो का नाम स्क्रीन के नीचे दिखाई देता है और पाँच विकल्प स्क्रीन के नीचे प्रदर्शित होते हैं

 **वीडियोज** - अपने एल्बम में अन्य वीडियो क्लिप्स देखने के लिए चयन कर आपका वर्तमान वीडियो क्लिप सहेजा जाएगा.

 **चलाएँ** - आपके द्वारा अभी रिकॉर्ड किया गया वीडियो चलाने के लिए चुनें.



 **नया** - सीधे अन्य वीडियो को शूट करने के लिए चयन कर. आपका वर्तमान वीडियो सहेजा जाएगा.

 **भेजें** - संदेश, ई-मेल या टटसनमजववजी. के रूप में वीडियो को भेजने के लिए चयन करें संदेश भेजना के लिए पृष्ठ 29 देखें.

 **हटाएँ** - वीडियो को हटाने के लिए आपको केवल रिकॉर्ड करना है और हाँ के चयन द्वारा पुष्टि करनी है. व्यूफाइंडर पुनः प्रकट होगा.

# वीडियो कैमरा

## अपने सहेजे गए वीडियोज देखना


- 1 अपने सहेजे गए वीडियोज को आप या तो वीडियो कैमरा मोड से या होम स्क्रीन से देख सकते हैं. केवल एल्बम का चयन करें. होम स्क्रीन से  दबाएँ तब मेरे स्टफ और छवियाँ का चयन करें.
- 2 स्क्रीन पर आपकी गैलरी प्रकट होगी.
- 3 आप वीडियो देखने के लिए इच्छित नेविगेशन कुंजी का उपयोग करें और इसे देखने के लिए  कुंजी दबाएँ.



# संगीत

## संगीत स्टोर

आपके LG GU285 में बिल्ट-इन डच प्लेयर है, इसलिए आप अपने सभी पसंदीदा संगीत को प्ले कर सकते हैं।

MP3 प्लेयर तक पहुँच के लिए  and दबाएँ और संगीत का चयन करें। यहाँ से आप इन तक पहुँच सकते ह:

**प्ले किए गए अंतिम गाने** - आप उन गानों को दोबारा प्ले कर सकते हैं, जिसे आपने हाल ही में सुना था।

**सभी गीत** - इसमें वे सभी गीत होते हैं जो आपके फोन पर हैं।

**मेरी प्लेलिस्ट** - इसमें आपके द्वारा बनाया गया प्लेलिस्ट शामिल होता है।

**कलाकार** - अपने संगीत संग्रह को कलाकार के आधार पर ब्राउज करें।

**एल्बम** - अपने संगीत संग्रह को एल्बम के आधार पर ब्राउज करें।

**शैली** - अपने संगीत संग्रह को शैली के आधार पर ब्राउज करें।

**ट्रैक्स को शफल कर** - आपके ट्रैक्स को रैंडम क्रम में प्ले करता है।

## अपने फोन पर संगीत स्थानांतरित करना

अपने फोन पर संगीत स्थानांतरित करने का सबसे आसान तरीका Bluetooth या अपनी सिंक केबल के माध्यम से हैं। Bluetooth का उपयोग करते हुए संगीत स्थानांतरित करने के लिए:

- 1 सुनिश्चित करें कि दोनों डिवाइसेस में Bluetooth चालू और एक दूसरे को दृश्यमान है।
- 2 अन्य डिवाइस पर संगीत फाइल चयनित करें और उस Bluetooth के माध्यम से भेजना चुनें।
- 3 जब फाइल भेजी गई है, तो आपको हॉ का चयन करते हुए इसे स्वीकार करना चाहिए।
- 4 फाइल को सभी गीतों में प्रकट होना चाहिए।

**नोट :** Digital Rights Management (DRM) सिस्टम के परिणामस्वरूप, आपके द्वारा इंटरनेट से डाउनलोड किए गए या डडै द्वारा प्राप्त किए गए कुछ मीडिया आइटम्स तक पहुँच के लिए उनमें एक "अधिकार खरीदें" मेनू हो सकता है। आप उस वेबसाइट से सीधे अधिकार खरीदने के लिए कुंजी प्राप्त कर सकते हैं जो सामग्रियों के लिए अधिकारों का स्वामित्व

# संगीत

करती हैं.



संगीत अंतर्राष्ट्रीय संधियों और रा ट्रीय कॉपीराइट कानून में कॉपीराइट द्वारा सुरक्षित है. संगीत को पुनरु बनाने या प्रतिलिपि बनाने के लिए अनुमति या एक लाइसेंस प्राप्त करना आवश्यक हो सकता है. कुछ देशों में रा ट्रीय कानून कॉपीराइट की गई सामग्रियों की निजी प्रतिलिपि बनाने से प्रतिबंधित करता है. कृपया इस प्रकार की सामग्री के उपयोग से संबंधित उचित देश के रा ट्रीय कानून को जाँच लें.

# वॉइस रिकॉर्डर

## वॉइस रिकॉर्डर का उपयोग करना

वॉइस मेमो या अन्य ध्वनियाँ रिकॉर्ड करने के लिए अपने वॉइस रिकॉर्डर का उपयोग करें.

## अपने वॉइस मेमो को रिकॉर्ड करना

- 1  दबाएँ और उपकरण का चयन करें और तब वॉइस रिकॉर्डर को चुनें.
- 2 रिकॉर्डिंग प्रारंभ करने के लिए  कुंजी दबाएँ .
- 3 रिकॉर्डिंग बंद करने के लिए बंद करें चुनें.
- 4 विकल्प का चयन करें और रिकॉर्डिंग को सुनने के लिए चलाएँ का चयन करें.


**नोट:** आप ध्वनि पर जाएँ का चयन कर सहेजे गए सभी वॉइस रिकॉर्डिंग को सुन सकते हैं.

## वॉइस रिकॉर्डिंग को भेजना

- 1 रिकॉर्डिंग समाप्त होने के बाद, विकल्प का चयन करें.
- 2 के द्वारा भेजें का चयन करें और संदेश, ईमेल और Bluetooth से चुनें. यदि आप संदेश या ईमेल चुनते हैं, तो रिकॉर्डिंग संदेश में जुड़ जाएगी और आप सामान्य रूप में लिखकर इसे भेज सकते हैं. यदि आप Bluetooth चुनते हैं तो आप Bluetooth को चालू करने का संकेत पाएँगे.

# मेरी वस्तुएँ

आप अपनी फोन स्मृति में किसी भी मल्टीमीडिया फाइल्स को संग्रह कर सकते हैं, ताकि आपकी सभी चित्रों, ध्वनियों, वीडियोज और खेलों तक आसान पहुँच हो. आप अपनी फाइलों को स्मृति कार्ड में भी सहेज सकते हैं. स्मृति कार्ड के उपयोग का लाभ यहाँ है, कि आप अपनी फोन स्मृति में स्थान रिक्त कर सकते हैं.

आपकी सभी मल्टीमीडिया फाइल्स मेरी वस्तुएँ में सहेजी गई हैं. फोल्डर्स की सूची खोलने के लिए  दबाएँ और फिर मेरी वस्तुएँ का चयन करें.

## छवियाँ

छवियों में डिफॉल्ट छवियों, आपके फोन पर पहले से लोड किए गए डिफॉल्ट फ्लैश फाइल्स, आपके द्वारा डाउनलोड की गई छवियाँ और आपके फोन कैमरे पर ली गई छवियों के फोल्डर्स शामिल हैं.

## चित्र विकल्प मेनू

वे विकल्प जो छवियों में आप के लिए उपलब्ध होते हैं आपके द्वारा चयन की गई छवि पर आधारित होते हैं.

निम्न विकल्पों को लाने के लिए छवि फोल्डर में विकल्प का चयन करें.

**हटाएँ** - चयन की गई छवि हटाएँ.

**इस रूप में सेट कर** - अपनी चयनित छवि को अपने वॉलपेपर, चित्र ID, स्टार्ट-अप, शट डाउन, इनकमिंग कॉल और आउटगोइंग कॉल के रूप में सेट करें.

**नाम बदलें** - चयनित छवि का फाइल नाम परिवर्तित करें.

**ले जाएँ** - छवि को किसी भिन्न फोल्डर में ले जाने के लिए.

**प्रतिलिपि** - छवि की किसी भिन्न फोल्डर में प्रतिलिपि बनाने के लिए.

**इसके द्वारा भेज** - संदेश के द्वारा चयनित छवि अपने मित्र को भेजें. ईमेल, **Bluetooth**.

**Bluetooth द्वारा मुद्रित कर** - छवि फाइल को **Bluetooth** द्वारा मुद्रित करें.

**फाइल जानकारी** - चयनित छवि का (नाम, आकार, समय, रिजॉल्यूशन, प्रकार और संरक्षण).

**एकाधिक-चयन** - हटाने के लिए एक या अधिक छवियों का चयन करें.

**खोजें** - फाइल नाम से छवि खोजें.

**इससे सॉर्ट कर** - अपनी छवि को दिनांक, प्रकार या नाम से सॉर्ट करें.

**स्लाइड शा** - अपनी छवियों की स्लाइड शा देखें.

**ग्रिड दृश्य/सूची दृश्य** - आप जिस तरीके से अपनी फोटोज देखते हैं, उसे परिवर्तित करें.


**स्मृति जानकारी** - आप स्मृति स्थिति देख सकते हैं (हैण्डसेट स्मृति या बाह्य स्मृति).

**सभी हटाएँ** - सभी छवियाँ हटाएँ.


## फोटो भेजना

- 1  दबाएँ और फिर मेरी वस्तुएँ चुनें.
- 2 छवियाँ चयनित करें
- 3 एक फोटो चयनित करें और विकल्प चुनें.
- 4 इससे भेजें का चयन करें और संदेश, ई-मेल, **Bluetooth** से चुनें.
- 5 यदि आप संदेश या ईमेल चुनते हैं, तो आपका फोटो संदेश के साथ अनुलग्न किया जाएगा और आप सामान्य रूप से अपने संदेश लिख और भेज सकते हैं. अगर आप **Bluetooth** चुनते हैं, तो आपको **Bluetooth** चालू करने का संकेत दिया जाएगा और आपका फोन चित्र भेजने के लिए एक डिवाइस की खोज करेगा.

## अपनी छवियाँ व्यवस्थित करें

- 1  दबाएँ और फिर मेरी वस्तुएँ चुनें.
- 2 छवियाँ चयनित करें.
- 3 विकल्प चुनें फिर इसके द्वारा सॉर्ट करें चयनित करें.
- 4 दिनांक, प्रकार या नाम से चुनें.

## एक छवि हटाना

- 1  दबाएँ और फिर मेरी वस्तुएँ चुनें.
- 2 छवियाँ चयनित करें.
- 3 एक छवि चयनित करें और विकल्प दबाएँ.
- 4 हटाएँ का चयन करें और हाँ दबाकर पुष्टि करें.

# मेरी वस्तुएँ

## एक स्लाइड शो बनाना

यदि आप अपने फोन पर सभी फोटो को देखना चाहते हैं या आपने जो प्राप्त किया है उसे स्कैन करना चाहते हैं, तो प्रत्येक छवि को अलग-अलग खोलने और बंद करने से बचने के लिए आप स्लाइड शो बना सकते हैं।

- 1 ● दबाएँ और फिर मेरी वस्तुएँ चुनें।
- 2 छवियों का चयन करें।
- 3 आप जिसमें छवि से स्लाइड शो को प्रारंभ करना चाहते हैं, उसे चुनें और विकल्प का चयन करें।
- 4 स्लाइड शो चुनें और यहाँ शुरू हो जाएगा।
- 5 स्लाइड शो को रोकने के लिए रोकें और स्लाइड शो को समाप्त कर छवि फोल्डर में वापस लौटने के लिए पीछे दबाएँ।

स्लाइड शो के दौरान फुल स्क्रीन दृश्य, लैंडस्केप दृश्य और सेटिंग्स चुनने के लिए विकल्प चुनें। फुल स्क्रीन मोड में देखने के लिए फुल स्क्रीन दृश्य, चित्रों के ओरिएंटेशन को परिवर्तित करने के लिए लैंडस्केप दृश्य और दोहराए जाने के प्रकार, अवधि को सेट करने के लिए सेटिंग्स का चयन करें।

## ध्वनियाँ

ध्वनि फोल्डर में डिफॉल्ट ध्वनियाँ, आपके डाउनलोड किए गए रिंगटोन्स और आपके द्वारा डाउनलोड की गई ध्वनि फाइल्स शामिल होती हैं। यहाँ से आप ध्वनियों को रिंगटोन के रूप में भेज या सेट कर सकते हैं।

## एक ध्वनि का उपयोग करना

- 1 ● दबाएँ और फिर मेरी वस्तुएँ चुनें।
- 2 ध्वनियाँ स्कॉल करें और चयनित करें।
- 3 ध्वनि का चयन करें और इसे सुनने के लिए प्ले दबाएँ।
- 4 विकल्प का चयन करें इस रूप में सेट करें का चयन करें और वॉइसध्विडियो रिंगटोन, संदेश टोन, स्टार्ट-अप और पावर बंद ध्वनि में से चुनें।

## वीडियो

वीडियो फोल्डर डाउनलोड किए गए वीडियो और आपके द्वारा अपने फोन पर रिकॉर्ड किए वीडियो को दिखाता है।

## एक वीडियो देखना

- 1 ● दबाएँ और फिर मेरी वस्तुएँ चुनें.
- 2 ध्वनियाँ स्कॉल करें और चयनित करें.
- 3 वीडियो का चयन करें और प्ले दबाएँ.

## वीडियो चलाए जाने के बाद विकल्पों का उपयोग करना

विकल्प, का चयन करके वीडियो जो आप प्ले कर रहे हैं और आप जिससे चुन सकते ह:

**हटाएँ** - वीडियो हटाएँ.

**इस रूप में सेट कर** - आप किसी वीडियो क्लिप का उपयोग रिंगटोन के रूप में कर सकते हैं.

**इसके द्वारा भेजें** - संदेश, ईमेल, **Bluetooth** के द्वारा भेजें.

**फाइल जानकारी** - वीडियो का विवरण देखें.

**लैंडस्केप दृश्य** - वीडियो का ओरिएंटेशन पुनः करें.

**दोहराएँ** - वीडियो दोहराएँ.

## एक वीडियो क्लिप भेजना

- 1 ● दबाएँ और फिर मेरी वस्तुएँ चुनें.
- 2 ध्वनियाँ स्कॉल करें और चयनित करें.
- 3 आप जिस वीडियो क्लिप को चाहते हैं उसे चयनित करें और विकल्प दबाएँ.
- 4 इसके द्वारा भेजें दबाएँ और इसके द्वारा भेजें – संदेश, ई-मेल, Bluetooth से चुनें.
- 5 यदि आप संदेश या ईमेल चुनते हैं, तो आपका वीडियो क्लिप संदेश के साथ अनुलग्न किया जाएगा और आप सामान्य रूप से अपने संदेश लिख और भेज सकते हैं. अगर आप Bluetooth चुनते हैं, तो आपको Bluetooth चालू करने का संकेत दिया जाएगा और आपका फोन वीडियो भेजने के लिए एक डिवाइस की खोज करेगा.

**नोट:** इससे पहले कि वीडियो को MMS द्वारा भेजा जा सके इसे पुनरु आकार देने की आवश्यकता हो सकती है. कुछ वीडियो MMS द्वारा भेजे जाने के लिए बहुत बड़े हो सकते हैं.

# मेरी वस्तुएँ

## खेल / अनुप्रयोग

आप डाउनलोड किए गए खेल और अनुप्रयोगों को इस फोल्डर में रख सकते हैं.

## अन्य

अन्य मेनू से आप उन फाइल्स को देख सकते हैं, जो चित्रों, ध्वनियों या वीडियोज में नहीं सहेजे गए हैं.



# खेल और अनुप्रयोग

## खेल और अनुप्रयोग

जब आप समय निकाल सकें तो आपको खुश रखने के लिए आपका GU285 पहले से लोड किए गए खेल के साथ आता है। यदि आप कोई भी अतिरिक्त गेम या अनुप्रयोग डाउनलोड करने का चयन करते हैं तो वे इस फोल्डर में सहेजे जाएँगे।

## एक खेल खेलना

- 1 ● दबाएँ और खेल और अनुप्रयोग का और फिर खेल चयन करें।
- 2 आप नए खेलों को डाउनलोड करने और आपके फोन पर पहले से मौजूद डेमो खेलों को प्ले करने के लिए इस मेनू का उपयोग कर सकते हैं।

**नोट:** खेल डाउनलोड सेवा से कनेक्ट होने पर अतिरिक्त मूल्य लगता है। अपने नेटवर्क प्रदाता से अपने डेटा शुल्क का पता करें।

# ऑर्गनाइजर

## अपने कैलेंडर से इवेंट जोड़ना

- 1 दबाएँ, ऑर्गनाइजर का, फिर कैलेंडर चयन करें.
- 2 आप जिसमें दिनांक से इवेंट जोड़ना चाहते हैं, उसका चयन करें. दिनांक दर्ज करने के लिए आप या तो नेविगेशन कुंजियों का उपयोग कर स्कॉल करके या विकल्प और दिनांक पर जाएँ चुनकर कोई दिनांक चुन सकते हैं.
- 3 नई शेड्यूल का चयन करें और आप जिसमें समय अपने इवेंट को प्रारंभ करना चाहते हैं, उसका समय दर्ज करने के लिए नीचे स्कॉल करें. नीचे स्कॉल करें और आपके इवेंट समाप्त करने का समय दर्ज करें.
- 4 इवेंट के लिए विषय दर्ज करें. अक्षर और संख्या लिखने के लिए कुंजीपैड का उपयोग करें.
- 5 फिर से नीचे स्कॉल करें और चुनें कि क्या आप इवेंट के लिए एक अलार्म सेट करना चाहेंगे. उपलब्ध विकल्पों को देखने के लिए बाएँ या दाएँ स्कॉल करें. इवेंट आ रहा है, आपको यहाँ याद दिलाने के लिए आप इवेंट के प्रारंभ समय या इवेंट के प्रारंभ होने के पूर्व

समय की सेट अवधि से बाहर जाने के लिए अलार्म सेट कर सकते हैं.

- 6 इवेंट एक बार हो रहा है या प्रतिदिन, साप्ताहिक, मासिक या वार्षिक अंतराल पर दोहराया जा रहा है इसका चयन करने के लिए एक बार और स्कॉल करें. आप उपयोगकर्ता सेटिंग्स भी चुन सकते हैं. यदि इवेंट दोहराया जा रहा है, तो आप जब इवेंट पूरी तरह समाप्त हो जाएगा, तब के लिए समाप्ति दिनांक दर्ज करने के लिए भी आप नीचे स्कॉल कर सकते हैं.
- 7 पूर्ण का चयन करें और आपका इवेंट कैलेंडर में सहेजा जाएगा. एक वर्गाकार कर्सर किसी भी सहेजे गए इवेंट को चिह्नित करता है.


## कैलेंडर इवेंट का संपादन करना

- 1 होम स्क्रीन से दबाएँ और ऑर्गनाइजर और फिर कैलेंडर का चयन करें.
- 2 आप अपने सभी इवेंट्स की सूची देख सकते हैं. आप जिस इवेंट को संपादित करना चाहते हैं उसपर स्कॉल करें और फिर देखें का चयन करें.
- 3 विकल्प दबाएँ और संपादित करें का चयन करें और उस इवेंट विवरण पर

स्क़ॉल करें, जिसे आप परिवर्तित करना चाहते हैं. अपने संशोधन करें और संपादित इवेंट को संग्रह करने के लिए पूर्ण का चयन करें.

**नोट:** आप इवेंट को देख कर और फिर विकल्प और हटाएँ को दबाकर किसी इवेंट को कैलेंडर से हटा सकते हैं.


### कैलेंडर इवेंट साझा करना

- 1 होम स्क्रीन से  दबाएँ और ऑर्गनाइजर और फिर कैलेंडर का चयन करें.
- 2 साझा किए जाने वाले इवेंट को चुनें और विकल्प का चयन करें.
- 3 द्वारा भेजें को चुनें और पाठ संदेश, डब्ल्यू, ई-मेल या Bluetooth से चयन करें.
- 4 भेजें दबाएँ और सामग्री खोजें, भेजें दबाएँ.

### टू-डू सूची जोड़ना

आप टू डू कार्यों को देख सकते हैं और कार्यों को करने के लिए जोड़ सकते हैं. कार्य समय क्रम में प्रदर्शित होते हैं.

### मेमो जोड़ना

- 1 होम स्क्रीन से  दबाएँ और ऑर्गनाइजर, तब मेमो का चयन करें.
- 2 नए मेमो का चयन करें और अपने मेमो को लिखें.
- 3 सहेजें का चयन करें.
- 4 आपका मेमो स्क्रीन पर आपको अगली बार मेमो अनुप्रयोग खोलने पर दिखाई देगा.

**TIP!** आप वर्तमान मेमो को संपादित कर सकते हैं. किसी एक का चयन करें, जिसे आप संपादित करना चाहते हैं. विकल्प दबाएँ और संपादन करें का चयन करें.

### दिनांक ढूँढने वाला

दिनांक ढूँढने वाला एक हैंडी उपकरण है जो दिनों की एक निश्चित संख्या के बीतने के बाद कौन सा दिनांक होगा, यह परिकलित करने में आपकी मदद करता है.

## उपकरण

### त्वरित मेनू

आप त्वरित मेनू में सहेजने के लिए फंक्शंस को निर्दिष्ट कर सकते हैं. यदि आप त्वरित मेनू में त्वरित रूप से उपयोग किए जाने वाले फंक्शंस को सहेजते हैं तो आप त्वरित रूप से संगत कुंजी को दबाकर उनका उपयोग कर सकते हैं.

### अपना अलार्म सेट करना

- 1 ● दबाएँ और अलार्म घड़ी का चयन करें.
- 2 नए अलार्म दबाएँ
- 3 स्कॉल डाउन करें और उस समय को दर्ज करें जब आप अलार्म बजना पसंद करेंगें.
- 4 आप अपने अलार्म को एकबार, प्रतिदिन, सोम – शुक्र, सोम – शनि, अवकाश के अतिरिक्त या सप्ताह के दिन चुनें के दिन बजना पसंद करेंगे या नहीं, इंगित करने के लिए दोहराएँ प्रकार को चुनें.
- 5 स्कॉल डाउन करें और क्या आप इस अलार्म प्रकार को पसंद करेंगे या नहीं को चुनें.
- 6 अलार्म स्नूज के अंतराल को चुनने के लिए स्कॉल डाउन करें.

7 स्कॉल डाउन करें और अलार्म का नाम दर्ज करें या सुझाए गए नाम रखें.

8 पूर्ण का चयन करें.

### अपने कैल्क्यूलेटर का उपयोग करना

- 1 ● दबाएँ, और चयन करें उपकरण, तबकैल्क्यूलेटर.
- 2 इनपुट संख्याओं के लिए सांख्यिक कुंजियों को दबाएँ.
- 3 सामान्य परिकलन के लिए, = के बाद नेविगेशन कुंजियों का उपयोग करके आवश्यक (+, -, ×, ÷) फंक्शन का उपयोग करें.
- 4 जटिल परिकलनों के लिए, आदेश को चुनने के लिए विकल्प का चयन करें.
- 5 स्क्रीन साफ करने के लिए साफ करें कुंजी का चयन करें और नए परिकलन को प्रारंभ करें.

## स्टॉपवॉच का उपयोग करना

- 1 ● दबाएँ, और उपकरण का चयन करें तब स्टॉपवॉच का चयन करें.
- 2 टाइमर शुरू करने के लिए प्रारंभ चुनें.
- 3 यदि आप लैप समय रिकॉर्ड करना चाहते हैं तो लैप चुनें. 99 लैप समय तक सहेजे जा सकते हैं.
- 4 टाइमर को रोकने के लिए रोकें चुनें.
- 5 जिस समय आपने स्टॉपवॉच को रोका है उसी समय से शुरू करने के लिए जारी रखें चुनें या फिर शून्य पर जाने के लिए रीसेट चुनें.

## इकाई कनवर्ट करना

- 1 ● दबाएँ और उपकरण का चयन करें और तब इकाई कनवर्टर का चयन करें.
- 2 आप मुद्रा, क्षेत्र, लंबाई, भार, तापमान, मात्रा या द्रव्यमान को कनवर्ट करना चाहेंगे या नहीं, को चुनें.
- 3 एक इकाई का चयन करने के लिए बाएँ और दाएँ स्कॉल करें, और फिर नीचे स्कॉल करके इकाई मात्रा दर्ज करें.

- 4 इकाई कनवर्जन बॉक्स के लिए स्कॉल डाउन करें और उस इकाई माप को खोलें जिसमें आप कनवर्ट करना चाहते हैं. कनवर्जन स्वचालित रूप से नीचे पंक्ति में दिखाई देगा.

**नोट:** मुद्रा कनवर्ट करने के लिए, आपको पहले वर्तमान विनिमय दर के अनुसार 'दर' को सेट करने की आवश्यकता होगी.

## आपके विश्व समय में एक नगर को जोड़ना

- 1 होम स्क्रीन से ● दबाएँ और उपकरण का चयन करें तब विश्व घड़ी का चयन करें.
- 2 निर्दिष्ट नगर के नाम का पता लगाने के लिए, विकल्प दबाएँ और नया नगर का चयन करें.
- 3 सूची को स्कॉल डाउन करें या नगर के पहले अक्षर को लिखें. आप मैप का भी चयन कर सकते हैं और एक नगर चुनें.
- 4 चयन करें दबाएँ.

**TIP!** प्रक्रिया को जल्दी करने के लिए, आप आवश्यक शहर के पहले अक्षर का चयन कीपैड से कर सकते हैं.

## ब्राउजर

अपनी उंगली पर ब्राउजर के साथ आप ताजा समाचार और मौसम की भविष्यवाणी, साथ ही साथ आपको जब आवश्यकता हो तो खेल या यातायात की जानकारी प्राप्त कर सकते हैं. इसके अतिरिक्त, ब्राउजर से आप नवीनतम संगीत, रिंगटोन, वॉलपेपर और गेम डाउनलोड कर सकते हैं.

### वेब तक पहुँच बनाना

- 1 ● दबाएँ और ब्राउजर का चयन करें.
- 2 ब्राउजर होमपेज पर सीधे पहुँचने के लिए, ब्राउजर का चयन करें.

**नोट:** इस सेवा से कनेक्ट होने और सामग्री डाउनलोड करने के लिए अतिरिक्त शुल्क लगाया जाता है. अपने नेटवर्क प्रदाता से अपने डेटा शुल्क का पता करें.

### अपने बुकमार्क्स को जोड़ना और उन तक पहुँच बनाना

अपनी वेबसाइट्स तक आसान और त्वरित पहुँच के लिए, आप बुकमार्क्स जोड़ और वेब पृष्ठों को सहेज सकते हैं.

- 1 ● दबाएँ और ब्राउजर का चयन करें.
- 2 बुकमार्क्स का चयन करें. स्क्रीन पर आपके बुकमार्क्स की एक सूची प्रकट होगी.
- 3 नया बुकमार्क जोड़ने के लिए, विकल्पों का चयन करें और नया बुकमार्क चुनें. URL के बाद अपने बुकमार्क का नाम लिखें.
- 4 पूर्ण दबाएँ. आपका बुकमार्क अब बुकमार्क्स की सूची में प्रकट होगा.
- 5 बुकमार्क पर पहुँच के लिए केवल स्क्रॉल करके इच्छित बुकमार्क पर जाएँ और कनेक्ट करें का चयन करें. आप अपने बुकमार्क किए गए पृष्ठ से कनेक्ट हो जाएँगे.

## RSS पाठक

RSS पाठक आपके फोन पर पंजीकृत वेबसाइट्स के लिए अद्यतन समाचार प्रदान करता है।

### एक पृष्ठ सहेजना

- 1 अपने आवश्यक वेब पेज पर पहुँचें।
- 2 विकल्प को चुनें और सहेजें के लिए स्कॉल करें, यह पृष्ठ का चयन करें।
- 3 ठीक चयनित करें।

### एक सहेजे गए पृष्ठ तक पहुँच बनाना

- 1 ● दबाएँ और ब्राउजर का चयन करें।
- 2 सहेजे गए पृष्ठ चयनित करें।
- 3 इच्छित पृष्ठ चुनें और खोलें दबाएँ।

**TIP!** यह मेनू आपको सहेजे गए पृष्ठों को हटाने की अनुमति देता है।

## अपना ब्राउजिंग इतिहास देखना

- 1 ● दबाएँ और ब्राउजर का चयन करें।
- 2 इतिहास चयनित करें और ठीक चयनित करें।
- 3 आपके द्वारा हाल ही में पहुँच प्राप्त किए गए वेब पेज शीर्षकों की सूची प्रदर्शित होगी। इनमें से एक पृष्ठ पर पहुँच के लिए, आवश्यक पृष्ठ पर स्कॉल करें और खोलें का चयन करें।

## वेब ब्राउजर सेटिंग्स परिवर्तित करना

- 1 ● दबाएँ और ब्राउजर का चयन करें।
- 2 सेटिंग्स का चयन करें।
- 3 आप इंटरनेट ब्राउज करते समय उस तरीके को चुन सकते हैं जिससे आपका मोबाइल हैंडल, प्रदर्शित और जानकारी का उपयोग करता है। आप प्रोफाइल्स, वर्ण कोडिंग, स्कॉलिंग नियंत्रण, छवि दिखाएँ, जावा स्क्रिप्ट कैश, कुकीज, सुरक्षा और सेटिंग्स रीसेट करें में सेटिंग्स संशोधित कर सकते हैं।
- 4 अपने सेटिंग्स को एक बार परिवर्तित कर लेने के बाद, चयन करें दबाएँ।

# सेटिंग्स

अपने GU285 को व्यक्तिगत बनाने के लिए आप अपनी सेटिंग्स इस फोल्डर के अंतर्गत अपना सकते हैं.

**नोट:** कॉल सेटिंग्स पर जानकारी के लिए पृष्ठ 25 देखें.

## अपने प्रोफाइल्स को परिवर्तित करना

- 1 सेटिंग्स चुनें और प्रोफाइल चुनें.
- 2 सामान्य, मौन, आउटडोर और फ्लाइट मोड में से चुनें.

**Tip!** फ्लाइट मोड को चालू या बंद करने के लिए इस फंक्शन का उपयोग करें. जब फ्लाइट मोड चालू है, तो आप कॉल्स करने, इंटरनेट से कनेक्ट होने या संदेश भेजने के योग्य नहीं होंगे.

## अपने प्रोफाइल्स को कस्टमाइज करना


आप प्रत्येक प्रोफाइल सेटिंग कस्टमाइज कर सकते हैं.

- 1 सेटिंग्स दबाएँ और प्रोफाइल का चयन करें.
- 2 इच्छित प्रोफाइल का चयन करें, विकल्प का चयन करें और व्यक्तिगत चुनें.

- 3 आप सभी टोन्स, इसकी वॉल्यूम और चेतावनी विकल्पों को यहाँ से सेट कर सकते हैं.

## अपना दिनांक और समय परिवर्तित करना

आप दिनांक और समय से संबंधित फंक्शन सेट कर सकते हैं.

- 1  दबाएँ और सेटिंग्स खोलें.
- 2 दिनांक और समय का चयन करें और नीचे दी गई सूची से चुन:

**दिनांक और समय सेटिंग** - आप वर्तमान समय/वर्तमान दिनांक दर्ज कर सकते हैं, दिनांक और समय सेट करें, जैसे स्वतः अद्यतन सेटिंग या डे लाइट सहेजना.

**नोट** चालू का चयन करें और फोन स्वचालित रूप से दिनांक और समय का अद्यतन करेगा.

**नोट** चयन करें, कि क्या डे लाइट बचत फंक्शन को सक्रिय करना है या नहीं. आप चयनित घरेलु शहर के ग्री मकाल अंतर को 1 घंटे या 2 घंटे के लिए सेट कर सकते हैं.

**समय स्वरूप** - आप समय स्वरूप को 12 घंटे या 24 घंटे पर सेट कर सकते हैं. आप समय जोन के रूप में शहर का चयन कर सकते हैं.



**दिनांक सेपरेटर** - आप दिनांक स्वरूप (YYYY.MM.DD, DD.MM.YYYY, MM.DD.YYYY) को सेट कर सकते हैं।


**दिनांक सेपरेटर** - प्रत्येक दिनांक दिन, माह और वर्ष को सेट करें।

## भाषा परिवर्तित करना

अपने फोन में किसी भी पाठ की भाषा को परिवर्तित करने के लिए Settings पर जाएँ, फोन का चयन करें और भाषा चुनें। कोई भी परिवर्तन भाषा इनपुट मोड को भी बदल देगा।

## अपनी शॉर्टकट सेटिंग्स परिवर्तित करना

अपने GU285 और यह जिस महत्वपूर्ण जानकारी को संरक्षित रखता है उसे बचाए रखने के लिए अपनी सुरक्षा सेटिंग्स परिवर्तित करें।

- 1  दबाएँ और सेटिंग्स खोलें।
- 2 सुरक्षा चयनित करें और नीचे की सूची से चुनें:

**हैंडसेट लॉक** - आपके फोन को तब लॉक करने के लिए जब चालू हो, जब सिम परिवर्तित किया जाए, तुरंत या कोई नहीं सुरक्षा कोड चुनें।


**अनुप्रयोग लॉक** - इस फंक्शन का उपयोग करने पर लॉक करने के लिए मेनू चुनें।

**पिन कोड अनुरोध** - एक पिन कोड चुनें जो आपके फोन चालू करने पर माँगा जाए।

**कोड्स परिवर्तित करें** - अपने **PIN कोड**, **PIN2 कोड** या लॉक कोड को परिवर्तित करें।

**नोट:** लॉक कोड (4 से 8 अंक) लॉक कोड आपके फोन को अनधिकृत उपयोग से संरक्षित करता है। इसकी आपूर्ति सामान्य तौर पर फोन के साथ की जाती है। सभी फोन प्रविष्टियों को हटाने के लिए और "सेटिंग्स रीसेट करें" मेनू को सक्रिय करने के लिए यह कोड आवश्यक है। डिफॉल्ट नंबर "0000" है।

## अपनी प्रदर्शन सेटिंग्स परिवर्तित करना

- 1  दबाएँ और सेटिंग्स का चयन करें।
- 2 स्क्रीन चयनित करें और इसमें से चुनें:

**होमस्क्रीन** - होम स्क्रीन का चयन करें और अपने स्क्रीन पर प्रकट होने के लिए एक वॉलपेपर चुनें, आप प्रदर्शन आइटम भी सेट कर सकते हैं।

# सेटिंग्स

**हैंडसेट थीम** - अपने स्क्रीन के संपूर्ण लुक को तुरंत परिवर्तित करें.

**मेनू शैली** - मेनू दृश्य को सूची शैली से ग्रीड शैली में परिवर्तित करें.

**फॉन्ट** - फॉन्ट आकार को छोटे, मध्यम, बड़े और काफी बड़े में परिवर्तित करें.

**शुभकामना संदेश** - चालू का चयन करने के बाद, आप एक स्वागत संदेश लिख सकते हैं. आप जब भी अपने फोन को प्रारंभ करेंगे, यह संदेश स्क्रीन पर प्रकट होगा.

**बैकलाइट** - चुनें कि बैकलाइट कब तक चालू रहेगी. साथ ही, मुख्य स्क्रीन की ब्राइटनेस को व्यवस्थित करने के लिए नेविगेशन कुंजियों का उपयोग करें. 0%, 20%, 40%, 60%, 80% या 100% से चुनें.

**TIP!** इसके लिए जितनी देर तक बैकलाइट चालू रहता है, उतना ही बैटरी पॉवर का उपयोग होता है और आपको अपने फोन को बार-बार चार्ज करने की आवश्यकता पड़ सकती है.

**अन्य स्क्रीन** - कॉल करते या प्राप्त करते समय या फोन को चालू/बंद करते समय स्क्रीन को सेट करें.

## अपने फोन को रीसेट करना

सभी सेटिंग्स को फ़ैक्ट्री परिभाषाओं पर रीसेट करने के लिए सेटिंग्स में सेटिंग्स रीसेट करें का उपयोग करें. यह फंक्शन सक्रिय करने के लिए आपको सुरक्षा कोड की आवश्यकता होगी.

## स्मृति की स्थिति देखना

आपके GU285 में तीन स्मृतियाँ उपलब्ध हैं: फोन, म्यूजिक कार्ड और बाह्य स्मृति कार्ड (आपको अलग से स्मृति कार्ड खरीदने की आवश्यकता हो सकती है).

आप यह निर्धारित करने के लिए स्मृति प्रबंधक का उपयोग कर सकते हैं कि कितनी स्मृति उपयोग हो चुकी है और कितनी रिक्ति उपलब्ध है.

सेटिंग्स दबाएँ और स्मृति जानकारी चुनें और तब आप अपने GU285 में स्मृतियों की वर्तमान स्थिति को देख पाएंगे (हैंडसेट सामान्य स्मृति, हैंडसेट आरक्षित स्मृति, USIM स्मृति, बाह्य स्मृति).

# कनेक्टिविटी

## अपनी कनेक्टिविटी सेटिंग्स बदलना

आपकी कनेक्टिविटी सेटिंग्स आपके नेटवर्क ऑपरेटर द्वारा पहले ही सेट अप हो चुकी है, इसलिए आप सीधे अपने नए फोन का आनंद ले सकते हैं। यदि आप कोई सेटिंग्स बदलना चाहते हैं, तो इस मेनू का उपयोग करें।

कनेक्टिविटी का चयन करें। आपके विकल्प इस प्रकार हैं:

**Bluetooth** - Bluetooth उपयोग के लिए अपना GU285 सेट अप करें। आप अपनी दृश्यता को अन्य डिवाइसेस के लिए दर्शा सकते हैं या उन डिवाइस से खोज सकते हैं जिनसे आपका फोन जुड़ा है।

**USB कनेक्शन** - आप विभिन्न उपयोगों के लिए अपने फोन पर USB कनेक्शन मोड का चयन कर सकते हैं।

**नेटवर्क** - आप इस मेनू का उपयोग करते हुए नेटवर्क का चयन करें और नेटवर्क मोड को सेट कर सकते हैं। आप पसंदीदा सूचियाँ को कनेक्ट करने के लिए पसंदीदा नेटवर्क को भी जोड़ सकते हैं।

**इंटरनेट प्रोफाइल्स** - यह मेनू इंटरनेट प्रोफाइल्स दिखाता है। आप नए प्रोफाइल्स को बना सकते हैं, विकल्प मेनू का उपयोग करके उन्हें हटा या संपादित कर सकते हैं। हालाँकि, आप डिफॉल्ट कॉन्फिगरेशन को हटा या संपादित नहीं कर सकते हैं।

**पहुँच बिंदु** - यह मेनू पहुँच बिंदु सूची को दिखाता है। आप नए प्रोफाइल्स को बना सकते हैं, विकल्प मेनू का उपयोग करके उन्हें हटा या संपादित कर सकते हैं। हालाँकि, आप डिफॉल्ट कॉन्फिगरेशन को हटा या संपादित नहीं कर सकते हैं।

**पैकेट डेटा कनेक्शन** - यदि आप 'जब उपलब्ध हो' विकल्प का चयन करते हैं तो जब आप फोन को चालू करते हैं तो आपका फोन स्वचालित रूप से GPRS नेटवर्क से पंजीकृत हो जाता है। यदि आप "जब आवश्यकता" का चयन करते हैं तो GPRS कनेक्शन WAP या अनुप्रयोग कनेक्शन की अवधि के लिए स्थापित होता है।

**स्ट्रीमिंग सेटिंग्स** - आपके नेटवर्क ऑपरेटर ने पहले से ही इस जानकारी को सहेजा है। यदि आप परिवर्तन करना चाहें तो आप इसे संपादित कर सकते हैं।

# कनेक्टिविटी

## अपनी Bluetooth सेटिंग्स बदलना

- 1 कनेक्टिविटी का चयन करें और तब **Bluetooth** को चुनें.
- 2 सेटिंग्स चुनें. इनमें अपने परिवर्तन कर:

**मेरी डिवाइस दृश्यता** - खेरी डिवाइस दृश्यता, खदृश्यमान, सेट करें ताकि अन्य डिवाइसेस आपके फोन को तब खोज सकें जब व Bluetooth device डिवाइस को खोज रहे हों. यदि आप छुपाएँ का चयन करते हैं तो अन्य डिवाइसेस आपके फोन को खोजने में तब सक्षम नहीं हो पाएँगे जब वे Bluetooth डिवाइस को खोज रहे हों. यदि आप 1 मिनट के लिए दृश्यता का चयन करते हैं तो अन्य डिवाइसेस 1 मिनट में आपके फोन को खोजने में सक्षम होंगे.

**मेरे डिवाइस का नाम** - आप अपने फोन को नाम दे सकते या नाम बदल सकते हैं, जैसा यह अन्य डिवाइसेस पर दिखाई देगा. आपके फोन का नाम अन्य डिवाइसेस पर केवल तभी दिखाया जाएगा जब मेरी डिवाइस दृश्यता, दृश्यमान के लिए सेट है.

**समर्थित सेवाएँ** - आप इस Bluetooth सक्षम फोन से डिवाइसेस की सूची जैसे हेडसेट्स और हैंड्सपरी की सूची को देख सकते हैं.

**मेरा पता** - अपने Bluetooth पते की यहाँ जाँच करें.

**नोट:** सुरक्षा को बेहतर बनाने के लिए, हम अनुशंसा करते हैं कि एक बार आपके डिवाइस को कॉन्फिगर करने या जोड़ा बनाने पर दृश्यता छुपाने के लिए सेट कर दी जाए. आवक कनेक्शंस के लिए, इसके बिना कि अन्य डिवाइस आपके फोन से जुड़ा है या नहीं, आप कनेक्शन को स्वीकारने या रद्द करने का चयन कर सकते हैं

## दूसरी Bluetooth डिवाइस से जुड़ना

अपने GU285 और अन्य डिवाइस से जुड़ने के बाद आप पासकोड सुरक्षित कनेक्शन को सेट अप कर सकते हैं. इसका अर्थ है कि आप अधिक सुरक्षित तरीके से जुड़े हैं.

- 1 जाँचे कि आपका Bluetooth चालू और दृश्यमान है. सेटिंग्स मेनू में मेरी डिवाइस दृश्यता, का चयन कर तब दृश्यमान का चयन कर दृश्यता को परिवर्तित कर सकते हैं.
- 2 Bluetooth से चालू करें और नए डिवाइस खोजें को चुनें.

- 3 आपका GU285 डिवाइसेस को खोजेगा। जब खोज पूर्ण हो जाए तो जोड़ें और पुनरुप्रासास करें स्क्रीन पर दिखाई देगा।
- 4 आप उस डिवाइस को चुनें जिससे जुड़ना चाहते हैं, जोड़ें का चयन करें और पासकोड को दर्ज करें और तब ठीक को चुनें।
- 5 इसके बाद आपका फोन दूसरी डिवाइस से कनेक्ट हो जाएगा, जिसमें आपको वही पासकोड लिखना होगा।
- 6 अब आपका पासकोड रक्षित ब्लूटूथ कनेक्शन तैयार है। एक Bluetooth हेडसेट का उपयोग करना।

### **एक Bluetooth हेडसेट का उपयोग करना**

- 1 जाँचे कि आपका Bluetooth चालू और दृश्यमान है।
- 2 अपने हेडसेट को युग्मित करने के मोड में रखने और अपने डिवाइसेज को युग्मित करने के लिए इसके साथ आए निर्देशों का अनुसरण करें।
- 3 आपका GU285 तब स्वचालित रूप से आपके Bluetooth हेडसेट से कनेक्ट हो जाएगा और हेडसेट प्रोफाइल में सविच करेगा।

### **एक फाइल को अपने फोन पर स्थानांतरित करना**

आप Bluetooth द्वारा अपने कंप्यूटर से अपने फोन में फाइलें स्थानांतरित भी कर सकते हैं।

- 1 सुनिश्चित करें कि आपके फोन और आपके कंप्यूटर का Bluetooth चालू है और एक दूसरे के लिए दृश्यमान हैं।
- 2 Bluetooth से फाइल भेजने के लिए अपने कंप्यूटर का उपयोग करें।
- 3 फाइल भेजे जाने पर आपको अपने फोन पर हाँ का चयन करके उसे स्वीकार करना होगा।

**नोट:** Bluetooth का उपयोग करके भेजी गई फाइलें फोन स्मृति में सहेज दी जाएँगी।

# कनेक्टिविटी

## Bluetooth का उपयोग करके फाइलें भेजना और प्राप्त करना

फाइलें भेजने और प्राप्त करने के लिए Bluetooth अच्छा तरीका है जैसा कि किसी भी तार की आवश्यकता नहीं होती है और कनेक्शन त्वरित और आसान है। आप कॉल्स करने और प्राप्त करने के लिए एक Bluetooth हेडसेट भी कनेक्ट कर सकते हैं।

ब्लूटूथ के उपयोग से फाइलें साझा करने के पहले, आपको अपने फोन को दूसरे ब्लूटूथ डिवाइस से जोड़ना होगा। युग्मित डिवाइसेज के बारे में जानकारी के लिए, किसी अन्य ठसनमजववजी डिवाइस के साथ युग्मित करना देखें।

### Bluetooth को चालू करने के लिए:

- 1 कनेक्टिविटी का चयन करें और तब Bluetooth को चुनें।
- 2 चालू करें का चयन करें।
- 3 Bluetooth को बंद करने के लिए बंद करें का चयन करें।

### कोई फाइल भेजने के लिए:

- 1 उस फाइल को खोलें जिसे आप भेजना चाहते हैं, विशिष्ट रूप से यह कोई फोटो, वीडियो या संगीत फाइल होगी।
- 2 विकल्प चयनित करें और इसके द्वारा भेजें चुनें फिर Bluetooth चुनें।
- 3 अगर Bluetooth पहले से सक्रिय नहीं है तो इसे चालू करने के लिए हाँ चयनित करें।
- 4 आपका GU285 स्वचालित रूप से क्षेत्र के अंतर्गत Bluetooth सक्षम डिवाइसेस के लिए खोज करेगा।
- 5 वह डिवाइस चुनें जिसे आप फाइल भेजना चाहते हैं और भेजें चुनें।

### एक फाइल प्राप्त करने के लिए:

- 1 फाइल्स को प्राप्त करने के लिए, आपका Bluetooth चालू करें और दृश्यमान दोनों ही होना आवश्यक है।
- 2 आपको प्रेषक की ओर से फाइल स्वीकार करने के लिए एक संदेश द्वारा संकेत मिलेगा। फाइल को प्राप्त करने के लिए हाँ का चयन करें।

**TIP!** आप की फाइल भेज दी गई है यह सुनिश्चित करने के लिए प्रगति पट्टी पर नजर रखें।

**नोट** नोट Bluetooth शब्द चिह्न और लोगो पर Bluetooth SIG Inc, पद. का स्वामित्व है और LG Electronics द्वारा इस प्रकार के किसी भी चिह्न का उपयोग लायसेंस के अंतर्गत है.

## USB कनेक्शन मोड

आप विभिन्न उपयोगों के लिए अपने फोन पर USB कनेक्शन मोड का चयन कर सकते हैं.

### हमेशा मोड पूछें

यदि आप डिफॉल्ट के रूप में "हमेशा पूछें" को सेट करते हैं तो डेटा केबल द्वारा आपके PC के लिए फोन को प्रत्येक बार कनेक्ट करने के लिए फोन आपको हमेशा USB कनेक्शन मोड के एक प्रकार को चयन करने का संकेत देगा. यदि आप "हमेशा पूछें" को अक्षम करते हैं तो कनेक्शन मोड वह होगा जिसे आप मैनयुअल रूप से, मेनू – सेटिंग्स – कनेक्टिविटी – USB कनेक्शन में सेट करते हैं और इंटरनेट, व्यापक संग्रह, PC सूइट या संगीत सिंक्रनाइजेशन में सेट करते हैं.

## PC इंटरनेट—अपने फोन को व्यापक संग्रह डिवाइस के रूप में उपयोग करें.

आपका GU285 व्यापक संग्रह संग्रह डिवाइस के रूप में उपयोग किया जा सकता है, ठीक USB स्टिक के समान. अपने कंप्यूटर से अपने फोन में फाइलें ले जाने का यह एक आसान तरीका है. यदि आप मेमोरी कार्ड सम्मिलित किया है तो जब व्यापक संग्रह के रूप में कनेक्ट कर रहे हों तो फोन और बाहरी मेमोरी प्रदर्शित होंगे.

- 1 डिवाइस से USB केबल अनुलग्न करें.
- 2 पॉपअप मेनू से व्यापक संग्रह का चयन करें.
- 3 निकालने योग्य डिस्क फोल्डर आपके कंप्यूटर पर अपने आप खुलेगा, यदि आपने स्मृति कार्ड सम्मिलित किया है तो आपके फोन या स्मृति कार्ड के सभी फोल्डर बताते हुए दो दिखाई देंगे.
- 4 अपने फोटो, वीडियो, संगीत या दस्तावेजों को सही फोल्डर्स में खींचें और छोड़ें.
- 5 अपने फोन को सुरक्षित रूप से हार्डवेयर निकालें चिह्न पर क्लिक करके सुरक्षित रूप से निकालें.

# कनेक्टिविटी

**नोट :** यह फंक्शन Macintosh कंप्यूटर के लिए उपलब्ध नहीं है।

## PC सूइट—अपने फोन को अपने PC से सिंक्रनाइज करें.

आप अपने फोन को अपने PC से सिंक्रनाइज करके यह सुनिश्चित कर सकते हैं कि न केवल आपके सभी महत्वपूर्ण विवरण और दिनांक मेल खाएँ, बल्कि अपनी फाइलों का बैकअप लेकर चिंतामुक्त भी हो सकते हैं.

## आपके कंप्यूटर पर LG PC स्थापित करना

- 1 [www.lgmobile.com](http://www.lgmobile.com) पर जाएँ और पहले मध्य पूर्व चुनें और तब अपना देश चुनें.
- 2 मैन्युअल और सॉफ्टवेयर का चयन करें और मैन्युअल और सॉफ्टवेयर को डाउनलोड करने के लिए LG मोबाइल समर्थन उपकरण अनुप्रयोग क्लिक करें, हॉ क्लिक करें और LG PC सूइट इंस्टॉलर तब दिखाई देगा. (Windows XP, Windows Media Player इत्यादि).
- 3 वह भाग चुनें, जो आप चाहते हैं कि इंस्टॉलर चलाए और ठीक क्लिक करें.
- 4 LG PC Suite इंस्टॉलर विजार्ड पूर्ण करने के लिए स्क्रीन पर दिए गए निर्देशों का पालन करें.

5 स्थापना पूर्ण होने पर, आपके डेस्कटॉप पर LG PC नपजम चिह्न दिखाई देगा.

## अपने फोन और PC को कनेक्ट करना

- 1 अपने फोन और PC से अपने USB केबल को कनेक्ट करें.
- 2 डिवाइस में पॉपअप मेनू से PC सूइट का चयन करें.
- 3 अपने डेस्कटॉप पर LG PC सूइट चिह्न पर डबल क्लिक करें.
- 4 कनेक्शन विजार्ड पर क्लिक करें तब USB क्लिक करें.
- 5 अगले पर क्लिक करें तब फिर से अगले तब समाप्त पर क्लिक करें. आपका फोन और PC अब कनेक्टेड हैं.

## अपने फोन की जानकारी को बैक अप और पुनर्स्थापित करना

- 1 डिवाइस से USB केबल को अनुलग्न करें और स्क्रीन पर PC सूइट का चयन करें.
- 2 बैकअप चिह्न को क्लिक करें और बैकअप या पुनर्स्थापित करें का चयन करें.
- 3 आप जिस सामग्री को बैकअप या पुनर्स्थापित करना चाहते हैं उसे चिह्नित करें. उस स्थान का चयन करें जहाँ आप बैकअप जानकारी को चाहते हैं



या जहाँ से जानकारी को पुनर्सथापित करना चाहते हैं. ठीक क्लिक करें.

4 आपकी जानकारी बैकअप की जाएगी.

### अपनी फोन फाइलों को अपने पीसी पर देखना

1 डिवाइस से USB केबल को अनुलग्न करें और स्क्रीन पर PC सूट का चयन करें.

2 सामग्री चिह्न पर क्लिक करें.

3 अपने अपने फोन पर जिन सभी दस्तावेज, फ्लैश सामग्रियाँ, छवियाँ, ध्वनि और वीडियो को सहेजा है, LG फोन फोल्डर में स्क्रीन पर प्रदर्शित किए जाएँगे.

**TIP!** अपने फोन की सामग्री को अपने PC पर देखना आपको फाइलों को व्यवस्थित करने, दस्तावेजों को संगठित करने और अब जिस सामग्री की आवश्यकता न हो उसे हटाने में मदद करता है.

### आपके संपर्कों को सिंक्रोनाइज कर रहा है

1 डिवाइस से USB केबल को अनुलग्न करें और फोन स्क्रीन पर PC सूट का चयन करें.

2 संपर्क चिह्न पर क्लिक करें.

3 आपका PC अब USIM कार्ड और हैंडसेट पर सहेजे गए सभी संपर्कों को आयात करेगा और प्रदर्शित करेगा.

4 फाइल पर क्लिक करें और सहेजें का चयन करें. अब आप वहाँ चयन कर सकते हैं जहाँ आप अपने संपर्कों को सहेजना चाहते हैं.

**नोट** आपके USIM कार्ड पर सहेजे गए संपर्कों का बैकअप लेने के लिए, अपने PC की बाईं ओर SIM कार्ड फोल्डर पर क्लिक करें. स्क्रीन के सबसे ऊपर संपादन करें का चयन करें, फिर सभी का चयन करें. अपने संपर्क पर राइट-क्लिक करें और संपर्क के लिए प्रतिलिपि का चयन करें. अब आपकी स्क्रीन के बाईं ओर हैंडसेट फोल्डर पर क्लिक करें और आपके सभी नंबर दिखाई देंगे.

### आपके संदेशों को सिंक्रोनाइज करना

1 डिवाइस से USB केबल को अनुलग्न करें और स्क्रीन पर PC सूट का चयन करें.

2 संदेश चिह्न पर क्लिक करें.

3 आपके सभी PC और फोन संदेश आपके स्क्रीन पर फोल्डर में प्रदर्शित किए जाएँगे.

# कनेक्टिविटी

- 4 संदेशों को संपादित करने और पुनर्व्यवस्थित करने के लिए अपने स्क्रीन के शीर्ष पर उपकरण पट्टी का उपयोग करें.

## फोन सॉफ्टवेयर अद्यतन

### वेब साइट LG मोबाइल फोन सॉफ्टवेयरपर नवीनीकरण

अधिक जानकारी के लिए और इस फंक्शन के उपयोग के लिए, LGmobile.com साइट पथ पर पधार: <http://www.lgmobile.com> – देश – मैन्युअल और सॉफ्टवेयर बैनर का चयन करें

यह सुविधा आपको आपके सॉफ्टवेयर को नवीनतम संस्करण से नवीनीकृत करने और हमारे सेवा केंद्र पर जाने की आवश्यकता के बिना इंटरनेट पर सुविधाजनक रूप से नवीनीकृत करने की अनुमति देता है.

जैसा कि मोबाइल फोन सॉफ्टवेयर नवीनीकृत को नवीनीकृत प्रक्रिया की अवधि के लिए उपयोगकर्ता के पूर्ण ध्यान की आवश्यकता होती है, कृपया आगे बढ़ने से पहले दिखाई देने वाले प्रत्येक चरण के लिए किसी भी निर्देश और नोट की जाँच करने के लिए आश्वस्त हो लें. कृपया नोट करें कि नवीनीकृत के दौरान USB डेटा संचार केबल या बैटरी को निकालना

आपको मोबाइल फोन को गंभीर रूप से क्षतिग्रस्त कर सकता है. कानून द्वारा स्वीकृत सीमा तक, निर्माता नवीनीकृत प्रक्रिया के दौरान डेटा गुम होने के लिए कोई उत्तरदायित्व नहीं लेता है. आपको सुझाव दिया जाता है कि सुरक्षित रखरखाव के लिए किसी भी महत्वपूर्ण जानकारी की अग्रिम बैकअप रखें ताकि सॉफ्टवेयर नवीनीकृत व्यक्तिगत डेटा के हटाने का परिणाम न हो सकें.

# सहायक सामग्री

ये एक्ससरीज आपके GU285 के साथ दी गई थीं।

## चार्जर



## उपयोगकर्ता मार्गदर्शिका

अपने GU285 के बारे में अधिक जानें.

## बैटरी



### नोट

- हमेशा प्रामाणिक स्ल सहायक उपकरणों का उपयोग करें. ऐसा नही करने पर आपकी वॉरंटी अमान्य हो सकती है.
- सहायक उपकरण भिन्न क्षेत्रों में भिन्न हो सकते हैंय कृपया आगे की क्वेरीज के लिए हमारी क्षेत्रीय सेवा कंपनी या एजेंट के लिए जाँच करें.

# तकनीकी डेटा

## सामान्य

उत्पाद का नाम : GU285

सिस्टम : GSM850 / E-GSM900 / DCS1800 / PCS1900 / WCDMA

## परिवेश का तापमान

अधिकतम : +55°C (डिसचार्जिंग) +45°C (चार्जिंग)

न्यूनतम : -10°C

## Declaration of Conformity



### Suppliers Details

Name

LG Electronics Inc

Address

LG Electronics Inc, LG Twin Towers 20,  
Yeouido-dong, Yeongdeungpo-gu, Seoul, Korea 150-721

### Product Details

Product Name

GSM 850 / E-GSM 900 / DCS 1800 / PCS 1900 Quad Band and WCDMA Terminal Equipment

Model Name

GU285

Trade Name

LG

# CE 0168

### Applicable Standards Details

R&TTE Directive 1999/5/EC

EN 301 489-01 V1.6.1, EN 301 489-07 V1.3.1  
EN 301 489-17 V1.2.1, EN 301 489-24 V1.4.1  
EN 301 511 V9.0.2  
EN 301 908-1 V3.2.1 EN 301 908-2 V3.2.1,  
EN 300 328 V1.7.1  
EN 50360:2001/EN62209-1:2006  
EN 60950-1 : 2001

### Supplementary Information

The conformity to above standards is verified by the following Notified Body(BABT)

BABT, Forsyth House, Churchfield Road, Walton-on-Thames, Surrey, KT12 2TD, United Kingdom  
Notified Body Identification Number : 0168

### Declaration

I hereby declare under our sole responsibility that the product mentioned above to which this declaration relates complies with the above mentioned standards and Directives

Name

Seung Hyeon, Ji / Director

Issued Date

16.Oct. 2009

European Standard Center  
LG Electronics Logistics and Services B.V.  
Veluwezoom 15, 1327 AE Almere, The Netherlands  
Tel : +31 - 36-547 - 8940, Fax : +31 - 36 - 547 - 8794  
e-mail : jacob @ lge.com

  
Signature of representative

# LG Mobile



## WARRANTY CARD



This LG handset and charger comes with a 12-month warranty from date of purchase or 15 months from manufacturing date of corresponding IMEI No. Of the unit whichever is earlier, against defect in material or workmanship. In case of a defect, LG Electronics India Pvt. Ltd. undertakes to get the set repaired free of charge through its authorised service centre (ASC) or service dealer subject to following conditions:

### Terms and Conditions

1. This warranty is applicable to the first purchase and in no case it can be transferred or extended.
2. Repair of this product will be carried out on a carry in basis to the nearest ASC.
3. While the company will make every effort to carry out repairs at the earliest, it however is made explicitly clear that the company is under no obligation to do so in a specified period of time.
4. The company or its authorised ASC/ service dealer reserves the right to retain any parts of the component/s replaced at its discretion. In the event of a defect being noticed in the equipment during the warranty period.
5. This warranty entitles the purchaser to free of cost repairs of the unit within warranty period and does not entitle for replacement or refund of entire unit. Claims, if any, to this warranty shall in no case exceed the purchase price of the unit.
6. In case of any software upgradation of the phone, no warranty is provided on phone memory or phone book.
7. The warranty is void in case the serial no./ IMEI no. is tampered / disfigured or details in the warranty card are not properly filled up at the time of purchase.
8. This warranty is not valid for damages resulting due to negligence, mishandling, improper use, tampering, breakage, soaking, fire, unauthorised repair and failure due to network upgrades.
9. Batteries are covered under warranty for a period of 6 months from date of purchase or 9 months from date of corresponding IMEI no. of the unit whichever is earlier
10. Warranty does not cover accessories external to the equipment supplied by the dealer.
11. The Delhi / New Delhi courts shall have the jurisdiction to try any dispute and /or suits related to or arising out of this agreement.

### Customer Information Center/ Call Center Number

For any query related to the after sales service and customer support please contact us at the numbers listed below.

	<b>SERVICE</b>
	<b>1800-180-9999*</b>
<small>*MTNL / BSNL</small>	<b>39-01-0909**</b>
<small>**Prefix STD Code</small>	

## BRANCH ADDRESSES

S. No.	Branch	Branch Office Address	STD Code	Phone No.
1	Ahmedabad	LGEIL 233-234 Platinum Plaza, Judges Bungalow Road, Bodakdev Road, Ahmedabad - 51	079	4004013 / 14
2	Asansol	LGEIL Block-E Ist Floor, P.C Chattarjee Market, Rambandhu Tala, GT Road (E) Asansol - 713303	0341	3292009 / 3292010
3	Aurangabad	LGEIL 302 CIDCO No 3, Opp Hotel Ramgiri, Jalna Road, Aurangabad - 431003	0240	2474055 / 32095436 / 32095437 / 32095438
4	Bangalore	LGEIL No. 914, 2nd Floor, Sri Venkateshwara Complex, Opp. ISP Petrol Bunk, 80th Road, 6th Block, Koramangala - Bangalore - 560095	080	41145145 / 41144750 / 41144751 / 30910754 / 30910753
5	Bhopal	13A Vignes Warehouse Corporation, Sector-G Govindpura Industrial Area J K Road Bhopal	0795	4062900 / 3092938 / 3995904
6	Bhubaneswar	LGEIL Plot No.02 1st Flr. Bagaji Nagar, Bhubaneswar - 751009	0674	2531430 / 2534280 / 3966525 / 3966526
7	Chandigarh	LGEIL, SCO No. 142-143, 3rd Floor, Sector-34A Chandigarh - 160002	0172	5087389 / 90 / 5089107 / 3256001 / 3256003
8	Chennai	LGEIL, AA11, 2nd Avenue, Fatima Tower, Anna Nagar West, Chennai - 600040	044	65510501 - 04
9	Cochin	LGEIL, 401/270, Vasudeva Buildings, T.D. Road, Ernakulam Cochin - 682011	0484	3269743 / 2370744 / 2370484 / 4027444 / 4027555
10	Coimbatore	LGEIL, 250a, Sangarur Main Road, Kannappa Nagar, Coimbatore - 641027	0422	2332197 / 2332195 / 2332506 / 3094613 / 3094573
11	Dehradun	LGEIL, M - 22, Mobbewala, Tata Commercial Compound, Dehradun Saharanpur Road, Dehradun	0135	2644213 / 283
12	Delhi	LGEIL, A-27, Mohan Co-operative, Industrial Estate, New Delhi	011	2699411 / 12 / 13
13	Ghaziabad	LGEIL, J-10, RDC Rajnagar Ghaziabad - 201001	0120	9811354152 / 3 / 64 / 85
14	Goa	LGEIL, Plot No-D-3M0-4, Rego Baug, Alto Santacruz, Bambolim, Goa - 403	0832	3294955 / 3294959 / 3294799
15	Gurgaon	LGEIL, II nd Flr A Block, Centre Point Bldg, Sushant Lok, PH, Gurgaon - 122001	0124	4047461 / 62 / 63 / 4272867 / 4047460
16	Guwahati	LGEIL, Shantiner Bhawan, C K Agarwal Path, Chenikuria, Guwahati - 781003	0361	2663865 / 2666959 / 2665583 / 2668984
17	HUBLI	LGEIL, 603/B, Raii Nagar Road, Behind Renuka Petrol Pump, Golur Road, Hubli - 580030	0836	4250251 / 52 / 2337251 / 52
18	Hyderabad	LGEIL, 1st Floor, Survey No.54, Pulla Reddy building, Vikarampuri Main Road Kharkhana, Secunderabad - 500004	040	27811732 / 33 / 34
19	Indore	LGEIL, 3rd flr, 304 Bansri Trade Centre 581/5 M.G.Road, Indore - 452003	0731	4049523 / 24 / 40822157
20	Jaipur	LGEIL, B-71, Sahakar Marg, Lal Kothi Scheme, Jaipur - 302015	0141	5111118 / 5113028 / 5105302
21	Jalandhar	LGEIL, Village Khajuria Near Hawali Restaurant, Jalandhar, Phagwara Highway, G T Road, Jalandhar	01824	502867 / 506025 / 502868
22	Jammu	LGEIL, Plot No. -52 Yard No. 6, Transport Nagar, Narwal, Jammu - 180006	0191	2477420 / 2477419 / 2474386 / 2474384
23	Jodhpur	LGEIL, Z21-A/212-B/2, RIICO Heavy Industrial area, Jodhpur - 342003	0291	2742384 / 302
24	Kolkata	LGEIL, 1, Ho-Chi-Min-Sarani, 6th Floor, Metro Towers, Kolkata - 700071	033	22883250 / 51 / 52
25	Kundli	LGEIL, Sunshine Enterprises, Sunder Cold Storage, Gt Karnal Road, Kundli - Sonapat	0130	2219201 / 02 / 03
26	Lucknow	LGEIL, B-537, Hari Kuri, Keshav Nagar, Sitapur Road Lucknow - 226020	0522	2757538 / 39 / 2759121
27	Ludhiana	LGEIL, Village Jhande Near Badowal Railway Station Opp ferozpur Road Ludhiana	0161	2804413 / 19
28	Mumbai	LGEIL, Trade Star, 4th Floor, A Wing, J B Nagar, Andheri Kuria Road, Andheri (E) Mumbai - 400059	022	2635282 - 2897
29	Nagpur	LGEIL, Sa, Road No.13, Behind Merit Workshop, MIDC Hinga, Nagpur - 440016	07104	2361200 / 235122
30	Patna	LGEIL, 2nd Floor, Ankit Chandra Deep Complex, Bandar Bageecha, Near Samrat Hotel, Patna - 800001.	0612	3209156
31	Pune	LGEIL, 105/106, Premium Point, GMI Road, Opp Modern High School, IIIrd Floor, Shivaji Marg, Pune - 411005	020	66030100 / 732
32	Rajpur	LGEIL, Nathani Compound, Shyam Nagar, Katora Talab, Rajpur (C.G)	0771	4053171 / 4037470 / 4048745
33	Ranchi	LGEIL, 402, Commerce Tower, Opp. Gel Church Complex, Main Road, Ranchi	0651	3294026 / 2331815 / 3090428
34	Surat	LGEIL 1001-1004, Acon Plaza, IInd Flr, Anand Mahal Road, Behind Bhulka Bhawan School Adajan, Surat - 395000	0261	2730982 / 83 / 84
35	Thane	LGEIL, Gali Shop No - 296/207, 2nd Floor, Sai Plaza, Above Vijay Sales Opp. Cine Wonder Mall, Ghodbunder Road, Thane(West) - 400607	022	25472633 / 2637
36	Varanasi	LGEIL, Pama Complex, DUW, Lahartara Road Shivdaspur, Manduadih, Varanasi UP - 221002	0542	2373432 / 36 / 37
37	Vijaywada	LGEIL, Door No 32-21-7, Ratanambada Street, Prajapati Nagar, Vijaywada - 520010, Andhra Pradesh	0866	2407203 / 87
38	Warangal	LGEIL, HOUSE NO. 1-9-589/1 FIRST FLOOR, BESIDE HDFC BANK NAKKALGUTTA, HANAMAKONDA-506011 (WARANGAL)	0870	2551453

Dealer name with Stamp ..... Dealer address .....

IMEI No. .... Date of sale ..... Serial no. ....

LG Electronics India Pvt. Ltd., Plot No. 51, Udyog Vihar Surajpur Kasna Road, Greater Noida, U.P.

**UNITED INDIA INSURANCE CO. LTD.**  
**D.O.-VI, 5th floor Skylark Building, 60 Nehru Palace,**  
**New Delhi-110019**

TO

UNITED INDIA INSURANCE CO. LTD.

DATE...../...../.....

D.O.-VI, 5th Floor Skylark  
Building,60 Nehru Palace,  
New Delhi-110019

Dear Sir,

RE: Loss of mobile phone no.: .....

MAKE .....MODEL .....

This is to inform that my mobile phone has been lost due to theft on  
.....at.....FIR/DD entry has been lodged  
with ..... Police Station. I am enclosing the Claim  
Form cum Bill along with required documents for settlement of the claims.

Thanking you

Yours Sincerely,

Signature of the Insured

Name

## CLAIM FORM CUM CLAIM BILL

To be filled in by the ultimate consumer

Name

Present Address

Tel. No.

Make & Model of the Handset

Invoice No.  Date of Purchase

Dealer Name

Address

Tel. No.

IMEI No.

Date of Theft  Time

Place of Theft

Details of Theft

FIR No./DD No.  Date

Police Station

Amount Claimed

Block the SIM Card within 3 days YES  NO

DATE

PLACE

SIGNATURE OF CUSTOMER

### TERMS AND CONDITIONS:

#### POLICY COVERAGE

1. Theft coverage of LG GSM HANDSET for one year from the date of purchase/invoice only. No other loss covered.
2. Offer applicable on all purchases made from 1<sup>st</sup> April 2009 to 31<sup>st</sup> March 2010 under policy No. 040600/46/09/39/00000002. Dt: 01/04/09 to 31/03/2010
3. Only theft registered under section 379 IPC or theft reported under Daily Dairy with Police FIR is covered.
4. Reimbursement will be subject to following depreciation/ deduction on the invoice value from date of purchase:
 

Handset upto 3 months old	-10%
More than 3 months upto 6 months	-15%
More than 6 months upto 9 months	-25%
More than 9 months upto 12 months	-35%



## **CLAIM PROCESSING DOCUMENTS**

In the event of handset loss, the buyer should follow the understated procedure:

- a) (i) Lodge FIR under Section 379 IPC or theft to be entered in Daily Dairy with the Police Station in whose jurisdiction the theft occurred within 24 hours of occurrence of the same.
- (ii) Block the SIM Card with your service provider within 3 days.
- (iii) Send information to the insurance company within 7 days of the loss.
- b) Documents required:
- (i) Original Invoice & Cash Memo.
- (ii) Original certified copy of DD/FIR u/s 379 by the police authority.
- (iii) Translation of vernacular documents in English/Hindi.
- (iv) Complete claim Form cum Bill and Discharge Voucher.

These documents should be sent to the Policy Issuing Office within 7 days of the loss by regd. post/courier. All document to be submitted in English/Hindi language. The company reserves the right to call for any other necessary document in addition to the documents listed above.

Subject to all the conditions being fulfilled, claim will be settled within 15 days of our receipt of the above documents.

Deduction of Rs. 350/- will be applicable towards accessories.

**Note:** In case the handset cost is more than Rs. 20,000/-, a survey is required. Contact nearest office of United India Insurance Co. Ltd. for survey.

For any future queries assistance related to the policy exclusion and claim settlement you may write to United India Insurance Co. Ltd., D.O.-VI, 5th Floor Skylark Building, 60 Nehru Palace, New Delhi -110019. Tel. no. 011-26439984, 26452631. Fax no: 011-26413031.



---

### DISCHARGE VOUCHER

Received from United India Insurance Co. Ltd. under Policy No. .... in full and final discharge of our claim, the sum of ..... (in words) Rs. ....


Signature of Insured /Customer  
across revenue stamp

Affix Re.1 revenue stamp

Date:

Place:

## SERVICE CENTER LIST

	<b>SERVICE</b>
 <small>*MTNL / BSNL **Prefix STD Code</small>	<b>1800-180-9999*</b> <b>39-01-0909**</b>

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Adhoni	RS CDMA	21/490, Arts & Science College Road, Near Devi Nursing home, Adhoni-518301	9346490905	McMohan
Andhra Pradesh	Adilabad	Kiran Mobile World	7-14-78/A, Near Nethaji Chouk, Cinema Road, Adilabad-504001	9346358181	McKiran Kumar
Andhra Pradesh	Amalapuram	Sandesh Cellular	D.No-4-2-14, Opp: S.K.B.R Collage AMLAPURAM-535201	9346398838	McRavi Kumar
Andhra Pradesh	Ananthapur	RK LG CDMA	Shop No 3, Cellular, Pallavi Towers, Opp to Canara Bank, Subash Road, Ananthpur-515001	241450,	Mc Sridhar
Andhra Pradesh	Armoor	Sai Sri Electronics	Shop.no:2, mahalakshmi road, Armoor - 503224	9392622038	McSrinivas
Andhra Pradesh	Bapatla	Vijaya Communications	Opp: Old Indian Gas Company, Sikaram Vari Street, G.B.C.Road, Bapatla	9346206305	McB.Siva
Andhra Pradesh	Bhimavaram	Gopi Krishna Communications	JP Road Near Mohan Service Center Bhimavaram Pin-534202	9394071036	McSiva
Andhra Pradesh	Chirala	Lakshmi Infocomm	Shop No.17&18 Banam Plaza, Munthavari Centec Chirala-525155	326000	Ms.Shakeena
Andhra Pradesh	Chittoor	CMT Computer Services	18-162, High Road Opp.Bishnu Bhavan Hotel, Chittoor	222733	McGopi
Andhra Pradesh	Cuddapah	Srinivasa Communication	Shop No.4, Siddapriya Complex, Opp. HP Petrol Pumping Point, Cuddapah	9346350224	McSahadeva Reddy
Andhra Pradesh	Dharmavaram	Siddharta Communications	Opp to Sathya Lodge, NPR Circle, Dharmavaram	9347064101	McShiva Ramkrishna
Andhra Pradesh	Eluru	S.S.Computers	DoorNo:238-4-8/3, Ayyapa Complex, Beside Kanuri Madhavi Hospital, Subbama Devi School Road, R.R.Pet, Eluru-534002.	329294	McDiwaker
Andhra Pradesh	Guduvada	Kanakadurga-commanactions	Opp: Alankar Family Restaurant, Eluru Road, Nehru Chowk Center Guduvada	9394220688	McKumar
Andhra Pradesh	Gudur	Srinivasa Electronics	1st floor, Airtel Building, Kumhari Veedhi, Gudur - 524101, Nellore (Dt).	645644	McSuman
Andhra Pradesh	Guntur	Vasavi Associates	Door No.6-7-36, V.S.N.Complex, 8th Line, Arundelpet, Guntur-522 002.	3257789	McSatyam

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Hazuragar/ Kodad	Sri Pavan Electronics	Malika Towers, Besides Reliance Web World, Kodad - 508206	9346901519	Mr Narasimha Rao
Andhra Pradesh	Hindupuram	S.VA Cellular	Shop.no:3, Vinayaka Lodge, Railway Road, Hindupur - 515201	320777	Mr.D.B.Ravindra Nath
Andhra Pradesh	Huzurabad	Bhargavi Communications	Shp No E-2, DCMs Complex, Near Bus Stand, Main Road, Huzurabad-505122	9391755619	Mr.T.Vishnu Vardhan
Andhra Pradesh	Hyderabad	Bhagya Communications	Shop no:109, Upper Ground Floor, # 12-2-825, S.G.M. Mall, Mehdiapatnam, Hyderabad-500028.	32972308 / 32001406	Mr.Suresh
Andhra Pradesh	Hyderabad	JVR Communication	Shop No.8, Vanija Vihar, Nalanda Building, Dilukh Nagar Main Road, Hyderabad- 5000060	66109604	Mr.A.Venket nariyan reddy
Andhra Pradesh	Hyderabad	Primus Infomatic & Software Pvt Ltd	# 18/A, Methodist Complex, 5-9-190, Lane Opp to Chermas, Abids, Hyderabad	66755111	Mr.Govind Kabra
Andhra Pradesh	Hyderabad	LG Direct Service Centre	MCH No 6-3-852/3/A Ground floor, Vishwa Central, Nizamia Observatory Road, Ameerpet Hyderabad	40033769 / 70	Mr.Tarun Dandavate
Andhra Pradesh	Hyderabad	Reliable Communication	G-8, 3-6-561, AALTO'S A & M Trade Centre, HIMAYATNAGAR, HYDERABAD - 500029	9346320705	Mr.Sandeep Soni
Andhra Pradesh	Hyderabad	S V Electronics	Shop No. 41, Nilagiri Block, Aditya Enclave, Ameerpet Main Road, Hyderabad-500038	9346449323	Mr.Pradeep
Andhra Pradesh	Hyderabad	Shweta Communications	Shop No.9, Ground Floor, Pavani Anusya Complex, Opp. Huda Complex, Tamaka, Hyderabad	32968162	Mr. Sandeep Heda
Andhra Pradesh	Hyderabad	Shweta Computers	# 1-7-69/1 & 2, OPP Aditya Delux Hotel, Near Paradise circle, Sarojini Devi Road, Secunderabad - 500003	27721076 / 32977548	Mr.Sandeep
Andhra Pradesh	Hyderabad	Sreenivasa Technologies	SAI VIKRAM TOWERS, SHOP NO -4, RELIANCE WEB WORLD BUILDING, Balaji Nagar Kakatpally	32961479	Mr.Praveen
Andhra Pradesh	Hyderabad	Sri Surya Communications	#Madhu Enclave, Street no 06, Shyamal Buildings, Begumpet, Hyderabad	32961127	Mr.Nageswara Rao
Andhra Pradesh	Hyderabad	Sri Varun Electronics	D.No 5-8-344/1, " DHAN BHAGYA ESTATE ", Chirag Ali Lane, Abids, Next to Raghava Ratna Towers, Hyderabad - 500 001	32900909 / 55781999	Mr.Alok Mohan
Andhra Pradesh	Hyderabad	Sunbeam Technologies	120, Chenoy Trade Centre, Parklane, Near Paradise, Secunderabad -500003	40200193 / 66383193	Mr.Suresh
Andhra Pradesh	Jagtial	SS Communications	Opp Kanti Bhavan Lane, Duwarka Nagar, Jagtial	9391535335	Mr.Hari
Andhra Pradesh	Jangaon	Sky Win Communications	#2-7-134, Beside Bharat Gas, Bus stand Road, Jangaon-506167.	9390102839	Mr. Varun

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Jangareddygudem	Sri Devi Communication	Near Gangalana Temple, Opp. Andhra Bank, Jangareddygudem	227297	Mr. Prasanna Lakshmi
Andhra Pradesh	Kakinada	Delta Infotech	Door No. 6-1-29, Opp. Swami Vivekananda Park, Jawahar Street, Surya Rao Pet, Kakinada - 533001	5593533	Mr. Shivanand
Andhra Pradesh	Kamareddy	Pager King Communication	Sircilla Road, Kamareddy, Dist. Nizamabad - 503 111.	9397366633	Mr. Moizuddin
Andhra Pradesh	Karimnagar	SS Marketers	2-8-40, Makarampura, Near Circus Grounds, Karimnagar	9391552223	Mr. Cheakradhar
Andhra Pradesh	Kavali	Sree Balaji Infotech	Prasad Complex Trunk Road, Near Ongole Bus Stand, Kavali	6329567	Mr. C. Sri Sai Charan
Andhra Pradesh	Khammam	Sriven Technologies	D.No:11-2-37, Shop No.3, D.V.Krishna Complex, Beside Baburao Petrol Bunk, Balaji Nagar, Wya Road, Khammam-507002	9396698866	Mr. Baskar Reddy
Andhra Pradesh	Kothagudem	S.Swathi CDMA Service Center	9-3-3, Above Sindhura Electronics, Near RTC BUS Stand, Kothagudem-507101	9391552228	Mr. Niaz Ahmed
Andhra Pradesh	Kuppam	Sagar Computer Services	14-204, PALACE ROAD, KLIPPAM-517425	9391862436	Mr. Sagar
Andhra Pradesh	Kurmool	R K LG CDMA	Shop no:26, 27, First floor, UCON Plaza, Kurmool-518001	220201	Mr. G Rama Krishna
Andhra Pradesh	Machilipatnam	Om Sree Sai Communications	25/276, Kota Vari Tulla Center, Jagannadapuram, Machilipatnam	9347741777	Mr. Rafee
Andhra Pradesh	Madanapalle	Sri Balaji Computers	Shop No:2, 1st floor, Sri sai Complex, CTM Road, Madanapally - 517325	9390025204	Mr. Manohar
Andhra Pradesh	Mahabubnagar	Sri Chakra Mobile Care Centre	Shop.no:15, Shareef Complex, Near Bus stand, Mahbubnagar - 509002	9396348999	Mr. Anil
Andhra Pradesh	Mancherial	SS CDMA Service Centre	Shop no.7, Mounika Complex, BPL Chourasta, Mancherial-504208	9394552223	Mr. Rajesh
Andhra Pradesh	Medak	Balaji Communications	Door no:1-3-77/5, Opp to State bank of Hyderabad, Main Branch, Main road, Medak	9346439961	Mr. Sudhakar
Andhra Pradesh	Medchal	Khan Electronics	Sanjeeva Reddy Complex, Besides RTC Bus Depot, Medchal - 501 401	9347222088	Mr. Jaleel Khan
Andhra Pradesh	Miryalguda	Needs Electronics	Jagannath Complex, Opp Bus Stand, Miryalguda - 508207	9394645696	Mr. Ravi Kumar
Andhra Pradesh	Nalgonda	Quintessence Electronics	Shop No -5, Srinivasa complex, Opp to market office, HYD road, Nalgonda - 508001	9396610220	Mr. Venkateswar Rao
Andhra Pradesh	Nandyal	Dhanush Systems	Dno:25/165 B, Sanjeev Nagar, Near Ramalayam, Nandyal	9392236699	Mr. Ramesh
Andhra Pradesh	Narasaraopet	Rajendra Infotech	D.No -90-11-10/7, Saradhamba Complex, Arundelpet, Near S.B.I ATM Narasaraopet	224136	Mr. Sasi Bhushan

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Nellore	Balaji Watch & Electronics	16/249, Trunk Road, Nellore-524001	2339999	McRajesh
Andhra Pradesh	Nellore	Tirumala Electronics	Shop No. 26, 1st Floor, Co-Operative Bank Complex, Near Gandhi Statue, G.N.T. Road, Nellore	3290339	McPratap
Andhra Pradesh	Nimal	Om Sai Electronics	Shop.no:1, Kala Nagar road, Beside 2 town Police station, Nirmal - 504106	9390000024	McMahendar
Andhra Pradesh	Nizamabad	Satya Electronics	# 7-10-65, Shop no 1, 1 st floor, H.M.H.V Complex, Beside Bus Stand, Nizamabad-503001	326000	McVenu gopal
Andhra Pradesh	Ongole	Tejasri Communications	37-1-107, Opp: Kerala Bakery, Near Mastan Darga Center, Trunk Road, Ongole	9393026115	McSasi Bhusan
Andhra Pradesh	Peddapalli (Ramagundam)	Abhi Marketers	Shop No:19/8/291, MRK Plaza, Lakshmi Nagar, Godhavari Khani - 505209	9399987773	McNagaraj
Andhra Pradesh	Peddapuram	Devi Infotech	Opp. Veterinary Hospital, Shop No. 1, Santa Market Road, Peddapuram	6593533	McSiva Kumar
Andhra Pradesh	Prodattur	SV Technologies	4-625-3, Gandhi Road, Opp Karur Vysya Bank, Produttur	9347251806	McRavi Kumar
Andhra Pradesh	Rajamundry	Siri Infotech	Police Welfare Complex, City Hospitals Junction, Damai Pet Main Road, Rajahmundry	9397925799	Mr Raghvendra
Andhra Pradesh	Raychoti	Raju Computer World	Room No 3 Up Stairs Syyedia complex, bustand road, Rayachoty	9346209881	McRaju
Andhra Pradesh	Repalle	Sri Satya Solutions	D.no- 10.14.125 (LIP Stairs) Municipal Office Road, Railpet, Repalle-522265	9396222993	McSridhar
Andhra Pradesh	Sangareddy	Sri Technologies	Srimaan Complex, Beside Inspection Bunglow, Main Road, Sangareddy-502001, Medak Dist	9391216573	McAjaz Ahmed
Andhra Pradesh	Sattenapalli	S.S.Communications	Opp.Telephone Exchange, Sattenapalli	9397610550	McSai
Andhra Pradesh	Shad Nagar	Sri Cana Electronics	Shop No : 2, Khaja Veeresam Complex, College Road, Shadnagar - 509216	9392633111	McVigneswar
Andhra Pradesh	Siddpet	Gopala Krishana Communications	SHOP NO:13, FIRST FLOOR, MACCA COMPLEX, . OPP-CITIZEN'S CLUB, M.G ROAD, SIDDIPET - 502103, (A.P)	9392511064	Mc Nagaraj
Andhra Pradesh	Srikakulam	Venkateshwara Infotech	Raja Commercial Complex, Opp.Electrical Office, Ground Floor, Shop No.10 & 11, GT Road, Srikakulam	324577	McKiran Kumar
Andhra Pradesh	Srikalahasti	KSV Computer Services	NNR Buildings, d.no:16-582, Panagal road, Srikalahasti 517644	9390044399	Mc Sahadeva Reddy
Andhra Pradesh	Sullurpet	Sai Baba Electronics	S.V.T Street, Opp: Reliance Office, Sullurpet	9346920527	Mc: S. Venkata Krishna

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Tadepalligudem	Sri HariPriya Infotech	Thota Gopi Complex, Police Quarters Lane, Beside Zp High School, Tadepalligudem	9346445720, 08818-210565	Mr.Suresh
Andhra Pradesh	Tanuku	Shivanand Enterprises	Door No. 34-3-3, Main Road, Gamini Compound, Tanuku	9346408640	Mr.Srinivas
Andhra Pradesh	Tenali	Vaishnavi Infotech	D.No:22/11/114, Opp. Kanikacharla Kalyanamandapam, Bose Road, Tenali.	9347651330	Mr.Murali
Andhra Pradesh	Tirupati	CMT Communication	13-7-796/14/3, TUDA OFFICE Road, Tirupathi-517501	3296979	Mr.K Vasu Naidu
Andhra Pradesh	Vijayawada	K L Computer House	39-9-46, Svs Temple Street, Labbipet, Vijayawada	6520461	Mr.Kartik
Andhra Pradesh	Vijayawada	V V Communications	28-23-31/32, Opp.Swarugha Foods, Vijay Talkies Center, Vijayawada	320866-320988	Mr.Rahul
Andhra Pradesh	Vishakapatnam	Jai Bharani Communications	Door No:52-11-7/7, Saphagiri Plaza, Old Resuvanipallem, Vishakapatnam-13	6634666	Mr.PVenkatapathi Raju
Andhra Pradesh	Vishakapatnam	Sri Sai Ganesh Infotech	G5, Ground Floor, Backside of Sangam-Sarat Theatre, 1st Lane, Dwarika Nagar, Vishakapatnam - 530 016.	3258777	Mr.Chandra Shekar
Andhra Pradesh	Vizayanagaram	S R Technologies	D.No:1-9-1/44, Opp: Z.P Office, Railway Station Raod, Vizayanagaram.	9346418791	Mr.Balakrishna
Andhra Pradesh	Vuyyuru	Sugreeva Communications	Behind Datta Automobiles, Katturu Road, Vuyyuru	9393033355	Mr.Phani
Andhra Pradesh	Wanaparthy	Sri Ganesh Electronics	Shop No : 16-63, Opp R R Comex, Wanaparthy - 509103, Dist Mahabubnagar	9396800275	Mr Deva Raj
Andhra Pradesh	Warangal	S S Marketers	6-1-73/1, Sai Bhawan, Sridevi Theatre Road, Hanamkonda, Warangal-506001	2552223	Mr.L.Srinivas Rao
Andhra Pradesh	Zaheerabad	Renuka Technologies	Shop no:123/1, First Floor, Alpur, Zaheerabad.Pin-502220	316143	Mr.Abhiram Joshi
ASSAM	Gwahati	PRAGATI SERVICES	2nd Floor, Kiranhangsha Commercial Complex, Dr J.C. Das Road, Harisabha, Panbazar, Guwahati, Assam	2733501	Mr. Pradeep Khaitan
Assam	Silchar	IT ONLINE	NLS Avenue, Rangirkhari, Silchar, Cachar, Assam	221260	Mr.Sharma
Bihar	Arrah	Surya Services	Sushila Bhawan, Suryapuri colony, By pass road, Arrah	9334538845	Mr.Sanjay Kumar
Bihar	Begusarai	Krishna Communication	Eashwari Complex, Dak Bangla Chowk, Bishnupur, Begusarai, Bihar-851101.	9334341700	Mr.Dinkar Kumar
Bihar	Bhagalpur	Printronic Infosolutions	Ganpati Complex, 1st floor, Patel babu road	9934605864	Mr.Himansu Shekhar
Bihar	Bhagalpur	S.K.Communication	NEAR RAILWAY STATION, Super Market Complex, Patel Babu Road, BHAGALPUR-812002	9334255275	Mr.Kundan Kumar
Bihar	Biharsharif	Shanya Infotech	Magdha Commercial Complex, 1st.Floor, Shop.No.5, MG Road, Bharapur, Bihar Sharif, Nalanda Dist. Bihar.	9334048037	Mr.Amit Kanchan

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Bihar	Chapra	Ambey Associates	D-25, Hathwa Market, Chapra, Dist: Saran-841413 Bihar.	9334295605	McJyant Kumar
Bihar	Darbanga	Prime Computer	Hanuman Nagar, Doner Road, Darbanga.	9334934065	McAbhinav Kumar Verma
Bihar	Gaya	Louls Enterprises	Opp.Aviva Life Insurance, Kanya High School Road, Ramna, Gaya.	9334492033	McPankaj Ranjan
Bihar	Muzafarpur	Krish Enterprises	N:Kanhoulmaka.no.2, Kachisarai Road, Muzafarpur.	9304410745	McSanjeev Kumar
Bihar	Patna	Competent Mobile Service	Shop 1, Hotel Lalitha Complex, East Bowing Canal Road, Patna	9334027706	McMohit Ahluwalia
Bihar	Patna	Infotek Trading Company	1st floor, City Palace, New Dak Bunglow Road, Patna-800001	9334116145	McSanjay Choubey
Bihar	Patna	Micro Zone-Patna	A.H Complex, # G26, Near Kotak Mahindra Bank, Exhibition Road, Patna	3294696	McMithlesh Kumar
Bihar	Patna	Synergy Trading Company	G-01, Chanakya Plaza Complex, Main Road, Kankarabagh, Patna.8000020	2356900	McVikas Chandra
Bihar	Purnea	Micro Zone-Purnea	Narottam Hata, Opp.Dr:PCJHA, NH-31, Purnea-854326	9304166633	McAmit Kumar
Bihar	Sasaram	Nandika Enterprises	Hari Complex, Panjab National Bank, Sasaram, Rohtas-821115 (Bihar)	4222008	McAbhinav Gupta
Chattisgarh	Ambikapur	Neha Communication	Ramanuj Ganj road, Opp. Kosa Form, Ambikapur, Sarguja, Pin-497001	240427	McRishi Dubey
Chattisgarh	Bhilai	A B Automation	Shop no. 242, 1st floor Chouhan Plaza, CE Road, Supela Bhilai, Chhatisgarh- 490023	2295989	Mc Satish Singh
Chattisgarh	Bhilai	Sai Ram Electronics	SHOP-NO-52/90, HIMALAY COMPLEX, AKASH GANGA, SUPELA, BHILAI	4038917	Mc Balan
Chattisgarh	Bilaspur	Mahamaya Infotech	Shop No 203, Jain Plaza, Ground floor, Link Road, Bilaspur	2413865	Mc Pawan Kumar
Chattisgarh	Korba	Star Mobile Services	SS PLAZA, FD-13 POWERHOUSE ROAD, KORBA-495678	9304401485	Mc Anish Menon
Chattisgarh	Raigarh	Blue Chip Computer	Purana Sadar Bazaar, Raigarh, Chhatisgarh.	9977217776	Mc Ashok Agrawal
Chattisgarh	Raipur	Cybernet Systems	B-2, 1st Floor, Garchaz Complex, Jail Road, Raipur - 492001	406771	Mr Anand Singh
Chattisgarh	Rajnandgaon	Bhayee Services	SHOP NO 5, BELOW SBI STATE BANK OF INDIA, KAMPTEE LINE, RAJNANDGAON.	324200	Mc Manish Golcha
Delhi	New Delhi	Aegiss Infotech	UG-25, Ansal Chamber -2, 6, Bhikai Cama Place, New Delhi-110066	65477740	Mc Atul Gupta
Delhi	New Delhi	Arham Infotech Services	4737/A 23, Ansari Road, Daryaganj, Delhi-110002	41501124	Mc Anil Surana



STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Delhi	New Delhi	Comhard Systems	D-30, 31, First floor, Near Hotel Shipra, Main Vikas Marg, Lakshmi Nagar	32955887	Mr Ravi Kant Gupta
Delhi	New Delhi	Comhard Systems	B-120, Hardev Puri, 100 Feet Main Road, Near MTNL Office, Nathu Colony Chowk, Shahdri, New Delhi - 110 093.	32575507	Mr. Ravi Kant Gupta
Delhi	New Delhi	Comexions And Communications	183, Avtar Enclave, Opposite Nirula's, Pashchim vihar, New Delhi-110063	32451431	Mr. Bhupinder Agrawal
Delhi	New Delhi	Cube Engineers And Consultants Pvt Ltd	A-65, Naraina Industrial Area, Phase-1, New Delhi	65450272 / 41411620	Mr. Anvinder
Delhi	New Delhi	Elcom Trading Company Pvt. Ltd.	G-1, Goverdhan Building, 53-54, Nehru Place, New Delhi -110019.	64582709	Mr. Somesh Narang
Delhi	New Delhi	Innovative Telecom	304, GDITL Northex Towers, A-09, 3rd Floor, Northex Tower, Netaji Subhash Place, Pitampura, New Delhi-110 088.	32925753 / 65154340	Mr Manoj Garg
Delhi	New Delhi	Nice Telecom	15/19 & 15/21, DDA Complex, Nangal raya, Near D Block, Janakpuri, Delhi - 110046	9350863630	Mr. Ripul Garg
Delhi	New Delhi	Sukriti Communication	101 Patparganj- Mayur Vihar phase -1 - New Delhi -110091	32498011	Mr.Dipendra kumar chaturvedi
Delhi	New Delhi	Teletalk	C-21, First Floor, Near Bus Stand, Bhajan pura, Delhi-11053	9818400551	Mr.B.C.Vashist
Delhi	New Delhi	Touch Tone Telecom	B-52, First Floor, Kalkaji, New Delhi	32939031	Mr. Ashish Dey
Delhi	New Delhi	Ucom Technologies Pvt Ltd.	45, 1st Fl, Corner Mritk, Malviya Nagar, New Delhi - 110017	41745469	Mr. Neeraj
Goa	Margoa	SKY LARK	SHOP NO 05,CARVALHO APPTS, NEAR RAILWAY CROSSING, COMBA,	2736100	Mr.CHRIS
Goa	Panjim	Mandovi Mobiles	Mohidin Towers Da. No. A53 Opp to Hotel Manashanti Dadavaidya rd Panjim-403001	6452949	Mr. Prakash
Gujarat	Ahmedabad	A Com Technologies	Shop No-37, 1st Floor, Shubh Complex, Near Rajasthan Hospital, Camp Road, Shahibaug, Ahmedabad-380004	32940560	Mr. Vijay S.Gohel
Gujarat	Ahmedabad	Mishree Communication	FF-17, RUDRA SQUARE, OPP. JUDGES BUNGALOW, POLICE STATION, BODAKDEV, AHMEDABAD-54.	32508491	Mr. Mitesh Patel
Gujarat	Ahmedabad	Silicon Valley	9, Gokul Palace, Maninagar Cross Road, Maninagar Ahmedabad-380008	30225430	Mr. Rajesh Patel
Gujarat	Ahmedabad	Vision Communication	33, 1st Floor, Sukh Sagar Complex, Opp. Dinesh Chamber, Bapunagar, Ahmedabad -380024	65122322	Mr Ajay Kachhadija
Gujarat	Amreli	Precision Telecom	32, 33 Opera House, Station Road, Amreli	230940	Mr. Kamlesh Tank

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Gujarat	Ankaleshwar	Akshar Telecom	C/1 Keval Shopping Center, old National Highway No.8, GIDC, Ankaleshwar-393001	250860	Mrs. Anita Amin
Gujarat	Bharuch	Akshar Telecom	Pramukh Swami Complex, Panch Batti, Bharuch	2241027	Mr. Hanif Patel
Gujarat	Bhavnagar	Shivshruti Services	981/B, Makvana Building, Down Chowk, Bhavnagar -364001	3296222	Mr. P D Jala/ Sandeep Patel
Gujarat	Bhuj	Infotech Computer	2nd Floor, NarNarayan Chambers, Opp Indian Airlines Office, Station Road, Bhuj	324295	Mr. Vasant Meparani
Gujarat	Gandhidham	Vansh Electronics	Shop No. 35, Swami Vivekanand Complex, Near Oslo Circle, Gandhidham	232739	Mr. Siddarth Gajar
Gujarat	Gandhinagar	Creative Communications	Shop No 102, Suman City, Sector 11, Gandhinagar-382011	23226241	Mr. K.J.Barot
Gujarat	Himmatnagar	Jay Telecommunications	B-F 105, 1st floor, Durga Complex, Near Railway Station, Himmatnagar	329532	Mr. Manibhai Patel / Neeraj Patel
Gujarat	Jamnagar	Sudarshan Infosys	"Shradha", Park Colony, Motor House, Near axis Bank, PN.Marg, Jamnagar 361008	2552696	Mr. Amit Unadkat
Gujarat	Junagarh	K.J.Traders	29/30, Danapith, Junagadh	2627320	Mr. Paresh Rughani
Gujarat	Kalol	Maitree Communication	B/93, Yogi Complex, opp. Mahendra Mill Road, Kalol	325288	Mr. Jignesh Shah
Gujarat	Mehsana	Prime Computer Consumables	15-B, Vimal Super Market, B K Road, S.T.Workshop Road, Mehsana-384002	2325123	Mr. Suketu Patel
Gujarat	Morvi	Pulse Sales And Services	SHOP NO 6 MADHAV MARKET FIRST FLOOR NEAR NEW S.T.STAND SANADA ROAD Morvi-383641	9428565667	Mr. Natubhai Patel
Gujarat	Navsari	Deep Enterprise	10, Upper Level, Diamond Palace, Sayaji Road Sattapir, Navsari-396445	324095	Mr. Vinod Kasundra
Gujarat	Palanpur	Shree Manibhadra Mobile	21-First Floor, aroma arcade, opp jilla panchayat, near kozi tower, Palanpur-385001	300001	Mr. Panchal Sunil D
Gujarat	Patan	Able Infotech	9, Palika Bazar Complex, Rajmahal Road, Near Santokha Hall, Patan	9924256068	Mr. Rakesh Bhai
Gujarat	Porbandar	Varun Infotech	1ST Floor, Garden Cafe Building, Opp.New Fountain, N.oid R.T.O Office, Porbandar - 360575	3290285	Mr. Mitesh Chhangela
Gujarat	Rajkot	Joshi Telecom	Shop No.8, Kuber Complex, Opp Chandubhai Bhelwala, Dr Yagnik Road, Rajkot	6530707	Mr. Jiten Dave
Gujarat	Rajkot	Roopang Infocare	Vinod Nivas, 4, Sardarnagar(West), Nr Astron Cinema, Rajkot-360001	2464485	Mr. Kishore Patel

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Gujarat	Surat	Excel Solutions	H-3, Ruchi Flats, Near Iqara Building, Adajan Hazira Road, Surat-395009	6544500	Mr. Virender Jain
Gujarat	Surat	Om Sai Services	39, Golden Point, Near Science Laboratory, Ring Road, Surat	3231233	Mr. Dharmesh Patel
Gujarat	Surenranagar	Nihaal Computer Services	94 Old Housing Bord Opp Muni. Scool No.13, Surendranagar.	320375	Mr. Sikandar
Gujarat	Vadodara	Shreeji Telecom	5B-10, Windsor Plaza, R.C.Dutt Road, Alkapuri, Vadodara - 390002	9328093424	Mr. Jignesh Gohel
Gujarat	Valasad	Klassik Stationo Products	10, Jethalal Mulji Market, Halar Road, Valsad -396001	329363	Mr. Darshan Panchal
Gujarat	Vapi	Klassik Stationo Products	116, Bhanudarshan Co-Op Society, Koparli Road, Near Gunjan Cinema, GIDC, Vapi	3292363	Mr. Avishek Suhassaria
Gujrat	Anand	Zainee Mobile	2nd Floor, Limbawala Complex, Nr. CPO, Opp. Kavita Shopping Centre, Anand	9375960954	Mr. A. J. Raja
Haryana	Ambala	Bee Ess Air Communication	26 First floor MC Market Behind Negar Cinema Ambala Cantt-133001	4006229	Mr. Rajiv Gupta
Haryana	Bahadurgarh	Unique Telecom	Shop No.5, Rajaram Market, Main Najafgarh Road, Bahadurgarh, Near Bajaj Showroom	9315873676	Mr. Harinder
Haryana	Bhiwani	Sandeep Electronics	10 th Plot, First Floor, Circular road, Mahem Gate Chowk, Near Kaja's Nursing Home, Near Vodafone Office, Bhiwani, Haryana - 127021	252000	Mr.Sukhveer Sairi
Haryana	Faridabad	Comsoft Computers	601/1 Gopi Colony Chowk- Sector-19, Near Prem Prakash Ashram, OLD Faridabad-121002	4104252	Mr. Ashwani Jindal
Haryana	Faridabad	VR Infocomm	Shop No.44, Neelam Fly Over, Neelam Chowk, NIT Faridabad.	4031959	Mr. Vinod Kumar Gupta.
Haryana	Fatehabad	Sky Lark Mobile Point	4, G.T.Road, Near Bus Stand, Marla Colony, Fatehabad	989655244	Mr.Pankaj
Haryana	Gurgaon	Signature Communications	B-100 A, South City -1, Opposite - Huda Gymkhana Club Near Signature Tower - Gurgaon 122001	4102709	Mr. Raj Kumar Garg
Haryana	Gurgaon	Lalji Communication	SCO-31, - First Floor, Above MTNL Sanchar Haat, Main Market, Opp. BSNL Exchange, Sector-12A, OLD Gurgaon -122001.	3200900	Mr.Bharat Bhusan
Haryana	Gurgaon	LG Direct Service Centre	B-36, 37 & 38, Industrial Area, Mehrauli Gurgaon Road, Near Bata Chowk, Gurgaon - 122 001.	3027300	Mr.Deepak
Haryana	Hissar	Pamami Communication	32, Red square Market, Near Dena Bank, Hissar, Haryana-125001	9354332000	Mr.Pradeep Garg
Haryana	Jind	Gaurav Telecom	Shop No.19 Near Rani Talab, Near Bharat Electronics, Jind	325400	Mr. Deepak Garg
Haryana	Kaithal	Mahesh Communication	Shop no.22, Bajrang Bali Market, Near Randhir cinema- Kaithal	9315146000	Mr.Mahesh

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Haryana	Karnal	Mass Communication	Shop No.68, Main Market, Ground Floor, Moughal Canal, Karnal - 132001	3290717	McDavender Yadav
Haryana	Kurukshetra	Bharti Communication	3, Krishna Market, Opp.Purohit Sweet House, Pipli Road, Kurukshetra, Haryana-	9354165077	McVijay
Haryana	Narnaul	Prime Communication	Shop no.8, 1st Floor Taneja complex, near Nirula Hotel, Rewari/Road Narnaul	9355375351	McNaveen
Haryana	Palwal	Shree Ganesh Communications	Basant Apts, Shop No.5, Kithwari Chowk, Mathura Road, Near Saraswathi School, Palwal	321028	McHarish Chandra
Haryana	Panipat	INS Telecom	2, Bishan Sarup Colony, Opp Bus Stand, Near Hotel Deep, Panipat	9354917110	McPankaj kumar
Haryana	Rewari	Mahak Tele Services	53-A, Model Town, Near Shreeji restaurant, Rewari	329222	McGaurave Yadve
Haryana	Rohtak	Telecentre	13, Apna Bazar, Civil Hospital Road, Near Chhota Ram Chowk, Rohtak-124001	247242	McM.Madaan
Haryana	Sisa	Sisa Communication	168, Huda Complex, Old Bus Stand, Sisa	329591	McRajindera
Haryana	Sonipat	Teleworld	Shop No 20, 1st Floor, M.C.Market, Subhash Chowk, Sonipat, Haryana-138001	3290889	McVipin Dua
Haryana	Yamuna Nagar	Krishna Communication	Shop No.-24/75, Thapar Colony, OPPOSITE SWANTANTAR FANCY LADIES SUITS, NEAR FOUNTAIN CHOWK, YAMMUNAGAR HARYANA-135001	200610	Mc Harsh/Mc. Pradeep
Himachal Pradesh	Dharamshala	Deepsun	Near Sharma Studio, opp Mickey tour and travel, kotwali bazar Dharamshala, 176215	9318679122	McDeepak
Himachal Pradesh	Mandi	V.M.Communication	NEAR PNB MOTI BAZAAR, MANDI-175001	9318666005	McM Mahender Singh Thakur
Himachal Pradesh	Palampur	Electronic Home	Kallu Di Hatti, PO Maranda Thasil, Palampur, Distt-Kangra-176102	238463	McRavi Kumar
Himachal Pradesh	Poanta Sahib	Singal Marketing	Badri Nagar, Near LIC Office, Poanta Sahib	9318785134	McRajesh Singal
Himachal Pradesh	Shimla	Hanu Computers	76/ 9, 2nd floor Lower Bazar Shimla	2650560	McSandeep Patial
Himachal Pradesh	Solan	Vikas Mobile Repair Center	MOHAN COMPLEX, First Floor Upper Bazar-173212	9816271183	McVikas
Jammu & Kashmir	Jammu	Mobile Care	608-A Gandhi Nagar Behind Laxmi Narayan Mandir	2436814	Mc.Dixit Gupta
Jammu & Kashmir	Srinagar	The Net Surfer	2nd Floor Mohi-ud-Din Building, Polowiew, srinagar	2459549	McWasim
Jammu & Kashmir	Udhampur	Service Solutions	Ward No. 15 Shakti Nagar Opp. Old ITI Udhampur	276724	McRakesh

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Jharkhand	Bokaro	Digital Equipment Centre	GB-11, City Palace, Opp.Indian Bank, Bokaro.	9334072270	Mr.Dewashish Ojha
Jharkhand	Daltonganj	Maa Mobiles	Jail Road, Jail Hata, Dalton Ganj-822101	9304285663	Mr.Navin Kr. Kashyap
Jharkhand	Deoghar	Kanan Electronics	Hotel Relax Complex, BLC Road, Deogarh-814112	9304059528	Mr.Mahesh Sharma
Jharkhand	Dhanbad	Nimala Entreprises	Ground Floor, Muskan Complex, N-Subhash Chowk, Dhanbad.	9334027583	Mr.Niraj Sinha
Jharkhand	Godda	Karan Mobilink	Maa Kalyani, Katra, Main Market, Godda, Jharkhand-814133	9334449900	Mr.Sanjay Kumar Jha
Jharkhand	Hazaribagh	Digital Services	Plaza Mkt. pugmill road, N:Kallu Chowk, Hazaribagh.	9334599570	Mr.Shish Alam
Jharkhand	Jamshedpur	Prasad Electronics	N:Bus stand, Community Center, Kagal Nagar, Jamshedpur.	2226077	Mr.Rajo/ Saritha
Jharkhand	Jamshedpur	Tirupati Teletech	Chakravarti Compound, Near Hotel Castel, Contractors area, Bistupur, Jamshedpur-831001	3293331	Mr.Abhijeet Mukherjee
Jharkhand	Ramgarh	Shreyas Empire	Bus Stand Complex, Ramgarh-829122	9334085642	Mr.Piyush
Jharkhand	Ranchi	Balaji Infotech	Near Dr.Kashyap Eyeclinic, Purulia Road, Ranchi.	3205400	Mr.Sanjeet, Mr.Sunil Kedia
Jharkhand	Ranchi	Satya Systems & Solutions	158, Opp Hotel Palace, Kadru, Ranchi-834002	3291019	Mr.Amit Rastogi
Karnataka	Anekal	Sri Venkateshwara Communications	# 37, KSRTC COLONY, HOSUR MAIN ROAD, ANEKAL TALLUK, BANGALORE - 562106	320078	Mr.R.Jaganath
Karnataka	Bailhongal	3G Communication	Shop No 459\2 Near Inchal Cross Belgaum Road Bailhongal-591102	9343815097	Mr.Vishwanath
Karnataka	Bangalore	Ascent Communication	No.113, St Johns Church road, Bangalore - 560005	32914856	Mr.Kumaresan
Karnataka	Bangalore	CRYSTAL INFOCOM	SRILAKSHMI VENKATESHWARA COMPLEX, SHOP No. B-5, 33RD Cross, 11th Main, 4th Block Jayanagar, Bangalore-560010	32710202	Mr.Prasad
Karnataka	Bangalore	LG Direct Service Centre	No: 93, TKN Mansion, KH Road (Double Road), Bangalore	41145145 / 9739983435	Mr.Rajo Naik
Karnataka	Bangalore	Optima Mobile Services	24/2, Dr.Rajkumar Road, Near Subramanyagar Police Station, 2nd Block, Rajajinagar, Bangalore - 560 010	23131953 / 65722205	Mr.Umri Krishnan
Karnataka	Belgaum	Hello India Telecom	G-4, Maratha Mandir Complex, Khanapur Road, Near Railway Flyover, Belgaum - 590 001.	4211329 / 2420533	Mr.Mohan
Karnataka	Bellary	MAKAM ELECTRONICS	# 90 C/16 HIMALAYA BUILDING K.C.COLONY BELLARY 583101	655043	Mr.Krishna Murthy Makam

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Karnataka	Bhadravati	Digital Communication	SR Complex 4th cross B H Road Bhadravathi-577301	9341081291	McNagabushan
Karnataka	Bhatkal	Vijay Communication	Hussain Complex Bunder road Bhatkal - 581320	300027	McVittal H.Naik
Karnataka	Bidar	Mayuri Infotech	Ravi complex, shop no: 4, Udgir road, Bidar-585401	225544	McRavi Halhali
Karnataka	Bijapur	Turning Point Computers	Khed building, opp Vijaya college, Sholapur road, Bijapur-586103	329318 / 300005	Mc.S.M.Hiremath
Karnataka	Channapatna	C&C Technology	"Ramanujam Nilaya" No.2104, 11 th Cross, Kuvempunagar B M Road, Channapatna - 571501	7251716	Mc.Charan
Karnataka	Chikaballpur	Sri Ram Prasad Enterprises	1st Floor, BB Road, Beside State Bank of Mysore, Chikballapur-562101	325567	Mc.Vardharaj
Karnataka	Chikmagalur	Cell Tec Electronics	Ragavendra complex, NMC circle, Neharu road, Chikmagalur - 577101	9341013183	Mc.Prem Kumar
Karnataka	Chintamani	Amrutha Mobiles	# 5, Venkatadri Complex, M.G. Road, Opp to Adarsha Theater, Chintamani - 563125	9342262811	Mc.Sudarshan Reddy
Karnataka	Davangere	Kruthika Communication	Shop No: 6, Park View Plaza, (Income Tax Office's Ground Floor), 4th Main, Near Vishweshwaraiah Park, Pj. Extension, Davangere-577002	325444	Mc.Sujay
Karnataka	Gokak	Cell World	Banshankri Complex, Basaweshwara circle, opp to court Gokak - 591307	9343441777	Mc.Shivanand / Chougala
Karnataka	Gulbarga	Aishwarya Communication	C-9, Asian Plaza S.V.P.Chowk Main road Gulbarga-585102	329447	Mc.Mallikarjun
Karnataka	Hassan	Sree Digital Solutions	1380 Mission Hospital road opp Hindbed college - 573201	9343566658	Mc.Vidya Shankar
Karnataka	Hosakote	Exposys Communication	Shop no 1, Mahalatha Devi Complex M V Badavane, College Road, Hoskote-562114	7931229	Mc.Raghunandan
Karnataka	Hubli	Shruti Services	A-115, (Lower Ground Floor), IT PARK, Opp. Glass House, Hubli - 580029.	3290671	Mc.Mahendar
Karnataka	Hunsur	Sriam Infocom	No.6, Municipal complex, H.D.Kote road circle - 571105	253699	Mc.H.H.Pradeep
Karnataka	Kadur	Ashwa Tele Mobiles	Opp. Basaweshwara Hospital, TB Road Kadur	9341033310	Mc.R.Ananda Murthy
Karnataka	Kanakapura	Sumakh Communications	Harshitha Complex, Budkere, Bangalore main rd, Near KSTC Bus stand Kanakapura-562117	9342743344	Mc.R.C.Harish
Karnataka	KGF	Global Net Communications	Opp. King George Hall, Geetha road Robetson pet, KGF - 563122	329559	Mc.Shiva Kumar
Karnataka	Kolar	Seanmatrix	No.384, Suguna complex, Near KSRTC bus stand, Anthargange road, Kolar 560101	2228714	Mc.Nithyanada Shetty
Karnataka	Kumta	Krishna Mobiles	938, College road, NH 17, opp RWW, Kumta - 581343	329607	Mc.D.V.Prabhu

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Karnataka	Madikeri	C.M.Communications	Shop no. 8, First Floor, M A Complex, Kohinor Road, Madikeri	9343837555	Mr.Mohamad Sharief
Karnataka	Mandya	C & C Technology	2068, First Cross, Subhash Nagar, Krishna Krupa Nilaya, Mandya-571401	402007	Mr.Charan
Karnataka	Mangalore	Innovative Infocom	15-10-537/11, Jayavama Centre, Mallikatte Circle, Kadri, Mangalore - 575002.	6563244	Mr.Sebastian Fernandes
Karnataka	Moodabidri	Media Guard Technologies	Rajeev Gandhi complex main road Moodabidri - 574227	325909	Mr.Vishwas Kumar
Karnataka	Mysore	K.K.Marketing	1432/9, Tribhuvan Towers, opp Veterinary Hospital, Dewan's Road, Dhanwantri Road Cross, Mysore - 570001	4258613	Mr.Karunakaran.
Karnataka	Nipani	Manusoft Computers	Dumale Complex Chikodi road Nipani - 591237	222005 / 9448148005	Mr. Pavan / Mahesh Dumale
Karnataka	Raichur	Akshay Electronics	Shop No.2 Ground Floor, Hotel UMA Complex, Station Road, Raichur - 584101	225300	Mr.Narasimhu
Karnataka	Ranibenur	Kruthika Communication	OLD LIC Building, Opp Gupta Petrol Bunk, PB Road, Ranibenur-581115	321444	Mr.Sujay
Karnataka	Shimoga	Chetan Electronics	C-5, Kenchappa complex, Durgigudi main road, Shimoga-577201	401889	Mr.Panduranga Rao
Karnataka	Tiptur	Shree Digital Solutions	Nanjappa complex, opp city union bank, BH road, Tiptur - 572201	9343813731	Mr.Ravi
Karnataka	Tumkur	Durga Communication	No.14 CMI Complex, Near Gayatri Theaters, Below Navratna Silks & Sarees, B.H.Road Tumkur - 572101	2256184	Mr.Naveen Kumar
Karnataka	Udupi	Sanman Mobile Services	Shop No: 15, Simaz complex, Diana circle, Court road, Udupi- 576101.	3255770	Mr.Prakash
Kerala	Alappuzha	Getronics	FIRST FLOOR, KARTHIKA BUILDING, OPP SDV BOYS HIGH SCHOOL, COURT ROAD, ALLEPPY.	3290446	Mr.Omprakash
Kerala	Alathur	Marstek	12/950, Ground Floor, AR Complex, Opp. Munsiff's Court, Alathur, Palakkad Dt.- 678 541	321311	Mr. Rajesh. V.
Kerala	Aluva	Sed Infosys	BUILDING NO 12/57 DOOR NO 8, FIRST FLOOR, POOTHULLIL BUILDING, ALUVA - 683 101.	3235599	Mr.Sudheesh
Kerala	Attingal	AM Technologies	Mamam, Near Dreams Theater, Attingal	3290301	Mr.Saji
Kerala	Badagara	Amarkish Communications	1st Floor, Sarala Complex, Near KVR Motors, N.H. Bypass Road, Nut Street, Vadakara-673101.	3255756	Mr.Jeeju / Mr. Baju
Kerala	Cherthala	Cherukattu Phones	Krishna Building, Opp govt boys high school, AC road, Chertalli	9388910703	Mr.Mahesh C D

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Kerala	Ernakulam	Guidelines	CC28/902, Ground Floor, Mundukottackal Estates, S A Road, Kadavanthara, Cochin-682020	4000113	Mr.Manoj G
Kerala	Ernakulam	Teletech Systems	20, First Floor, Penta Estate, above Airtel office, Janatha Junction, Palarivattom, Cochin-25	3207554	Mr.Sony Thomas
Kerala	Ernakulam	Zenicon Infocom(P) Limited	Above Syndicate Bank, Opp Cochin Shipyard, M.C.Road, Cochin-15	2359511	Mr.Jaimon Joseph
Kerala	Irinjialakkuda	Nice Mobiles	NICE BUILDING, ST. JOSEPH'S COLLEGE JUNCTION, IRINJIALAKKUDA - 680121	3291515	Mr.Sebastian
Kerala	Kalpetta	Mobi Care	Ground Floor, Rawuthar Building, Opp. Vijaya Bank, Chungam, Kalpetta.	329366	Mr.Thanseer
Kerala	Kanhangad	XN Computers & Datacare	1st Floor, BENGACHERY COMPLEX, OPPVIYAPARA BHAWAN, T B ROAD JN, KANHANGAD.	3259755	Mr.Sandeep
Kerala	Kannur	Sahar Communications	5B-666-C & D, PRESTIGE CENTRE, GROUND FLOOR, SUB REGISTER OFFICE ROAD, KANNUR.	3258585	Mr.Ajai Abhiram
Kerala	Karunagapally	Supreme Enterprises	Opp to KSRTC Bus stand, Karunagapally-690518	2620282	Mr.Ratish / Premkumar
Kerala	Kasargode	XN Computers & Datacare	BENDICHAL COMMERCIAL COMPLEX, PRESS CLUB JN, MG ROAD, KASARGOD.	324755	Mr.Mr.Sandeep
Kerala	Kollam	Digital Infosystems	MC-3087, New Block, Bishop Jeromi Nagar, Chinnakada, Kollam-691001	2760647	Mr.Johnson Lawrence
Kerala	Kottarakkara	Sivashakthi Communications	KP-II/1574, Vajiyavila Building, Near Marthoma Girls High School, Pulamon PO, Kottarakkara	3298191	Mr.Suresh
Kerala	Kottayam	Svm Technologies	M.P.M COMPLEX, Near Popular Maruti Show Room, M.C ROAD, S.H MOUNT, KOTTAYAM, KERALA- 686 006	2565303	Mr.Rajesh K S
Kerala	Kozhikode	Domain Systems & Services	17/1178E, 1st floor AL FAHAD, SABA school cross road, Putiyara, Kozhikkode	2722222 / 3243745	Mr.Mukundan
Kerala	Kunnankulam	Y Star Mobiles	ROOM NO 4/289/B2 2nd floor, City complex, Opp Tempo Park, Town Hall road, Kunnankulam.	320009	Mr.Vijumon.K.V.
Kerala	Manjeri	Integrated Computer Systems	Royal Tower, TB Road, Manjeri - 676121	3299686	Mr.Thomason Chacko
Kerala	Mavelikara	Ettutharayil Agencies	GROUND FLOOR, KOIPPALLIL ROYAL ARCADE, PUTHIYAKAVU, MAVELIKARA-690101	3293340	Mr.Biji
Kerala	Palai	Cyriac TV Plaza	Vypana Building, Petta Road, Palai.	329746	Mr.Tom Cyriac
Kerala	Palakkad	Orion Techno Solutions	12/310/15, FIRST FLOOR, METRO COMPLEX, HEAD POST OFFICE ROAD, PALAKAD-678001	3200255	Mr.Khaja Hussain



STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Kerala	Pathanamthitta	Melamparambil Agencies	10/264, Main Road, Town, Pathanamthitta - 689645	2223132	Mr.M.V.Francis Oommen
Kerala	Thalassery	Sahar Communication	44-1929, 1st Floor, MACKSON MONOR, OPP PARIS RESIDENCY, LOGANS ROAD, THALASSERY	3208585	Mr.Ajai
Kerala	Thiruvalla	Sangeetha Electronics	524/17, Central Tower, Cross Junction, Thiruvalla	3203000	Mr.Ranjeev Kumar
Kerala	Thiruvananthapuram	Appolo Systems	Thelungu Chetty Complex, Shop No 23-24, Kalpalayam JN Karamana, Thiruvananthapuram 695 002.	2340523	Mr.Santosh
Kerala	Thiruvananthapuram	Smart Mobile	TC 2/3554(5), First Floor, Opp. Petrol Pump, Kesavadasapuram, Trivandrum-695004	3200105	Mr.Krishnakumar P B
Kerala	Thodupuzha	National Electronics	Shop No 5, Aswathy Shopping Complex, Temple Junction, Thodupuzha	220320	Mr.Aneesh M A
Kerala	Thripurayar	Nice Mobiles	382J, 1st Floor, Century Plaza, N.H.17, Near Bus Stand, Thripurayar	3240400	Mr.T.PSebastian
Kerala	Tirur	Telit Telecom Shop	GROUND FLOOR, AL AMAL COMPLEX, PAN BAZAR, TIRUR	3295623	Mr.Vasan.K.Nair
Kerala	Trichur	Cell Tech	Shop No 5/2, TC25/326, N.P.Tower Gunvayoor Road, Near Bindu Theatre, West Fort, Thrissur.	2387386	Mr.Santom Kalloor
Kerala	Vaikom	Vaikundam Electronics	II/ 214C, Mannamkeriel Complex, Bus stand Road, Valiyakavala, Vaikom	326616	Mr.Sreekumar.G
Madhya Pradesh	Balaghat	Shri Computers	Keshar Plaza Complex, Hanuman Chowk, Balaghat	9300632132	Mr.Deepak Bajaj
Madhya Pradesh	Betul	Shivam Electronics	Japarakash Chowk, Kothi Bazac, Auto Stand, Betul - 460001	9329099071	Mr.Vikram Motwani
Madhya Pradesh	Bhopal	Akansa Enterprises	25-26, CENTRAL MARKET, ROSHANPURA SQUARE, BHOPAL MP	7553201626	Mr. Dinesh Aajja
Madhya Pradesh	Bhopal	GSM Solution	M-2 CHETAK COMPLEX, ZONE -2 M.P NAGAR	4229213	Mr.Neersaj
Madhya Pradesh	Bhopal	Music Mahal Bhopal	SHOPNO.1 NEW MARKET NEAR HANUMAN MANDIR, BHOPAL	5220725 / 2579178	Mr.Shitu
Madhya Pradesh	Chindwara	Bunty Photoelectronics	Shop No.33, Jiji Bai Complex, Parasia Road, Chindwara	230358	Mr.Ritesh Shukla
Madhya Pradesh	Dewas	New Taj Electronics	4, New Market, Moti Bunglow Main Road, Dewas	220005	Mr.Shabbir Shaikh
Madhya Pradesh	Guna	Mobile Junction	Jai Stambh Chauraha, NiCentral Bank, Guna-473001	329277	Mr.Deepak Arya
Madhya Pradesh	Gwalior	Galav Computers	Ground floor, Ganpati Plaza, City Centre, Gwalior	4013311	Mr.Praadeep Dixit
Madhya Pradesh	Gwalior	Versha Sales & Service-Asp	GROUND FLOOR SARAFI BAZAR LASHKAR, GWALIOR	4060444	Mr.Ajit Kumar
Madhya Pradesh	Indore	Ayushi Electronics	UG-10, Ratnamani Complex, 7/1, New Palasia, Indore-452001	3251284	Mr.Santosh Dwivedi

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Madhya Pradesh	Indore	IT Customer Care	UG- 11, B. M TOWER, OPP. LOTUS, SAPNA SANGITA ROAD, INDORE	3207283	Mr. Sanjay Dhankar
Madhya Pradesh	Indore	Pioneer Marketing	Prem Trade center Opp.Gujarati Girls collage, Indore	4006503	Mr.Ritesh
Madhya Pradesh	Itarsi	S.S. Telecommunications	Vijayshree Complex 5, Line Sarafa Bazar, Itarsi - 461111	9300272505	Mr.Akilesh Saxena
Madhya Pradesh	Jabalpur	Sri Sai Communication	C/O MUSKAN CARD GALLERY, 766, SHAHID SMARK MARG, NEAR RANITAL SQUARE, JABALPUR-482001	4046831	Mr.Mohit Sareen
Madhya Pradesh	Jabalpur	I T Solution	Opp Dr.Grover Hospital, Gate No-3, Wright Town, Jabalpur	4014064 / 4064370	Mr.Sanjeev Choubey
Madhya Pradesh	Katni	Excellent Infosys	20/306, Gunanak Road, Katni	406047	Mr.Prafull Agrawal
Madhya Pradesh	Khandwa	Naman Refrigeration	TAPAL CHALL, KHANDWA	2250089	Mr.Yashwant Mali
Madhya Pradesh	Mandsaur	Sky Link Mobile Services	Payas Ice Cream Parlour, 16, Opium Godown Road, Nai Abadi, Mandsaur 458001 (M.P)	243978	Mr.Gaurav B. Mittal
Madhya Pradesh	Morena	Mobile Plaza	M S ROAD, JIWAJI GUNJ, OPP BANK OF INDIA, MORENA	400886	Mr.T C Shivhare
Madhya Pradesh	Neemuch	Shree Balaji Mobiles	Jain Bhavan Road, Near Ganganagar O/E, NEEEMUCH (M.P)	320033	Mr.Savesh Goyal
Madhya Pradesh	Ratlam	Kirti Telecom	124 Station road Opp.Raj Tower, Ratlam - 457001	239346	Mr.Kirti Jain
Madhya Pradesh	Sagar	Neeta Computers	Hanuman Mandir Gali 5, Civil Lines, Sagar -470001	329951	Mr.Ramesh Gupta
Madhya Pradesh	Satna	Akashwani Agencies	OPPCMA SCHOOL, SHOP NO.2, ANNAM CHHAYIA, REWA ROAD	416455	Mr.Ajay Sukhamani
Madhya Pradesh	Satna	Maa Shaarda Communication	Gali No 1, C/o Shri Gopal Sharan Singh, Pushp Raj Colony, Satna	7672320797	Mr.Prashant Singh
Madhya Pradesh	Shivpuri	Ocean Computer Corporation	1st Floor, Vishnu Mandir Market, Near Panipat Handloom, Shivpuri	225505	Mr.Sameer Saxena
Madhya Pradesh	Ujjain	Galaxy Computers & Communication	43/2, Varruchi Marg, Opp Madhav Nagar Police Station, Freeganj, Ujjain	2515995 / 253999	Mr.Anurag Chhajlani
Maharashtra	Ahmednagar	T V Spot	B-3, ADARSH SAMRUDHI, NR. CHOLUPATI, KARANJA-414001	2326267	Mr Aril Apte
Maharashtra	Akola	Supra Computers	Ushakiran Complex, Shastri Nagar, Opp. Hotel Surya, Akola.	9326866469	Mr.Prashant
Maharashtra	Amravati	Scorpio Services	Shop No. 84, Ground Floor, Gulshan Towers, Nr. Panchasheel Cinema, Amravati, Pin-444601	2567302	Mr. Pramod
Maharashtra	Aurangabad	Electronics World	Sahyadri Building, opp. To Shivaji School, Khokadpura, Aurangabad-431001	6454532	Mr. Rauf

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Aurangabad	Unique Telematics	SHOP NO. 108A, FIRST FLOOR, 'TAPADIYA SUPAR' MARKET, NIRALA BAZAR, AURANGABAD -	2356447	Mr.Mahesh
Maharashtra	Beed	Shree Enterprises	Behind Raj Hotel, A H Wadia vachnalay rd, Beed	9373701010	Mr. Rajiv Joshi
Maharashtra	Chalisgaon	Mobile Point	SHOP-22, MOMAYA COMPLEX, NEAR BUS STAND, CHALISGAON	9372712777	Mr. Dashrath Vaishnav
Maharashtra	Chandrapur	Shiv Communications	Ramnagar, Near Durga Mata Mandir, Sindhi Colony, Chandrapur-442 401	329546	Mr.Mahesh
Maharashtra	Chinchwad (Pimpri)	Ritz Communication	Shop No 10, "A" wing, Jai Ganesh Vision, Next to Hotel Neelkanth, Near Fam Multiplex, Akardi, Pune-411033	27485613 / 32661900	Ms Nikita
Maharashtra	Dhule	Pearl Communications	Shop no 3, CKB arcade, Near Depur Bus stand, Aga rd, Dhule	324666	Mrs. Sonu Atul Bang
Maharashtra	Gondia	M/S V2 Care	Opp. Cofee house, Railtoil, Gondia 441614	329322	Mr. Krishna Sargam
Maharashtra	Hatkangale (Ichalkaranji)	Sai Vision Services	11/236 MOHAN ARCADE SHOP NO B14, STATION ROAD, TAL-HATKANGALE, CITY-ICHALKARANJI-416115	2439989	Mr. Sameer Bhonsale
Maharashtra	Islampur	Solar Shoppo	Kachare Lane Islampur, Distt Sangli	9326777603	Mr. D.H.Patil
Maharashtra	Jalgaon	TellUs Associates	Shop No 16, 'G' Wing 1st Floor, Near Tarun Bharat Office, Golani Market, Jalgaon Maharashtra.	9370164545	Mr. Shaikh
Maharashtra	Jalna	Megha Multi Serices	Shop no 04, A wing, Udhan complex, Jalna	9326201408	Mr. Narendra Kulkarni
Maharashtra	Kolhapur	Sms Services	S5, Diwan Tower, Opp. Nutan Marathi School, Near Mirajkar Tikky, Kolhapur, Pin -416005.	2541120	Mr. Prakash Patil
Maharashtra	Kopergaon	Om Sai Mobile	Opp. ST Bus Stand, Dahamgaon Road, Kopergaon, Dist Ahmednagar	9373295009	Mr.Mahendra Devkar
Maharashtra	Latur	Hindustan Mobiles Services	Side no. 111, Shop 59, 49 Gandhi Market, Near Bhalchandra Blood Bank, Latur-413512	641111 / 982345500	Mr. Sandeep Parande
Maharashtra	Malegaon	Cell Care	Shop no 59, SR no 57, New Islampur, Malegaon	9326211996	Mr Ansari Mohd Israfil
Maharashtra	Mumbai	Cyber Gyan Convergence & Services (India) Pvt. Ltd.	43/44, Gold Filled Plaza, Sion Bandra Link Road, Sion, Mumbai-400017	24075939	Mr. Jatin Parekh
Maharashtra	Mumbai	G.P.Electronic	Shop No 6 Ambika Cooperative Housing Society, Jawahar Nagar Road No 2, Near Railway Crossing, Goregaon West, Mumbai 400062	2232633960	Mr.Mayur

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Mumbai	Grace Tele Services	Shop no 3, C/1, Manik Nagar Soc, Panjabi lane, Borivali (W), Mumbai 400092	32455033	Mr. Daniel
Maharashtra	Mumbai	Komplex Telecom Corporation	Shop no.A/19, Nootan Nagar Premises Co. Op. Hg. Society, Near Bandra Rly. Str., Towards Bandra Talav, Turner Road, Bandra (West) Mumbai 400050	64147153	Mr. Sutar
Maharashtra	Mumbai	LG Service Centre	Shop No.1, 2, 3 Ground Floor, Rajakamal Bldg, Opp.Ram Mandir, Subhash Road, Vile Parle(E) Mumbai 400 057	26134917	Mr. Rakesh / Omkar
Maharashtra	Mumbai	Paras Telecom	2nd floor, Rear Side Capital Cinema Building, Wauddy Road, Opp. Mumbai CST Railway Station, Mumbai	65279042	Mr. Ravindra
Maharashtra	Mumbai	Sai Tele Services	A-110, Satyam Commercial Complex, M.G.Road, Chhatkoper (E), Mumbai - 400 077.	4011264	Ms. Isha
Maharashtra	Mumbai	Sierra Mobiles	Opp Prabhu Darshan, L.J.Road, Shivaji Park, Near Shiv Sena Bhavan, Mumbai 400016	24382200	Mr. Anurag
Maharashtra	Mumbai	Trident Communications	8-A, Vasant Smruti, Dadasaheb Phalke Road, Beside "BharatKshetra Building", Near Dadar station(E), Dadar -East, Mumbai - 400 014.	65047270	Mr. Kalpesh
Maharashtra	Mumbai	Yash Telecom	Dadarkar Tower, Shop no.1, Opp.Film Centre, Near Crossroads, Tardeo, Mumbai - 400 034	23522702	Mr.Girish
Maharashtra	Mumbai	KBs Communications	Shop No.2A, Maharashtra Seva Sangh, Near Apna Bazar, Nehru Road, Malund (West), Mumbai-400080.	32107410	Ms. Harsha
Maharashtra	Nagpur	Epoch Services	Shope No. UG-9, Bhakati Vihar Complex, Chapru Nagar Square, Lakadganj, Nagpur -440008	3246777	Mr. Girish
Maharashtra	Nagpur	Shivatronics	B-31 Sai Regency Complex Ravi Nagar Square Nagpur Maharashtra 440044	9300892579	Mr. Ravi Gupta
Maharashtra	Nagpur	Spectrum Marketing	Shop No.2, Dharampeth Towers, West High Court (WHC) Road, Dharampeth, Nagpur - 440010	22527823	Ms. Sonali
Maharashtra	Nanded	Devansh Microtronics	Beside forest office Nr. Ranbidkar Resi.Nanded	249789	Mr. Prashant Palnate
Maharashtra	Nasik	Mobs Associates	SHOP NO. 8A, FIRST FLOOR, 'KAPOTE-MEHER' MARKET, RENUKA NAGAR, WADALA NAKA, DAWRKA, NASIK	6523613	Mr. Alim Kazi
Maharashtra	New Mumbai	Beekeyen Enterprises	Block No 1, Shop No. 17, Mahaveer Milan, Sector 28, Near Blue Diamond, Hotel, Vashi, New Mumbai	6514304	Mr. Shailesh
Maharashtra	New Mumbai	LG Service Centre- Dakc	H Block, Ground Floor, Dhirubhai Ambani Knowledge City, Navi Mumbai-400709	30386032	Mr. Sachin

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Panvel	Oceanic Tele System	Shop No. 3, Sai Arcade, Sector 15, New Panvel (E), Dist. Raigad.	9322217221	Mr. Chetan
Maharashtra	Pen	Skyphone Enterprises	SHOP NO 3, SHREE COMPLEX, OPP UNIQUE BAZAR, PEN KHOPOLI ROAD, PEN, DIST RAIGAD-402107	9373435000	Mr Kuldeep
Maharashtra	Pune	Horizon	32A, Lotus Court, Near Hotel Panchami, Pune Satara Road, Pune.	32501222	Mr. Nilesh Pundye
Maharashtra	Pune	Microchip Solutions	Akshay Chambers 216 Naryan Peth, Near Bhide Bridge, N C Kelkar Rd, Pune-411030	24471155	Mr Mahyesh Bhosale
Maharashtra	Pune	Mobile World	G-25, AKSHAY COMPLEX, DHOLE PATIL ROAD, PUNE-411 001	30942268	Mr.Pawan Mantri
Maharashtra	Pune	Wiki Info Technologies	Shop No4, Amit Complex, 474, Sadashiv Peth, Opp New English School, Tilak Road Pune Maharashtra	24434134 / 9322206000	Mr.Vivek Surve
Maharashtra	Ratnagiri	S P Electronics-Pune	shop no-19, Paramani Complex, K C Jain Nagar, Nr Maruthi Mandir, Ratnagiri-415612	329556 / 221982	Mr.Santosh Prabhu
Maharashtra	Sangamner	Rajpal Telecom	Yashodhan complex, New Nagar Rd, Near hotel Chaitali, Sangamner	320888	Mr Harish Rajpal
Maharashtra	Sangli	Ramesh Electronics	Dr. G. S. Joshi Banglow, Opp. B.Ed Collage, Rajwada, Sangli. Tq. Miraj, Dist:- Sangli.	2327601 / 09372107601	Mr. Suresh Shegane
Maharashtra	Satara	Shivkal Mobilink	173/6/7 Raviwarpath shop no-11, Vithal Lila Complex, Powai Naka, opp Janta Bank, Satara-415002	325212	Mr. Mahesh Shirinde
Maharashtra	Shrirampur	Siddharth Infocom	Shop No 1, Hotel Sidhartha Building, Sidhartha Stop, Sagamer Road, Shirampur-413709	9326611445	Mr. Kedar Fargade
Maharashtra	Solapur	Atharva Electronics Pun	940/2 NORTH SADAR BAZAR, GARUD BUNGLow, SOLAPUR-413003	2317595	Mr. Umesh Kamalapurkar
Maharashtra	Solapur	Jawaharlal Radio Service	184, Gold Finch Peth, nr Hotel Ritesh, Solapur - 413007.	2725030	Mr. Prasanna J Chavan
Maharashtra	Thane	Ekadant Corporation	Shop No1, Ground Floor, Laxmi Smruti CHS, Opp Bal Ganesh Temple, Near Mahimai Talao, Edulji Road, Charai, Thane (W) 400602.	32130222	Mr. Paresb
Maharashtra	Thane	E-Link Solutions	Shop No.5, Type C, Bldg no.5/6, Shanti Vihar, Mira Road -E	9322839386	Mr.Omkar
Maharashtra	Kalyan	Sky Lark Associates	Shop:1, 'K' Wing, Suresh Tower Co-op. Hsg. Soc. Opp. Municipal Vegetable Market, Santoshi Mata Road, Kalyan (W)	3209899	Mr. Pravin
Maharashtra	Bhiwandi	Varad Electronics	SHOP NO2, PRABHU CHAYA BLDG, PRABHU ALL NEAR OLD GOVT. HOSPITAL, MANDAI, BHIWANDI, DIST THANE	222653	Ms. Swati
Maharashtra	Vashi	Beekeyen Enterprises	Block No 1, Shop No. 17, Mahaveer Milan, Sector 28, Near Blue Diamond, Hotel, Vashi, New Mumbai	65114304	Mrs. Kartiki

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Virar	Siddhivinyak Tele Services	Shop no 5&6, Vishnu Prasad Complex, Opp Ulkarsha School, Near S.T. Bus stand, PP. Marg., Virar ( West)	3258111	Mrs. Vaishali
Maharashtra	Wardha	Libra Electronics	C/o Anand Opticals, Soshalst Chowk, Main Road Wardha Maharashtra-442001	2242109	Ms.Manjusha
Maharashtra	Yavatmal	Combine Electronics & Services	Shop No 13, 1st floor, Old Indira Gandhi Market, Azad Maidan Road, Yavatmal-445001	9822200166	Mr. Ajay Shukla
Maharashtra	Yavatmal	I T Services	Nr datey college, C/o Yahoo cyber cafe, Yavatmal 445001	9372610121	Mr.Umesh Gadwe
Maharashtra	Yavatmal	Star Electronics	Near Shyam Talkies Ram Mandir Road Yavatmal Maharashtra 445001	2324106	Mr.Snajay Chabda
Meghalaya	Shilong	Rhapsody Care	E N COMPLEX, G.S. ROAD, Below Town Pharmacy	2547946	Mr.R.R. Wazi
Orissa	Anugul	Creative Solution	Hanuman Bazat Near gundicha mandic, Angul-759122	329207	Mr. Tapas Sahu
Orissa	Balasore	Raghnath It Solutions	Azimabad, Proof Road, Balasore.-756001	329267	Mr.Sujit Kr Sen
Orissa	Berhampur	Rashmi Electronics & Computers	Shop No.19, Sai Complex, Main Road, Gandhi Nagar, Berhampur, Orissa	3290409	Mrs. Rashmi Ranjan Sharma
Orissa	Bhadrak	A B Associates	Nr:Reliance Web World Express, Bypass Road, BHADRAK-756100	9337040450	Mr. Kartik Chandra Rout
Orissa	Bhubaneswar	Miracle Services It Extn.	Plot No. 136, Fr. Lane of Vigilance Office, Beh. Passport Office, Surya Nagar, BBSR.	2532383	Mr.Chaco/ Suprava
Orissa	Bhubaneswar	S.A.Infosys	291,Bomikhal, Opp.Akamra cinema hall, Bhubaneswar-751010	2573114	Mr. Ashwini K Sahoo
Orissa	Cuttack	O.A.Infotech	Behind Govt Bus Stand, Badambadi, Cuttack -753012	9338912613	Mr. Arabind Rout Ray
Orissa	Puri	Bajinath Infocomm	At Municipal Mkt, Grand Road, Puri-752001	9337032005	Mr.Ajay/ Sandeep Agrawal
Orissa	Rourkela	Infosys	13, Bisra Road, subhadra complex Opp.Choudhary Petrol Pump, Rourkela	9337403999	Mr. Arun Ghosh
Orissa	Sambalpur	A.N.Communication	Inf. Of Zilla School, Pensionara, Sambalpur-768001	9337660919	Mr. Md. Abdul Aziz
Punjab	Amritsar	Bajaj Telecommunication	87, G Floor, Nehru Complex, Lawrence Road, Amritsar-143001	3258599	Mrs.Suman Bajaj
Punjab	Barnala	Unique Infotech	Mittal Street, Near M C Office, Barnala-148101	238007	Mr.Pankaj Goyal

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Punjab	Batala	Dream Services	Shop No 111 Opp Improvement trust office, Dharamsingh Market, Batala.	9316676018	Sandeep Singh
Punjab	Bhatinda	Lalli's Electronic Gallery	1139-A, First Floor, Amrik Singh Road, Nr Gole Digg, Bhatinda-151005	2239500	Mr.Ashok Kakria
Punjab	Chandigarh	New Tech	SCO 495/496 SEC 35C First floor	9814244862	Mr.Pawan
Punjab	Chandigarh	Vignesh Services	S.C.O- 189-90, Sec- 34, Chandigarh	3018028	Mr.Makesh Arya
Punjab	Hoshiarpur	Kuldip's Mobile Care	Dhobian Wali Gali, Phagwara Road, Hoshiarpur-146001	226906/ 2232906	Mr.Kuldip
Punjab	Jalandhar	Mobile Center	233/1, Saheed Udham Singh Nagar, Backside Hotel Preet, Nakodar Road, Jalandhar-144001.	3292666	Mr.Vikas Sangar
Punjab	Kapurthala	Arun Electronics	217, C Block, Jama Masjid, Shopping Complex-144601	329254	Mr.Arun Khosla
Punjab	Kotkapura	Om Mobile Service Centre	1ST FLOOR DHANU RAM PANSARI, Railway Road-151204	223069 / 9815759239	Mr.Rohit Mittal
Punjab	Ludhiana	Anant Shree Comp	19K Opp PAU Gate no 1 Ferozpur Road	3245386	Ms Monia chaudhary
Punjab	Ludhiana	Shahi Communication	Shop No.5, Revolving Restaurent 4X International, 583 L, Model Town, Ludhiana	3244190	Mr.Amit Shahi and mcvimal
Punjab	Malaut	Khurana Mobile Solution	SHOP NO 7 OPP, NEW TELEPHONE EXCHANGE G T ROAD MALLIAT PIN NO - 152107	9316940003	Mr.Ramesh Khurana
Punjab	Malerkotla	Prime Infocomm	Opp. Main gate, Govt. College, Malerkotla-148023	253899	Mr.Rohit Bansal/ Raj Verma
Punjab	Mandi Gobindgarh	Aditya Infocom	Main Iron Market, custom and exise office Mandi Gobindgarh	326896	Mr.Naresh Aggarwal
Punjab	Mansa	Sharma Telecom	Cinema Road NAGINA MARKET OPPPARKASH BOOK DEPOT, Mansa	9316173009	Mr.Udesh Kumar Sharma
Punjab	Moga	Rashpal Telecom	6, Red Cross Road, Court Road, Near Old Court, Moga-142001	222468	Mr. Rashpal Singh
Punjab	Nabha	Echo Telecom	Opp. Milan Palace Circular Road, NABHA 147201	504501	Mr.Girish Garg
Punjab	Nawashar	Kapoor Electronics	Kothi Road, Opp Kumar Hotel, Nawashahr-144514	508085	Mr.Narender Pal
Punjab	Pathankot	Leo Comp	Near Tourist hotel, military ground, Pathankot	9814586406	Mr.Mr. Kamal
Punjab	Pathankot	Touch Infosys	189 Opp. Guru Nanak Park, Model Town, Pathankot.	3290300	Mr.Navdeep Singh Bedi

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Punjab	Patiala	Image Services	Shop No.84, First Floor, Leela Bhawan Opp Punjab National Bank, Patiala-147001	2222796 / 9872281524	Mr.Rohit Bansal
Punjab	Phagwara	Bansal Telecom	G T Road, Railway Road Chowk Near Corneet Office, Phagwara-144401	461321 / 9888005339	Mr.Mangalsh
Punjab	Rajpura	M K Enterprises	Shop no.6, Gurudwara Singh Sabha Market, Rajpura Town-140401	2652569	Mr.Johny
Punjab	Ropar	Arora Communication	Shop No.1, Lehari Shah Mandir Road, Ropar	9872363032	Mr.Amit Arora
Punjab	Samana	Sangam Mobile Care	Tehsile Road, Near Garg Laboutry	505648	Mr.Vaneet Kumar
Punjab	Sangrur	National Computers	SUNAMI GATE, Near Guru Nanak School, SANGRUR PIN NO - 148001	233335 / 9814586196	Mr.Sarabjit Singh
Punjab	Sarhind	A.S. Infocom	Crain Market, Cinema Road Sirhind City-140406	500726	Mr.Jaspreet Singh
Rajasthan	Ajmer	Nehal Infotech	F-3, FIRST FLOOR, AMAR PLAZA, Opp. DAULAT BAGH, AJMER-305001	3291404	Mr.Suresh Sharma
Rajasthan	Ajmer	Prangan	112/10, Civil lines, Ajmer	9828503092	Mr.Pareek
Rajasthan	Alwar	R.K.Telecom	SHOP NO.112, FIRST FLOOR, GANPATI TOWER NEAR NANGLI CIRCLE, Alwar	9351390057	Umesh sharma
Rajasthan	Beawar	Srikrishna Infocom	Chaoni Road, Bhagat Chauraha, Near Roadways Bus Terminus, Beawar	329675	Mr. Dheerendra Agrawal
Rajasthan	Bhilwara	Ajanta Communications	No3, Bapna Complex, Pur Road, Bhilwara	329549	Rafiq
Rajasthan	Bikaner	Tech Solutions	1st Floor, 222 & 223, Ganpati Plaza, KEM Road, Bikaner	3292423	Mr.Aziz/Vika
Rajasthan	Chittorgarh	Arihant Infotech	A46, Meera Market, Near Rajasthan Patrika Office, Chittorgarh-312001	325933	Mr.Abbhishek
Rajasthan	Chomu	Tambi Telelink	Kotwali chabutra, dhan ji ki gali, Sadar Bazar Chomu-303702	9314090400	Mr.Anup Tambi/ Dp Saini
Rajasthan	Dholpur	Tirupati Telecom	14, Bhagwati Market, Near Jagan Cinema hall, Jagan Tiraha, Dholpur	9314014093	Mr.Moshin/ Devender
Rajasthan	Jaipur	Alpha Infotech Systems	F-1, First Floor, Krishna Mall, Lakshmi Mandir Crossing, Tonk Road, Jaipur-302015	3299724	Shatnagan mangal
Rajasthan	Jaipur	Alliance Communication	G6, City plaza, Space Cinema Hall, Jhotwara Road, Jaipur-16	9351371549	Amit/Bhushan
Rajasthan	Jaipur	Solution Computers	Plot No.4 Krishna Nagar StationJanpath Near Hotel Paradise Jaipur	5106388	Mr.Dhreej Mathur
Rajasthan	Jhunjunu	M S Mobile Point	Kaswan Complex, Opp Roadways Bus Stand, Jhunjunu	9314011951	Mr.Abbhishek / Mr.Sunil
Rajasthan	Jodhpur	Omega Electronics	Plot No.196 SS Tower, AkhaliyaChowaha Jodhpur-342003	3291214	Mr.Pratap Singh



STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Rajasthan	Kishangarh	Capital Enterprises	5, Radha Krishan market, Opp. Sardul school, Kishangarh-305801	326550	Mr.Shatrungh
Rajasthan	Kota	Cyber Infosystems	26, Ground floor, Kalawati Paliwal market, Gumanpura, Kota-324007	2392153	Mr Rajnish
Rajasthan	Kota	Saya Electronics	1-TA-16, Vigyan Nagar, Kota	9828503246	Mr.Lalit
Rajasthan	Kotputli	Isha Communications	11, ground floor, Govardhan plaza, Nehru Bazar, Kotputli	9314140001	McVjender
Rajasthan	Nagaur	Jam Appex	Shop num.7, Opp. Old power house Ram Poll, Station road, Nagaur	329595	Mr.Amit
Rajasthan	Nathdwara	Geniune Infotech	Shop num.10, Suriya apartments, Opp.Vandana talkies, Bus stand, Nathdwara.	329208	Mr.Cajender/Mr Ashwini Purohit
Rajasthan	Pali	Mansi Mobile	9, Vasant Vihar, Opp. Bangur college, Pali-306401	9352766555	Mr.Abhishek
Rajasthan	Shriganganagar	Telecare Servecies	33, J Block, Near Birbal Circle, SriGanga nagar	3207687	Abhishek
Rajasthan	Sikar	Rita Computers	Shop No.4, Kabra Market, Shramdan Marg, Sikar-332001	329320	Mr.Saurav Chakravarthy
Rajasthan	Udaipur	Shree Telelink	31, First floor, Indra prasth complex, Delhi gate, Udaipur-313001	3261777	Tanujay Jain
Tamilnadu	Ambasamudram	A to Z Communications	63-D, KNV Complex, Santhai Bazaar, Ambasamudram -627401	251143	Mr Raja Selvakumar
Tamilnadu	Arkonam	G.M. Marketing	NO.3/4, SUBURAYAN STREET, ARAKKONAM-631001	231395	Mr.Mr.P.Gajapathi
Tamilnadu	Arni	Digitech Computers	Shop No. 201/82- B1, SM Road, Arni - 623101	223929	Mr.D.Mohan Ram
Tamilnadu	Aruppukottai	The Mercury Computers	607, MADURAI ROAD, NEAR NEW BUS STAND, ARUPPUNKOTTAI-626101	222552	Mr. R. Boominathan
Tamilnadu	Attur	V.R. Net	VRNet, Dr.Arumugam complex, salem main road, ATTUR	243585	Mr.Senthil Kumar
Tamilnadu	Batlagundu	Karthik Communications	No 221, Main Road, Batlagundu- 624202	9360019090	Mr Lakshmanan
Tamilnadu	Bhavani	Sri Abirami Electronics	2E, Pavadi Street, Anthiyur Corner, Bhavani-638301	230919	Mr Balamurugan
Tamilnadu	Chegalapatu	SKB Electronics	No-42 Devarajanar pillai Street, Vedachalam Nagar, Chengalpet	37406080	Mr.Balaji
Tamilnadu	Chennai	Genesis Communication	63/3, First main road, Gandhi Nagar, Adyar, Chennai-600020	24401188	Mr Suresh
Tamilnadu	Chennai	CS Systems	547/352, F M Towers, Mount Road, Nandanam, Chennai-6000035	24330889	MrNicholus
Tamilnadu	Chennai	Sabisu	B2, Golden Enclave, New 275, Old 184, Poonamallee High Road, Kilpauk, CHENNAI 600 010.	26612347	Mr.Palini
Tamilnadu	Chennai	Unicare Infocomm Services	No.293, Arcot Road, Next to Indian Overseas Bank, Kodambakkam Chennai - 24	24724666 / 52047059	Mr.Kartik
Tamilnadu	Chennai	Garage De Telecom	OLD No:30- NEW No:10, KMBF BUILDING, 1ST FLOOR, DURAISAMY ROAD, NEAR POTHY'S, TNAGAR, CHENNAI 600017	28143454	

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Chidambaram	Future Tech	Hasan Towers, 1st Floor, No. 14, V.G.PStreet, Near Hotel Ritz, Chidambaram	222150	Mr.Shaker
Tamilnadu	Coimbatore	Classic Electronics	No 1/1, Alagappa Road, 6th St, Tatabad, Coimbatore - 640012	4374875	Mr Arivazhagan
Tamilnadu	Coimbatore	Fast Track	138-C, TV Swamy Road ( West ), RS Puram, Coimbatore - 641002	2551155	Mr Anand
Tamilnadu	Coimbatore	Nucom Services	3/61, Master Building, Kattoor Road, Pappa Naicken, Palayam, Coimbatore - 641037.	4351569	Mc.Uthaman
Tamilnadu	Cuddalore	Kasturi Cellular Service	NO: 37 (2C) BHARATHI ROAD, CUDDALORE- 607 001, CUDDALORE DISTRICT, TAMIL NADU.	220183	Mr Raghupati
Tamilnadu	Cumbum	LG Mobile Service Gallery	No 52, Gandhiji Street, CUMBUM-625516	320800	Mc.Senthil Kumar
Tamilnadu	Dharapuram	IT Zone	40-A-1, Bye Pass Corner, Dharapuram-624202	329293	Mr Ramakrishnan
Tamilnadu	Dharmapuri	Calrity Digital Photo&Audio	98/29C KANDASAMY VADIYAR STREET, DHARMAPURI, 636701	329707	Mc.Raj Murugesan
Tamilnadu	Dindigul	Padma Electronics	15, Dudley high School, Dindigul	9367927080	Mc. Murali Chandra
Tamilnadu	Erode	Jans Electronics	29, Sathy Road, Near Hotel Oasis, Erode - 638004	3258526	Mr Kannan
Tamilnadu	Gobichettipalayam	Best Electronics	47a/1, kms complex kacherry medu, gobichettipalam	225598	Mc.G.A.Jayakumar
Tamilnadu	Hosur	Suryas Will Of People	R S Towers, Opp Traffic Police Station, Bangalore By Pass Road, Hosur-635109	246687	Mc.Shanmugam
Tamilnadu	Kalkkuruchi	New Magestic Cell Sales&Service	OPP TO TELEPHONE EXCHANGE, GANDHI ROAD KALLAKURICHI	228270	Mc. Munugesan
Tamilnadu	Kanchipuram	Classic Mobile Care Centre	Door No.67-A, (Shop No.5), PSK. Street, Kancheepuram-631 501	9345636900	Mc.Damodaran
Tamilnadu	Karaikal	Shree Harini Cellular Service	OPP TO NEW BUS STAND, BHARATHI MAIN ROAD, KARAİKAL-609602	320544	Mc. K. Selvaganapathy
Tamilnadu	Karaikudi	Sitiyes Electronics	10 A / 3, Muthulakshmi Complex, Opp to Income Tax Office, Sekkalai, Karaikudi - 630002	9362611455	Mc. S. Veerapandiyian
Tamilnadu	Karur	Aswathi Electronics	No 90 / 102, Old Bye pass road, Karur-639001	9843045555	Mr Satish Kumar
Tamilnadu	Kovilpatti	St.Marys Cellphones	No.6, Rajakumari Towers, AKS Theater Road, Kovilpatti	9360533649	Mc.Jyappan
Tamilnadu	Krishnagiri	Madura Care Centre	No 361, Crown Complex, Bangalore Main Road, Krishnagiri-635001	9364258223	Mr Suresh Kumar
Tamilnadu	Kumbakonam	Fargan Electronics	NO.5 VRS COMPLEX, HAJIAR STREET, KUMBakonam- 612001,	2401123 / 3290303	Mc. Surbudeen

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Kuzhithurai	Mobile Care	Shop no 211, SM Arcade, Main Road, Marthandam, Kuzhithurai - 629165	270587	Mr Surendra Kumar
Tamilnadu	Madurai	Devaa Electronics	No.4, Thirumakulam North Street, Near Ayyappan koil, Thhallakulam, Madurai-625002	4360995	Mr. Gana
Tamilnadu	Mayiladuthurai	Nrs Mobile City	NO-28 - C/14, R.R.COMPLEX, MAILADUTHURAI	223277	Mr Abdul Rahim
Tamilnadu	Nagercoil	Redeemer Electronics	Shop no 2, Pillars Gate, Balamore Road, Nagercoil-629001	327788	Mr.Dinkar
Tamilnadu	Namakkal	VR Care	77/2, Veera Vilas, Trichy Main Road. Namakkal - 637001	329304	Mr. R. Vijayalakshmi
Tamilnadu	Ooty	Mountain Cell Com	NO:302, Band lane, Commercial road, Near Liberty Theatre, Ooty-643001.	2443787	Mr.Sujith & Miss Geetha
Tamilnadu	Palani	Hi-Tech Electronics	No.76, New Dharapuram Road, Opp. ICICI Bank, Palani - 624601	320264	Mr. R. Ramachandran
Tamilnadu	Paramathy Velur	Vishwak Mobiles	No 5, KK High School Building, 98, High school Road, Paramathy Velur - 638182	224348	Mr Mohan
Tamilnadu	Pattukottai	Mobile Care	127, BIG STREET, PATTUKOTTAI	9842653921	Mr.Anul Alagan
Tamilnadu	Perambalur	The Best	Vivkanand st., M.P. office opp., Perambalur	275717	Mr.PKumar
Tamilnadu	Perundurai	Sree Baby Electronic	483 mainroad, perundurai	221800	Mr.Shiva Balan
Tamilnadu	Pollachi	Star Mobiles	SHOP NO. 5 Ground Floor, Vasanth Complex, Immamkan Street, POLLACHI.	222230	Mr.Senthil Kumar
Tamilnadu	Pondicherry	Digital Logistics	126/2, Perumal Koil Street (Bharathi Street Cutting), Pondicherry-605001	4210148 / 9843093348	Mr.G Singaravelu
Tamilnadu	Pondicherry	Balaji Electronics	No:21, 3rd CROSS STREET, Annanager, PONDICHERRY,	3090414	
Tamilnadu	Ponneri	Sri Balaji Mobile Care Center	NO. 26, THALUKKA OFFICE ROAD, PONNERI, THIRUVALLUR DIST-601204	27973381	Mr.Balaji
Tamilnadu	Port Blair	Universal Service Care	R.G.T. ROAD, PORT BLAIR, ANDAMAN-744101	329588	Mr.Naveen
Tamilnadu	Pudukottai	Yem Kay Electronics	2, Subabharathi complex, 5378, 79, Alangudi Road, Pudukottai-622001.	9344038441	Mr.Rajesh Kannan
Tamilnadu	Rajapalayam	Sri Vignesh Mobiles	292\1, TENKASI ROAD, OPP BOMBAY LODGE, RAJAPALAYAM-626117	220398	Mr.Ku.G.Muthiah
Tamilnadu	Ramanathapuram	Zeenath Telecom	13-B/23, PAL LUCKY PLAZA, RAMANATHAPURAM-623501	226750	Mr.M.S.Jahir Hussain

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Ranipet	Unicare Infocom Services	No.36, opp.Gangadhara Muddaliar Middle School, MBT Road, Novelpur, ranipet, Vellore Dist.	270806	McBasker/ McKarthik
Tamilnadu	Rasipuram	Sms Care Service	No 179 / 1, Anna Salai, Ground Floor, Rasipuram-637208	9345052553	Mr Manikavasagam
Tamilnadu	Salem	Vishwesh Mobiles	Sier Complex, 121/19A, Sarada College Road, Next to Abi Medical Centre, Salem - 636007	3290535	McYasudev Nayak
Tamilnadu	Sivakasi	Tele World	78, PARSN PLAZA, OPP.TO.WATER TANK, SIVAKASI-626123	223283	McB.Mathan Kumar
Tamilnadu	Tambaram	Saravanas Infocom Services Pvt Ltd	New No-43, Old No:3A, Mudichur road, Tambaram west, chennai 600045	32915599	McPalani/ McRanjith
Tamilnadu	Tenkasi	Airtone	1 / 17, KMSS complex, west masi street, Tenkasi. 627811	227980	McMNagaraja Sankar
Tamilnadu	Thanjavur	Z M Electronics	1006/1007 South East Rampart, Opp to Municipal Higher Sec School Tanjore - 613001	272595 / 329554	McZiauddin
Tamilnadu	Tindivanam	Reva Communications	Old No. 117/1, New No. 205/1, Nehru Street, Tindivanam - 604001	225250	McLakshmi Narayanan
Tamilnadu	Tiruchendur	Ark Mobile Solutions	ARK DTP centre, No. 1 a 7 North car street, Rayan Complex, Tiruchendur. 628215	329380	McMahesh
Tamilnadu	Tiruchengode	Balaji Electronics	108 s s d road, near lorry stand tiruchengode	325430	McSekar
Tamilnadu	Tirunelveli	Classic Electronic	39, Trivendrum Road, Opposite Kalimark, Welcome Complex, Palayamkottai, Tirunelveli-627002	2575801 / 3290339	McErkins
Tamilnadu	Tirupattur	Acal Computer Systems	52/1, kkc complex, krishnagiri road, tirupattur	325385	McSunder
Tamilnadu	Tirupur	Shri Vasavi Electronics	# 155-303, Mangalam Road, Karuvam palayam, Tirupur -641604	4244009	McU.B. Bala Murali
Tamilnadu	Tiruvannur	Softel Teleservices	No 21, Municipal Complex, Ground Floor, Panagal Road, Tiruvannur-610001.	22110	Mr Ravi
Tamilnadu	Tiruvellore	Yamkama Computer	38/186 JAWAHARLAL NEHRU ROAD, OPP TO SBI MAIN BRANCH, THIRUVALLUR - 602 001	37600529	Mr. Saravana
Tamilnadu	Trichy	S K Electronics	Raj Complex, 9/A EVR Road, Puthur, Trichy- 620017	277194	McKrishnan
Tamilnadu	Tuticorin	Snows Cell Care	Kala Complex, No 20, B-1, W G C Road, Tuticorin-628002	2334043	McKennedy
Tamilnadu	Udumalpet	Allwa Electronics	5 Thuluva vellar shopping complex, V.O.C. street, UDUMALPET.642126	223047	Mr Sentamarai Kannan

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Vaniambadi	Reva Communications	No.848/3, Cl. Road, Vaniyambadi - 635 751	395023	Mr.Lakshmi Narayanan
Tamilnadu	Vellore	Matha Communication	4, S.L.N Plaza, Opposite Odai Pillar Koil, Gandhinagar, Vello - 632006	2240800	Mr.Ganaa Shekhar
Tamilnadu	Villupuram	Broad Band	No 642, Nelruj Road, VILLUPURAM	222936	Mr.Pragasam
Tamilnadu	Virudhunagar	RBG Electronics	76/9, Lakshmi Complex, Pullalakkottai Road, (Opposite Uzhavar sandhai), Virudhunagar-626001.	420160	Mr Karrupuswamy
Tripura	Agartala	VIDEO S R	7Melarmath, H.G. Basak Road, Agartala, West Tripura, Pin:799001	2328539	Arunabha Saha
Uttar Pradesh	Agra	Ankur Care Centre	27-G/111, Hotel Panchratna Building, Opp. Income Tax Building, Sanjay Place, Agra-282002	9412254152	Mr.Ankur Goyal
Uttar Pradesh	Aligarh	A.V.Computer Services	City Enclave opp. Kumar Nursing Home Ramghat Road	3200900	Mr.Vaibhav Gupta
Uttar Pradesh	Aligarh	Infocare	T7, Vikram Arcade, Railway Road, Aligarh - 202001	3258080	Mr. Prabal Bansal
Uttar Pradesh	Allahabad	Micronet Solution	B 38/1, SHOP NO. FF3 VASHITSTHA VINAYAK TOWER, TASHKAND MARG, CIVIL LINES, ALLAHABAD	9335395183, 3250231	Mr. Hashmi
Uttar Pradesh	Allahabad	Radio Centre	SHOP NO-3 1ST FLOOR MEENA BAZAR, Allahabad	3292488	Mr. Manish Khanna
Uttar Pradesh	Amroha	Shree Jee Traders	Bazar Zatt, Near Tehsil Moz, JPNagar AMROHA-244221	9319075289	Mr.Arun bhargav
Uttar Pradesh	Azamgarh	Rajasthan	ASIF GANJ, CHOWK, AZAMGARH-276001	223644	Mr.Tribhok Nath Jalaan
Uttar Pradesh	Badun	Customer Care Services	Plaza Market 1st Floor Near Chantaghar sixroad Badun.	9319697938	Mr. Nazim
Uttar Pradesh	Bala	Sankatha Communications	Mall Godam road D.S. Npandey Clinic Chowk Bala-277001. UP	9307637850	Mr. Manish
Uttar Pradesh	Barabanki	Yash Enterprises	Rashid Enclave, Mugal Darbar, First Floor, Nagar Palika Road, Barabanki	9336323714	Mr. Ajay Srivastava
Uttar Pradesh	Bareilly	Jai Infotech	SA-24 DEENDAYAL PURAM BAREILLY	3208484	Mr Rohit Tandon
Uttar Pradesh	Bareilly	Sapan Infotech	G - 64 A Kumar Complex, Near Gupta Watch Co, 116 Civil Lines, Bareilly	3297933	Mr Dhirendra Negi
Uttar Pradesh	Basti	Royal Enterprises	near ses agency, janta hotel, gandhi nagar, basti	9336784054	Mr. Deepak shrivastav
Uttar Pradesh	Bhadoi	Kislay Communication	Station Road, Near Narmada Girls Inter College, Bhadohi-221401	9235506029	MrKislay
Uttar Pradesh	Bijnor	Konark Service Centre	Shop No.7, 1st Floor, Near Ajaz Ali Hall, Nagar Palika Complex, Bijnor-246701	9358364067	MrPratyush Gupta

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Uttar Pradesh	Bulandshahr	MIN Telecom	Shop No-1 BHARAMAPUTRA COMPLEX, KALA AM, Bulandshahr	9358011688	Mr Taurik Khan
Uttar Pradesh	Chandousi	Om Technologies	697, SITA ROAD, NEAR GANESH MANDIR, CHANDOUSI - 202412	9359986766	Mr.Sachin Gupta
Uttar Pradesh	Deoria	Atharav Communication	SHOP NO 5, SHANTI COMPLEX, HANUMAN MANDIR ROAD	9335226799	Mr.K.N.Gupta
Uttar Pradesh	Etah	Triveni Computer Service	688/1 Vijay Nagar, Infront of Shradha Cinema, Thandi Sadak, Etah-207001	9719398761	Mr.Vinod Kumar
Uttar Pradesh	Etawah	Frontline Computer	132, Sivil lines, Pakka Talab X-ing, Opp. HeroHonda Showroom, Etawah-206001	9219404194	Mr.Puneet Kaushik
Uttar Pradesh	Faizabad	Microworld Computer Hardware Lab	1st floor, Baldev Plaza, Rekhaganj, Faizabad	395744	Mr.Kapil/Sunil
Uttar Pradesh	Farrukhabad	Wave Technologies	2 B /122 AWAS VIKAS, LOHIA PURAM, FARRUKHABAD-209625	9335921175	Mr.Dharamveer
Uttar Pradesh	Fatehpur	Trimurti Telecom Services	230, SHADIPUR CHAJURAHA, NASEPEER ROAD, FATEHPUR-212601	9336223093	Mr.Sanjay Sachan
Uttar Pradesh	Ghaziabad	Azure Systems	F-28 Konark Building, RDC, Raj nagar GZB	2700717	Mr.Aseem Saraswat
Uttar Pradesh	Ghaziabad	Concessionair Documentation India Pvt Ltd (Cdi)	C-83, Rajnagar District Center (RDC), Ghaziabad	3292011	Mr.Anil Tiwari
Uttar Pradesh	Gonda	Digitech Services	Suraj Complex Malviya Nagar, Ground Floor, In front of Distt. Mahila Hospital, Gonda	9336695719	Mr.Atul Singh Chauhan
Uttar Pradesh	Gorakhpur	Eternal Electronics	Shop No.11, Pandey Complex, 33, Kasya Road, Opp DIG Bungalow, Gorakhpur - 273001	9336410222	Mr. Ajith
Uttar Pradesh	Gorakhpur	MM Communication	Udai Trade Centre, Opp Dr H.N.Singh Medical College road, Basharatpur, Gorakhpur	3250395	Mr.Ashwani
Uttar Pradesh	Hapur	Smart Solutions	10, 1st Floor, City Plaza, Hapur, Ghaziabad - 388001	9219659957	Mr.Rajkumar Kanooja
Uttar Pradesh	Hardoi	Shipra Electricals & Appliances	SHOP No.7 RD PLAZA, INFRONT OF VADIK VIDHYA MANDIR, NEAR AGARWAL DHRAMSALA & HOTEL UTSAV, CIRCULAR ROAD, HARDOI-241001	222384	Mr.Gaurav
Uttar Pradesh	Hathras	Arya Electricals	Bldg No.2206, Near Mayfair Hotel, Kamla Bazar, Hathras-204101	9319338655	Mr.Suneeet Arya
Uttar Pradesh	Jaunpur	Shubham Pustakalya	Mandi Naseeb Khan, Near Siya College, Jaunpur	9336510130	Mr.Sudhir/Sanjay
Uttar Pradesh	Jaunpur	Supreme Communication	J.P. Complex, Oland Ganj, Jaunpur	9235407278	Mr.Mahatab Raja Beg
Uttar Pradesh	Jhansi	Krishna Enterprises	372/A CIVIL LINES, GWALIAR ROAD, JHANSI-284001	9335090997	Mr.Sujeet

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Uttar Pradesh	Kannoj	Divot Mobile Lab	SHOP NO. A1 WARSI COMPLEX, LAKHAN TIRAHA, KANNOJ	9335042373	Mr.Suni Divot
Uttar Pradesh	Kanpur	Aakarsh Electronics	63/2 C(9)BALAJI COMPLEX, THE MALL, KANPUR	9335360303	Mr.Raman
Uttar Pradesh	Kanpur	LB Infotech	111A/409 1st floor, 80-ft road, ashok nagar, kanpur	3207303	Mr.Deepak Bhatia
Uttar Pradesh	Kasganj	Prem Computer Services	Roop Complex, Nadrai Gate, Kasganj-207123	9837403904	McVinay Agawal
Uttar Pradesh	Khatauli	Sigma Systems	A-6, Shivok Market, Near Indra Murti, G.T.Road, Khatauli-388001	9319666000	Mr.Alok Kumar
Uttar Pradesh	Lakhimpur	S S Electronics	GUJRDARSHAN BUILDING, KACHEHRI ROAD, LAKIMPUR KHERI, LAKHIMPUR -262701	9335038258	Mr.Saurabh Sinha
Uttar Pradesh	Lucknow	Alfa Electronics	Shop No.GF20 ABC Complex, Kanpur Road, Lucknow	3248730	Mr.Harjinder Singh
Uttar Pradesh	Lucknow	Hitech Communication	SS 205, Cross road Plaza, Badshah Nagar Crossing, Lucknow.	9335088061	Mr.Ravi Prakash
Uttar Pradesh	Lucknow	Mobile Dot Com	shop no. 111, 1st floor, Shri Ram Towers, Ashok Marg, Lucknow	9335819202	Mr Anand Jhouri/ Archana
Uttar Pradesh	Lucknow	Net Com	3 way road, City Point, Opp Krishi Bhawan, Lucknow-226024	3294222	McVinod Sharma
Uttar Pradesh	Lucknow	RR Enterprises	Shop No.3, first floor, Deewan Chand Complex, 292/11 Chowk, Lucknow	3262263	Mr.Rohan/Yogesh
Uttar Pradesh	Mainpuri	Raj Communication	1002, Sadar Bazar, Near PNB, Mainpuri-205001 (I.P)	9358090251	Mr.Rishabh Khambat
Uttar Pradesh	Mathura	R K Infocare	G-1, Atithya Palace, Sonkh Adda, Junction Road, Mathura-281001	3292274	Mr.Alok Gupta
Uttar Pradesh	Meerut	Care Centre	G-19, Vardaman Plaza, Garh Road, Meerut-250005	3258427 / 4005019	Mr.Ajay Mittal
Uttar Pradesh	Meerut	Coicap Services	Labour Compound, Above Allahabad Bank, Near Akash Ganga Jewellers, Begum Bridge, Meerut	2667942	Mr.Atul Mittal
Uttar Pradesh	Meerut	Essar Services	F-132-1333, 1st Floor, Ganga Plaza, Begum Bridge Road, Meerut-250001.	4025863 / 9837067894	Mr.Rajiv Gupta
Uttar Pradesh	MIRZAPUR	Singh Cyber	IMARTI ROAD, OPP- LIC OFFICE, MIRJAPUR-231001	9335205600	MR.Anup Singh
Uttar Pradesh	Modinagar	Ananya Communications	24, K.N.MODI COMPLEX, Modinagar-201204	325424	McNitin
Uttar Pradesh	Moradabad	Bharya Technologies	A12, 1st Floor, Rampur Road, Gandhi Nagar, Moradabad	3292318	McVivek Kumar Singh
Uttar Pradesh	Mugalasari	Sky Mobile World	SUPER MARKET, MUGALSARAI	9335251754	McVibhuti Jaiswal
Uttar Pradesh	Muzaffarnagar	Advance Series	Shop No-15 prakash chowk Muzaffarnagar-251001	9412210142	Mr Rajiv

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Uttar Pradesh	Muzaffarnagar	Jai Computers	Shop No. 4, 1st Floor, Roorkee road, Near Shiv Chowk, Central Bank Mkt, Muzaffarnagar-251001	3294447	McManohar Singh
Uttar Pradesh	Noida	M R Telecom	D-329, Sector 10, Noida, (Corner Building, Noida Stadium - Jhundpara Main Road)	4312715	McKailash Aggarwal
Uttar Pradesh	Pilibhit	Kamal Electronics	Station Road, Pilibhit	9319911226	Mc M A Jillani
Uttar Pradesh	Pratapgarh	Chandra Pratap Veer & Co	KATCHERY ROAD, CHOWK BAZAR, PRATAPGARH -230001	9335050301	McRajesh Aggarwal
Uttar Pradesh	Rai Bareilly	Karuna Enterprises	Shop No.6 & 7, City Complex, Kachary Road, Raebareilly	9336005741	McVikas
Uttar Pradesh	Rampur	Mamta Technologies	3Fs Shopping Complex, Rahe Murtaza Road, Civil Lines, Rampur-244901	3294923	McRajeev Yadav
Uttar Pradesh	Saharanpur	Maharaj Communications	1st Floor, Pradeep Hotel Compound, Court Road, Near Indiam bankSaharanpur-247001	3250239	McPankaj Malhotra
Uttar Pradesh	Shahjahanpur	Sunny Mobile Point	258 B TARIN BAHADURGANJ, SHAHJANPUR	9335019616	McRajaram Maurya
Uttar Pradesh	Sitapur	Higrade Computers	7, Muncpal Market, Sitapur	9936819899	McSanjeev Goel
Uttar Pradesh	Sultanpur	S S Infocom	SHOP NO. 14&15 NANDINI COMPLEX NEAR SUPER MARKET SULTANPUR-228001	9335055217	McSachin Dwivedi/Abhinav
Uttar Pradesh	Unnao	Avijit Infocom	251 Opp Collector Ganj, Unnao-209801	6820020	McVishnu Pandey
Uttar Pradesh	Varanasi	Jaiswal Electronics	SIDDHARTH COPMPLEX, C-2/10-A, Ramkatora, Near Petrol Pump Lahurabi, Varanasi-221001	9335407000	McSujeet
Uttar Pradesh	Varanasi	Shivam Mobile Distributers	Shop No.5, B37/115-B-1 Baradari Complex, Rathiyatra Crossing, Varansi Pin 221010	9335418998	McRakesh kumar singh
Uttaranchal	Almora	Kumar Telecommunications	Paltan Bazaar, Almora	9411525789	Mc S Kumar
Uttaranchal	Dehradun	Krishna Communication	Shop No 15A, Meedo Plaza, Rajpur Road, Dehradun, Uttaranchal-248001	09358112922 / 09358119696	McVinod
Uttaranchal	Haldwani	Faideal Agencies	1st Floor, Naimital Road, Uttaranchal Trade Centre, Tikonia Chouraha, Tikonia, Haldwani	282116	McAjay Gupta
Uttaranchal	Haridwar	Maharaj Computer Services	B-7, Royal Plaza, Ranipur Mod, Haridwar	9359209901	Mc Kamal Sachdeva
Uttaranchal	Kashipur	Tirpti Communications	Station Road, Main Market, Udamsingh Nagar	935900000	McAjay Gupta
Uttaranchal	Roorkee	Geetanjali Telecom	Shop No.6, Shyam Market, BSM Tiraha, NehruNagar, Dehradun Road, Roorkee-247667.	326510	Mc Manish Kumar



STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
West Bengal	Asansol	Sky Computer & Telecom	Islam Market, Naruddin Road, Assansol-713301	2207719	Mr.Syed Arshad Ali
West Bengal	Behrampur	Chaitannya Enterprise	152, B B Sen Road, Sadar bazar, PO Behrampur, Distt Murshidabad, pin-742101	9333310161	Mr.Subhas Chandra Basak
West Bengal	Bolpur	Cyber World	59, SUPER MARKET, SANTINIKETAN ROAD, BOLPUR - 731204	252542	Mr.Kishor Kumar Mukherjee
West Bengal	Burdwan	San Infosys	27/1 C.T Road, East End, Burdwan -713103.	3290265	Mr.Sanjit Debnath
West Bengal	Durgapur	Digitech Service	Ashok Bhavan J.K.Pal Lane ,Benachity , Durgapur -713213	3293600	Mr.Pintu Chatterjee
West Bengal	Haldia	Digitronix	Holding no -25, PO Khanjanachak, PS Durgachak, Haldia, Dist- East Medinipur-721602	277277 / 9332987527	Mr.Suman Jana
West Bengal	Howrah	Joyram Infotech	51, Jessore Road, Habra Bazar, Das Market, Dist- 24th Pargana(North), PIN-743263	302399 / 329677	Mr. Malay Das
West Bengal	Katwa	Devarshi Mobile Communication	Bhutnath Tala, Besides Ram Bhavan, Post - Katwa, Burdwan - 713130	9333611904	Mr. Devananda Dutta
West Bengal	Kharagpur	S. J. Communication	Inda Main Road, Khudiram Ram Market, Kharagpur Shop No-53. Pin -721305	324056	Mr.Mr.Suman Jana
West Bengal	Kolkata	Benma Infosol Pvt Ltd.	P-168/1 CIT Road, Scheme VIII, KOLKATA 700 067	32943176	Mr.Anun Surana
West Bengal	Kolkata	Friends Communication	32(B) Barasat Road, N/L 15 no railgate, PO-nonachandanpukur, PS- Titagarh, Barrackpore, Dist- North 24PCS, PIN-743102	25921263	Mr.Anup Sarkar & Tarasankar Mukherjee
West Bengal	Kolkata	Jakson Engineering Pvt Ltd	Block-A, Shop-1, Ambika Vihar, 1/1 Hardutrai Chamaria Road, Howrah- 711001	32950383	Mr.PMukherjee
West Bengal	Kolkata	JP Computers	5B Ekdala Place, Kolkata - 700019	24401923	Mr.Somim Kabir
West Bengal	Kolkata	Skylink	8/1A, Little Russel Street, Calcutta-700071	32903814	Mr.H R Molla
West Bengal	Kolkata	Sun Mobile Service	15 B.T. Road, N/L Peikpara Bus Stop, Kolkata -700002	32505444	Mr.Vivek Kumar Gupta
West Bengal	Krishnanagar	Addya Electronics	Rajani mukharjee Lane, Krishna Nagar, Nadia-741101	2329355	Mr Arijit Sen
West Bengal	Malda	Deb Infotech	PIROJPUR WOMENS COLLEGE ROAD, MALDA-752101	9434345486	Mr.UTPAL DEY(DEBASIS)

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
West Bengal	Midnapore	Zerbit	VII- Parbatipur, P.O.-Tamluk, Dist- Purba Midnapur, PIN-721636	267476 / 9434110802	McChanakya Sengupta
West Bengal	Nadia	Prayash	30 SWAMI YIVAKNANDA SARANI, RANAGHAT, DIST-NADIA,	9333515949	Mr. Amar Nath Mallick
West Bengal	North 24 Parganas	M/s Telelink	Bashirhat Old Market(Bowbazar) ,Bashirhat Dist, North 24pgs, Pin-743411	325499	Mr. Sukanta Debnath.
West Bengal	North 24 Parganas	Molina Traders	Jessore Road, Bongoan, Dist- North 24 th Pargana, PIN-743235	325433	Mr. Subir Dutta
West Bengal	Purulia	IT POINT	N.C DAS GUPTA ROAD, 2ND FLOOR, SONARTARI APPT(NAMO PARA), PURULIA - 723101	9333441065	Mr.Pinaki Roy Choudhary
West Bengal	Serampore	Sri Guru Mobile Service	87 B/15 G.T.Road (West), Hooghly Pin-712203	32528581	Mr.Shyamal Kumar Das
West Bengal	Siliguri	Care	sumantra bhawan.S.B.I hakim para building, 160/1030 Haren Mukharejee Road, siliguri-734001	6450515	McSnjoy Dutta

	<b>SERVICE</b>
	<b>1800-180-9999*</b>
<small>*MTNL / BSNL **Prefix STD Code</small>	<b>39-01-0909**</b>