

OPEN AIR COOLERS

**OP MINI**

Key Features

- Smallest Floor Standing Open Air Unit
- Custom Designed for Easy Product Access
- Small Footprint for Flexible Placement
- Bright Interior Lighting
- Electronic Temperature Control
- Automatic Defrost and Heated Drain Pan
- Adjustable Dual Position Shelves
- High Impact Graphics Available



Model	Doors	Capacity cu.ft (lt)	Shelves	Exterior Dimensions inches (mm)			Interior Dimensions inches (mm)			Power (V-Hz-Ph)	Amps	HP	Crated Weight lbs (kg)
				L	D	H	L	D	H				
OP MINI	NA	3 1/8 (87.3)	2	18 1/4 (460)	20 3/8 (520)	48 3/8 (1230)	14 1/2 (370)	13 (330)	28 1/2 (725)	115.60.1	9	3/8	135 (61)

## Details

### Cabinet Construction

- Exterior: Galvanized metal cabinet with impact resistant extruded plastic accent panels - gray.
- Large low-E double pane tempered thermal glass side panels for increased product visibility.
- Interior: Epoxy powder coated steel for increased durability and easy cleaning.
- High-density, CFC-Free, polyurethane insulation.
- Four (4) low profile adjustable feet.

### Shelving

- Two (2) adjustable galvanized wire shelves:
  - Upper: 14 ½" x 8 ¾" (370 x 224)
  - Lower: 14 ½" x 10 ¾" (370 x 274)
- Shelves are dual position allowing for horizontal or gravity fed positions and are adjustable in 3/8" inch increments.

### Lighting

- Fluorescent overhead light provides for maximum illumination of products.
- Utilizes a T8 bulb and an electronic ballast for increased energy efficiency and extended life.

### Electrical

- Ready for connection to 115V/60Hz single phase 20 amp dedicated outlet.
- Includes an 8' cord and plug set.



**NEMA 5-15R**

### Refrigeration System

- Self-contained environmentally-friendly refrigeration system using CFC-free R134A refrigerant.
- Self-contained heated drain pan and condensate evaporation system.
- Automatic self-defrost cycle.
- Electronic temperature control maintains 34°F to 41°F (1°C to 5°C).
- Bottom-mounted refrigeration unit slides out for easy maintenance and service.


### Recommended Operating Conditions

- This unit is best suited for an environment where temperatures remain below 80°F (24°C) and humidity does not exceed 55%.
- Open Air models should not be installed in any area where the air curtain will be frequently disrupted. This includes placement near an HVAC vent, open doorway, or fan.
- Areas with direct sunlight should also be avoided.

### Options

- 208-230V/ 50Hz
- Custom Graphics
- Additional Shelves
- Heavy Duty Casters
- Various Cabinet Colors

## Technical Drawing

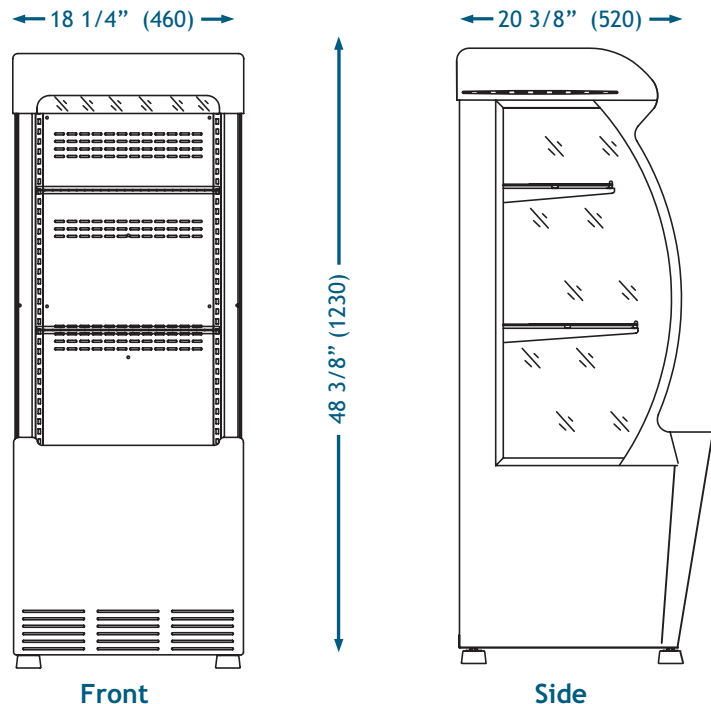

**OP MINI**



3235 Industry Drive • Suite C  
North Charleston, SC 29418  
Phone: 843-767-6855  
Toll Free: 800-905-4768

Fax: 843-767-6858  
Toll Free Fax: 800-906-4768  
www.atcgroup.net  
sales@atcgroup.net

### WARRANTY

One year warranty on all parts and labor and an additional 4 year prorated warranty on compressor.