

**vtech**<sup>®</sup>  
Innovation Beyond Technology™



User's manual

[www.vtechcanada.com](http://www.vtechcanada.com)

Model:  
LS6117-18

**DECT 6.0**

# **Congratulations**

on purchasing your new VTech product.  
Before using this telephone, please read the  
**Important safety instructions**  
on page 34 of this manual.

This manual has all the feature operations and troubleshooting necessary to install and operate your new VTech telephone. Please review this manual thoroughly to ensure proper installation and operation of this innovative and feature rich VTech product. For support, shopping, and everything new at VTech, visit our website at [www.vtechcanada.com](http://www.vtechcanada.com).

In the US, please visit [www.vtechphones.com](http://www.vtechphones.com).



The ENERGY STAR<sup>®</sup> program ([www.energystar.gov](http://www.energystar.gov)) recognizes and encourages the use of products that save energy and help protect our environment. We are proud to mark this product with the ENERGY STAR<sup>®</sup> label indicating it meets the latest energy efficiency guidelines.

# Table of contents

<b>Getting started</b> . . . . .	<b>1</b>	Find handset . . . . .	13
Parts checklist . . . . .	1	Chain dialing . . . . .	14
Telephone base installation . . . . .	2	Directory . . . . .	15
Battery installation and charging . . . . .	3	Store a directory entry . . . . .	16
Install an image. . . . .	5	Character chart . . . . .	17
Handset layout . . . . .	6	Search the directory . . . . .	18
Telephone base layout . . . . .	7	Dial a directory entry . . . . .	18
<b>Telephone settings</b> . . . . .	<b>8</b>	Edit a directory entry . . . . .	19
Ringer volume . . . . .	8	Delete from the directory . . . . .	20
Ringer tone . . . . .	9	About caller ID . . . . .	21
Key tone . . . . .	10	Call log . . . . .	22
Language . . . . .	10	Review the call log . . . . .	23
Clear voicemail . . . . .	11	Make a call log entry ready to dial . . . . .	24
<b>Telephone operation</b> . . . . .	<b>12</b>	Dial a call log entry . . . . .	24
Make a call . . . . .	12	Save an entry to the directory . . . . .	25
Answer a call . . . . .	12	Delete from the call log . . . . .	26
End a call . . . . .	12	Call log display screen messages . . . . .	27
Mute . . . . .	12	Redial list . . . . .	28
Ringer mute. . . . .	13	Dial a redial entry . . . . .	28
Call waiting . . . . .	13	Delete from redial. . . . .	28
Volume . . . . .	13		

# Table of contents

<b>Appendix. . . . .</b>	<b>.29</b>
Handset display screen messages . . . . .	.29
Handset and telephone base indicators . . . . .	.31
Battery . . . . .	.33
Important safety instructions . . . . .	.34
Troubleshooting. . . . .	.35
Operating range . . . . .	.44
Maintenance . . . . .	.44
About cordless telephones . . . . .	.45
The RBRC® seal . . . . .	.45
Warranty . . . . .	.46
FCC, ACTA and IC regulations . . . . .	.48
Technical specifications . . . . .	.50
Index . . . . .	.51

# Getting started

## Parts checklist

Your telephone contains the following items. Save your sales receipt and original packaging in the event warranty service is necessary.



1. Handset



2. Transparent image cover



3. Battery compartment cover




4. Battery




5. Telephone line cord



6. Telephone base power adapter



7. Telephone base



8. User's manual



9. Images

### note

- To purchase a replacement battery or power adapter, visit our website at [www.vtechcanada.com](http://www.vtechcanada.com) or call 1 (800) 267-7377. In the US, go to [www.vtechphones.com](http://www.vtechphones.com) or call 1 (800) 595-9511.


## note

- Use only the power adapter supplied with this product. To order a replacement, visit our website at [www.vtechcanada.com](http://www.vtechcanada.com) or call 1 (800) 267-7377. In the US, go to [www.vtechphones.com](http://www.vtechphones.com) or call 1 (800) 595-9511.
- The power adapter is intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if it is plugged into a ceiling or an under-the-table/ cabinet outlet.

## Getting started

### Telephone base installation

Install the telephone base as shown below. The telephone base is designed for desk or tabletop use only. Make sure that the electrical outlet is not controlled by a wall switch. If you subscribe to Digital Subscriber Line (DSL) high-speed Internet service through your telephone line, you must have a DSL filter between the telephone base and the telephone wall jack. The filter prevents noise and caller ID problems caused by DSL interference. Please contact your DSL service provider for more information about DSL filters.

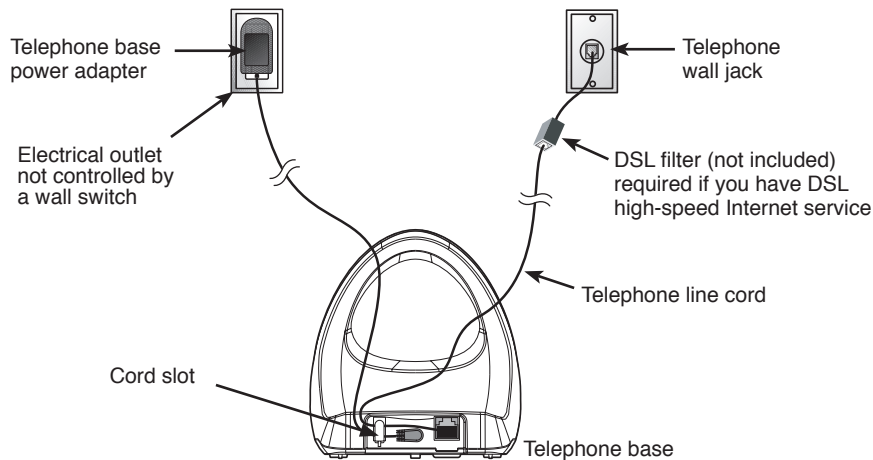

# Getting started

## Battery installation and charging

1. Perform steps 2 through 5 if the transparent image cover is attached. If the transparent image cover is off, go to step 6.
2. Remove the transparent image cover by holding the handset in your right hand with the back facing up and the **CHARGE** light to the left as shown in Figure 1.
3. Push the top center of the transparent image cover to the right with your left thumb until it unlocks.
4. Lift the transparent image cover away from the handset.
5. Remove the battery compartment cover by sliding it to the right as shown in Figure 2.
6. Match the color of the battery wires to the color-coded label located inside the handset compartment on the back of the handset, as shown in Figure 3.
7. Insert the battery plug securely onto the connector.
8. Place the battery in the compartment with the label **THIS SIDE UP** facing up and the wires inside the battery compartment as shown in Figure 4.
9. Replace the battery compartment cover by aligning the battery cover tabs with the slots in the battery compartment and sliding the cover towards the **CHARGE** light until it clicks into place.

**CHARGE** light



Figure 1:  
Remove image cover




Figure 2:  
Remove battery  
compartment cover




Figure 3:  
Insert battery plug



Figure 4:  
Insert battery

### note

- If the handset will not be used for a long time, disconnect and remove the battery to prevent possible leakage.
- To purchase a replacement battery, visit our website at [www.vtechcanada.com](http://www.vtechcanada.com) or call 1 (800) 267-7377. In the US, go to [www.vtechphones.com](http://www.vtechphones.com) or call 1 (800) 595-9511.

## note


- The handset battery will charge if you place the handset in the telephone base with either the front or back facing out to show off the insert as shown in Figure 6.

## Getting started

10. If you wish to add an image to the transparent image cover, go to **Install an image** on page 5.
11. Replace the transparent image cover by placing it flat against the handset and sliding it towards the **CHARGE** light until it clicks into place as shown in Figure 5.
12. Charge the handset by placing it in the telephone base. The handset charge light will be on when correctly placed in the telephone base.

### Caution:

If the charge light does not come on, remove the handset from the telephone base and make sure that the transparent image cover is on correctly. The cover must click into place to be seated properly.

The battery may have enough charge for short calls. For best performance, charge the handset for at least 16 hours. When the battery power is low, the handset will beep; **LOW BATTERY** will be displayed and  will flash on the handset screen. Place the handset in the telephone base to charge the battery when not in use. When fully charged, the handset battery provides approximately eight hours of talk time or four and a half days of standby time.




Figure 5:  
Replace transparent image cover

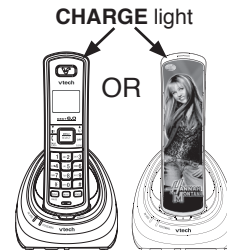



Figure 6:  
Handset charging positions



## Getting started

### Install an image

1. Perform steps 2 through 9 of the **Battery installation and charging** procedure on page 3.
2. Use the enclosed template to cut the desired image so that it fits into the transparent image cover.
3. Place the selected image inside the transparent image cover.
4. Place the image face down inside the transparent image cover with the top of the image at the end with the large tab.
5. Replace the transparent image cover by placing it flat against the handset and sliding it towards the **CHARGE** light until it clicks into place as shown in the figure.
6. Charge the handset by placing it in the telephone base. The handset **CHARGE** light will be on when correctly placed in the telephone base.



#### note

- You can also go [www.vtechcanada.com](http://www.vtechcanada.com) and use the online tool to create your own custom graphic inserts.

# Getting started

## Handset layout

### MENU/SELECT

- Press to display the menu.
- When in the menu, press to select an item, or save an entry or setting.

### ▼ CID (Caller ID)

- Press to review the call log when the phone is not in use.
- While in the menu, press to scroll down.
- Press to lower the listening volume during a call.

### ( TALK/FLASH

- Press to make or answer a call.
- During a call, press to answer a second call when you hear a call waiting alert.

### MUTE

- While on a call, press to mute the microphone.

### REDIAL/PAUSE

- Press to review the redial list.
- While dialing or entering numbers into the directory, press and hold to insert a dialing pause.

### CHARGE light

- On when the handset is charging in the telephone base.

### ▲ (Directory)

- Press to display the directory when the phone is not in use.
- While in the menu, press to scroll up.
- Press to raise the listening volume during a call.

### OFF/CLEAR


- During a call, press to hang up.
- While the handset is ringing, press to silence the ringer.
- Press and hold when the phone is not in use to erase the **MISSED CALLS** display.
- During programming, press to return to the previous menu without making changes.

### #

- Press repeatedly to display other dialing options when reviewing the call log.

### REMOVE

- While reviewing the call log, press to delete an individual entry, or press and hold to delete the entire call log.
- Press to delete digits when predialing (entering the phone number before pressing ( TALK/FLASH).

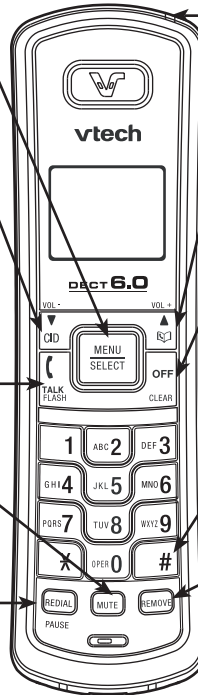

# Getting started


## Telephone base layout

### **IN USE light**

- Flashes when there is an incoming call or another telephone on the same line is in use.
- On when the handset is in use.

### **VOICEMAIL light**


- Flashes when you have new voicemail. Voicemail is offered by your telephone service provider.

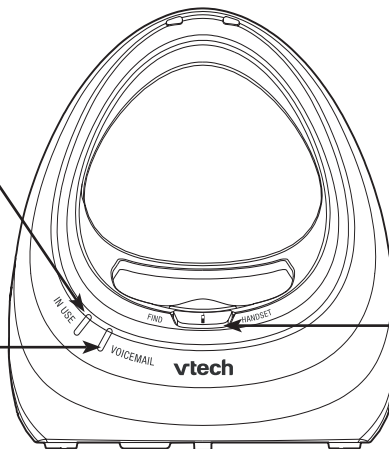

### **FIND HANDSET**

- Press to page the handset.

## note

- The ringer volume will be off if the volume is set to the lowest level, and a ringer off icon  will be displayed.


# Telephone settings

## Ringer volume


You can change the handset ringer volume to a comfortable level. The ringer can also be turned off so the telephone does not ring when there are incoming calls.

To adjust the ringer volume:

1. Press **MENU/SELECT** to display the menu when the handset is not in use.
2. Press **▲** or **▼** to select **>RINGER VOLUME**, then press **MENU/SELECT**.
3. Press **▲** or **▼** to adjust the volume. A sample of each volume level will be played as you adjust it.
4. Press **MENU/SELECT** to save your selection. You will hear a confirmation tone.



```
>RINGER VOLUME  
RINGER TONE
```



```
RINGER VOLUME  
■■■
```

# Telephone settings

## Ringer tone

This menu allows you to choose from different ringer tones.

To choose a ringer tone:

1. Press **MENU/SELECT** to display the menu when the handset is not in use.
2. Press **▲** or **▼** to select **>RINGER TONE**, then press **MENU/SELECT**.
3. Press **▲** or **▼** to select the desired ringer tone. A sample of each ringer tone will be played when scrolling through the choices.
4. Press **MENU/SELECT** to save your selection. You will hear a confirmation tone.

```
>RINGER TONE  
KEY TONE
```

```
RINGER TONE  
1
```

### note

- If the ringer volume is turned off while scrolling through the options in the **RINGER TONE** menu, the sample of the ringer will not be heard.

## Telephone settings


### Key tone

The handset beeps as you press keys. You may turn the key tone feature on or off. To change the setting:

1. Press **MENU/SELECT** to display the menu when the handset is not in use.
2. Press **▲** or **▼** to select **>KEY TONE**, then press **MENU/SELECT**.
3. Press **▲** or **▼** to choose **ON** or **OFF**.
4. Press **MENU/SELECT** to save your selection. You will hear a confirmation tone.



KEY TONE  
LANGUAGE



KEY TONE  
ON

### Language

You can select **ENGLISH**, **FRANÇAIS** or **ESPAÑOL** to be used for the handset display. To change the setting:

1. Press **MENU/SELECT** to display the menu when the handset is not in use.
2. Press **▲** or **▼** to select **>LANGUAGE**, then press **MENU/SELECT**.
3. Press **▲** or **▼** to select the desired language.
4. Press **MENU/SELECT** to save your selection. You will hear a confirmation tone.




LANGUAGE  
CLR VOICE MAIL



LANGUAGE  
ENGLISH

## Telephone settings

### Clear voice mail

If you subscribe to voicemail service offered by your telephone service provider, **NEW VOICE MAIL** and  will appear on the handset, and the **VOICEMAIL** light on the telephone base will flash when you have new voicemail messages. Please contact your local telephone company for more information and assistance about using your voicemail service.

After you have listened to all new voicemail messages, the indicators on both the handset and telephone base will be turned off automatically.

Use the clear voicemail feature when the telephone indicates that there is new voicemail but there is none (for example, when you have accessed your voicemail from a different telephone line while away from home). Clearing the voicemail waiting indicator only turns off the indicators; it does not delete your voicemail message(s). If there actually are new voicemail messages, your local telephone company will continue to send the signal which will turn the indicators back on.

To manually turn off these indicators:

1. Press **MENU/SELECT** to display the menu when the handset is not in use.
2. Press **▲** or **▼** to select **>CLR VOICE MAIL**, then press **MENU/SELECT**. The screen displays **TURN INDICATOR OFF?**
3. Press **MENU/SELECT** to confirm your selection. You will hear a confirmation tone.

```
>CLR VOICE MAIL
  DIRECTORY
```

```
TURN INDICATOR
  OFF?
```

### note

- Your telephone service provider may alert you to new messages with a stutter (broken) dial tone. Contact your service provider for more details.

## note

- The screen displays the elapsed time as you talk (in hours, minutes and seconds).
- When predialing (entering the phone number before pressing **TALK/FLASH**), press **REMOVE** or **OFF/CLEAR** to backspace and delete; **press and hold REDIAL/PAUSE** to insert a dialing pause.


## Telephone operation

### Make a call

1. Press **TALK/FLASH**.
2. Dial the number.

**-OR-**

1. Dial the number.
2. Press **TALK/FLASH**.



### Answer a call

- Press **TALK/FLASH** or any of the dialing keys (**0-9, #, \***).




### End a call

- Press **OFF/CLEAR**, or put the handset in the telephone base.

### Mute

The mute feature allows you to hear the other party while the other party cannot hear you.

1. During a call, press **MUTE** on the handset. **MUTED** will be temporarily displayed on the screen, along with the smaller **MUTE** icon.
2. Press **MUTE** again to resume the conversation. **MICROPHONE ON** will be temporarily displayed on the screen.






# Telephone operation

## Ringer mute


You can mute the ringer temporarily when the telephone is ringing.

- Press **OFF/CLEAR** or **MUTE** to temporarily silence the ringer. The next call will ring normally.



## Call waiting

If you subscribe to call waiting service from your telephone company, you will hear an alert tone if there is an incoming call while you're on another call. Press **TALK/FLASH** to answer the new incoming call. Press **TALK/FLASH** again to return to the original call.





## Volume

During a call, press **▲** or **▼** **CID** to adjust the listening volume to a comfortable level.

## Find handset

This feature allows the telephone base to page the handset.

1. Press **FIND HANDSET** on the telephone base. The handset will ring and its screen displays **\*\* PAGING \*\***.
2. Press **FIND HANDSET** again on the telephone base to stop paging, or press **TALK/FLASH** or any dialing keys (**0-9**, **#**, **\***) on the handset.



## note

- Chain dialing can be useful if you wish to store numbers other than phone numbers (such as bank account information or access codes) in the directory.

# Telephone operation

## Chain dialing

This feature allows you to dial numbers stored in the directory, call log or redial list while you are on a call.

To dial a number in the directory:

1. Press **MENU/SELECT** twice to enter the directory menu.
2. Scroll by pressing **▲** or **▼** to find the desired entry.
3. Press **MENU/SELECT** to dial the desired number when it is displayed.

To dial a number in the call log:

1. Press **MENU/SELECT** and then press **▼** to select **>CALL LOG**.
2. Press **MENU/SELECT** to confirm.
3. Scroll by pressing **▲** or **▼** to find the desired entry.
4. Press **MENU/SELECT** to dial the desired number when it is displayed.


To dial the last number in the redial list:

- Press **REDIAL/PAUSE** to dial.
- Press **REDIAL/PAUSE** again within two seconds to cancel the chain dialing.

# Telephone operation

## Directory

The directory can store up to 50 entries. Each entry may have up to 30 digits and 15 characters.

- The directory can be accessed when the handset is not in use by pressing ▲  once or **MENU/SELECT** three times.
- The screen displays **DIRECTORY EMPTY** if there are no records in the directory.
- When the directory is full and you attempt to save an entry, the screen will display **LIST FULL**.
- If you attempt to save a number already stored in the directory, the screen will display **ALREADY SAVED**.
- If the telephone number in the directory exceeds 15 digits, < \* will be displayed in front of the telephone number. Press \* to scroll towards the end of the telephone number or press # to scroll towards the beginning of the telephone number.

DIRECTORY EMPTY

LIST FULL

ALREADY SAVED

ELIZABETH JONES  
< \* 180012345678

ELIZABETH JONES  
< \* 800123456 # >

ELIZABETH JONES  
123456789012 # >

# Telephone operation

## Store a directory entry


1. Press **MENU/SELECT** twice when the handset is not in use.
2. Press **▲** or **▼** to select **>STORE**, then press **MENU/SELECT**. The screen displays **ENTER NUMBER**.
3. Use the dialing keys to enter the number.
  - Press **REMOVE** to backspace and erase a digit.
  - Press and hold REMOVE to erase the entire entry.
  - Press **▼** to move the cursor to the left or **▲** to the right.
  - Press and hold REDIAL/PAUSE to insert a dialing pause.
4. Press **MENU/SELECT** to enter the name. The screen displays **ENTER NAME**.
5. Use the dialing keys (see the **Character chart** on page 17) to enter the name.
  - Press **REMOVE** to backspace and erase a character.
  - Press and hold REMOVE to erase the entire entry.
  - Press **▼** to move the cursor to the left or **▲** to the right.
  - Press **#** to insert a space.
6. Press **MENU/SELECT** to save your entry. You will hear a confirmation tone.




```
>DIRECTORY  
CALL LOG
```



```
>STORE  
REVIEW
```



```
ENTER NUMBER  
---
```



```
ENTER NAME  
--
```

# Telephone operation

## Character chart

Use the dial pad and the chart below to enter a name (up to 15 characters). Each press of a particular key causes the characters to be displayed in the following order:

Number key	Characters by number of key presses								
	1	2	3	4	5	6	7	8	9
1	1	#	'	,	-	.	&		
2	A	B	C	2	a	b	c		
3	D	E	F	3	d	e	f		
4	G	H	I	4	g	h	i		
5	J	K	L	5	j	k	l		
6	M	N	O	6	m	n	o		
7	P	Q	R	S	7	p	q	r	s
8	T	U	V	8	t	u	v		
9	W	X	Y	Z	9	w	x	y	z
0	0								
*	*	?	!	/	(	)	@		
#	space								

### note


- When entering a name in the directory, the first letter of each word will be capitalized automatically.

## Telephone operation


### Search the directory


Entries are sorted alphabetically.

To search the directory:

1. Press ▲  once, or **MENU/SELECT** three times to enter the directory.
2. Press ▲ or ▼ to scroll through the directory.

To start an alphabetical search:

1. Press ▲  once, or **MENU/SELECT** three times to enter the directory.
2. Use the dialing keys to enter the first letter associated. For example, press **5** (JKL) once to find Jenny, twice to find Kristen, or three times to find Linda. If there is no name entry matching your search, the next closest matching entry in alphabetical order will be displayed. If necessary, scroll ▲ or ▼ to find the desired entry.





>REVIEW  
STORE






VTECH  
800-595-9511

### Dial a directory entry

1. Press ▲  once, or **MENU/SELECT** three times to enter the directory.
2. Press ▲ or ▼ to scroll to the desired entry, or use the alphabetical search to find it.
3. Press  /**FLASH** to dial the entry.


## Telephone operation

### Edit a directory entry

1. Press **▲**  once, or **MENU/SELECT** three times to enter the directory.
2. Press **▲** or **▼** to scroll to the desired entry, or use the alphabetical search to find it.
3. Press **MENU/SELECT** to confirm your selection. The screen displays **EDIT NUMBER**.
4. Use the dialing keys to edit the number.
  - Press **REMOVE** to backspace and erase a digit.
  - Press and hold **REMOVE** to erase the entire entry.
  - Press **▼** to move the cursor to the left or **▲** to the right.
  - Press and hold **REDIAL/PAUSE** to insert a dialing pause.
5. Press **MENU/SELECT** to move on to the name. The screen displays **EDIT NAME**.
6. Use the dialing keys (see the **Character chart** on page 17) to edit the name.
  - Press **REMOVE** to backspace and erase a character.
  - Press and hold **REMOVE** to erase the entire entry.
  - Press **▼** to move the cursor to the left or **▲** to the right.
  - Press **#** to insert a space.
7. Press **MENU/SELECT** to save your edits. You will hear a confirmation tone.

## Telephone operation

### Delete from the directory

1. Press ▲  once, or **MENU/SELECT** three times to enter the directory.
2. Press ▲ or ▼ to scroll to the desired entry, or use the alphabetical search to find it.
3. Press **REMOVE** to remove the displayed entry. You will hear a confirmation tone.



## Telephone operation

### About caller ID

The caller ID with call waiting feature in this telephone lets you see the name and telephone number of the caller before answering the call, even when already on a call. These features require services provided by your local telephone company.

Contact your telephone company if:

- you have both caller ID and call waiting, but as separate services (you may need combined service),
- you have only caller ID service, or only call waiting service, or
- you do not subscribe to any caller ID or call waiting services but wish to subscribe.

You can use this telephone with regular caller ID service, and you can use its other features without subscribing to either caller ID or combined caller ID with call waiting service. There may be fees for these services, and these services may not be available in all areas.

The caller ID features will work only if both you and the caller are in areas offering caller ID service, and if both telephone companies use compatible equipment.

## note

- Due to regional service differences, the caller ID information may not be available for every incoming call. In addition, the callers may intentionally block their names and/or telephone numbers.

# Telephone operation

## Call log

If you subscribe to caller ID service, information about each caller will be displayed after the first or second ring.

- The call log can store up to 50 entries.
- You can review, redial, and copy an entry into the directory.
- Entries are displayed in reverse chronological order, i.e. from the most recent entry to the earliest entry.
- When the call log is full, the earliest entry is deleted to make room for new incoming call information.
- **XX MISSED CALL(S)** will be displayed if there are new call log entries (including missed and unreviewed calls). When all the missed calls in the call log have been reviewed, the missed calls indicator will no longer display.
- **CALL LOG EMPTY** will be displayed if there are no records in the call log.

```
HANDSET X  
XX MISSED CALLS
```

```
CALL LOG EMPTY
```

# Telephone operation

## Review the call log

1. Press ▼ **CID** when the handset is not in use.
2. Press ▲ or ▼ to browse through the call log.


**-OR-**

1. Press **MENU/SELECT** when the handset is not in use.
2. Press ▲ or ▼ to select **>CALL LOG**.
3. Press **MENU/SELECT**.
4. Press ▲ or ▼ to browse through the call log.

- The name (if available), telephone number, date and time of all incoming calls are displayed on the screen.
- There will be a double beep when you reach the beginning or end of the call log.
- Any caller ID record not previously reviewed will display the **NEW** icon above the date.



```
VTECH  
595-9511  
3:45PM 1/02
```



```
>CALL LOG  
RINGER VOLUME
```

## Telephone operation

### Make a call log entry ready to dial

Although the call log entries received have 10 digits (the area code plus the seven-digit number), in some areas you may need to dial only the seven digits, or a 1 plus the seven digits, or a 1 plus the area code plus the seven digits. You can change the number of digits that you dial from the call log.

While reviewing the call log, press **#** repeatedly to display different dialing options for local and long distance numbers before dialing or saving the telephone number in the directory. See the example on the right.

```
800-595-9511
1-800-595-9511
595-9511
1-595-9511
```

You may also press **1** repeatedly to add or remove a **1** in front of the telephone number before dialing or saving it in the directory. See the examples on the right.

```
595-9511
1-595-9511
```

When the number displayed is in the correct format for dialing, press **(TALK)/FLASH** to call the number.

```
800-595-9511
1-800-595-9511
```

### Dial a call log entry

1. When in the call log, press **▲** or **▼** to scroll to the desired entry.
2. If the displayed number is not ready to dial, press **#** until it is in the correct format.
3. Press **(TALK)/FLASH** to dial the entry.

# Telephone operation

## Save an entry to the directory

1. When in the call log, press ▲ or ▼ to scroll to the desired entry.
2. Press **MENU/SELECT**.
  - You can edit the phone number, if necessary. Make sure the number is in the correct dialing format for your area. Press **MENU/SELECT** when done. Now, edit the name. Press **MENU/SELECT** when done.
  - If the entry is already saved in the directory, the screen will display **ALREADY SAVED**.
  - If there is no caller ID information, the screen will display **UNABLE TO SAVE**.
3. Successful programming is indicated by **SAVED** on the handset display along with a confirmation tone.



ALREADY SAVED



UNABLE TO SAVE



SAVED

## Telephone operation

### Delete from the call log

To delete one entry:

1. When in the call log, press ▲ or ▼ to scroll to the desired entry.
2. Press **REMOVE** to delete the selected entry. You will hear a confirmation tone.

To delete all entries:

1. When in the call log, press ▲ or ▼ to scroll to the desired entry.
2. Press and hold **REMOVE** to delete the entire call log.
3. The screen displays **DELETE ALL CALLS?**
4. Press **MENU/SELECT** to confirm. You will hear a confirmation tone.

**- OR -**

Press **OFF/CLEAR** to return to the previous menu if you want to cancel the deletion.



DELETE ALL  
CALLS?

# Telephone operation

## Call log display screen messages


Displays:	When:
PRIVATE NAME	The caller is blocking the name information.
PRIVATE NUMBER	The caller is blocking the telephone number information.
PRIVATE CALLER	The caller is blocking the name and number information.
UNKNOWN NAME	This caller's name is unavailable.
UNKNOWN NUMBER	This caller's number is unavailable.
UNKNOWN CALLER	No information is available about this caller.

# Telephone operation

## Redial list

The telephone stores the five most recently dialed numbers on the redial list.

- Once there are five numbers stored on the redial list, the oldest entry will be deleted to make room for the new entry.
- Entries are displayed in reverse chronological order, i.e. from the newest entry to the oldest entry.



The redial list can be accessed by pressing **REDIAL/PAUSE** when the handset is not in use.

## Dial a redial entry

1. Press **REDIAL/PAUSE**, then press ▲, ▼ or **REDIAL/PAUSE** repeatedly to scroll to the desired number. You will hear a double beep when you reach the beginning or end of the redial list.
2. Press  $\overset{\text{TALK}}{\text{FLASH}}$  to dial the number.

## Delete from redial

1. Press **REDIAL/PAUSE**, then press ▲, ▼ or **REDIAL/PAUSE** repeatedly to scroll to the desired number.
2. Press **REMOVE** to delete the selected entry. You will hear a confirmation tone.



## Handset display screen messages

ALREADY SAVED	The telephone number you have entered is already stored in the directory.
CALL LOG EMPTY	There are no call log entries.
CONNECTING...	The cordless handset is searching for the telephone base.
CHARGING	A handset with low battery has been placed in the telephone base to recharge.
DIRECTORY EMPTY	There are no directory entries.
ENDED	You have just ended a call.
INCOMING CALL	There is an incoming call.
LINE IN USE	Another telephone on the same line is in use.
LIST FULL	The directory is full.
LOW BATTERY	The battery needs to be recharged.
MICROPHONE ON	<b>MUTE</b> has been turned off and the person on the other end can hear you.
MUTED	The microphone is muted temporarily during a conversation.
NEW VOICE MAIL	There are new voicemail messages from the local telephone company.

## Handset display screen messages

NO LINE	There is no telephone line connected.
NO SIGNAL, CALL ENDED	Communication between handset and telephone base is lost during a call.
** PAGING **	<b>FIND HANDSET</b> on the telephone base has been pressed.
PHONE	The handset is in use.
PLACE IN CHARGER	The battery is very low. The handset should be placed in the telephone base.
RINGER MUTE	The ringer is muted temporarily during incoming call.
SAVED	Your operation has been saved.
UNABLE TO SAVE	You are attempting to save caller ID entry with no name or number.
XX MISSED CALLS	There are unreviewed calls in your call log.

## Handset and telephone base indicators

### Handset lights




<b>CHARGE</b>	<ul style="list-style-type: none"><li>• On when the handset is in the telephone base and is charging.</li></ul>
---------------	---

### Telephone base lights

<b>IN USE</b>	<ul style="list-style-type: none"><li>• Flashes when there is an incoming call or another telephone on the same line is in use.</li><li>• On when the handset is in use.</li></ul>
<b>VOICEMAIL</b>	<ul style="list-style-type: none"><li>• Flashes when you have new voicemail. Voicemail is offered by your telephone service provider.</li></ul>

## Handset and telephone base indicators

### Handset icons

<b>MUTE</b>	<ul style="list-style-type: none"><li>• Microphone is muted.</li></ul>
	<ul style="list-style-type: none"><li>• Ringer off.</li></ul>
<b>NEW</b>	<ul style="list-style-type: none"><li>• New call log entries.</li></ul>
<b>NEW VOICE MAIL</b> 	<ul style="list-style-type: none"><li>• New voicemail received from the local telephone company.</li></ul>
<b>Battery indicator</b> 	<ul style="list-style-type: none"><li>• Cycles (low, medium, and full) when the handset battery is charging.</li><li>• Flashes when the battery is low and needs charging.</li><li>• Displays solid when the battery is fully charged.</li></ul>

# Battery

It takes up to 16 hours for the battery to be fully charged. When it is fully charged, you can expect the following performance:

Operation	Operating time
While in use (talking)	Eight hours
While not in use (standby*)	Four and a half days

\*Handset is off the telephone base but not in use.

The battery needs charging when:

- A new battery is installed in the handset.
- The handset beeps without buttons being pressed.
- **LOW BATTERY** is displayed and the battery indicator on the handset screen is flashing.

## CAUTION:

To reduce the risk of fire or injury, read and follow these instructions:

- Use only the batteries provided or equivalent. To order a replacement, visit our website at [www.vtechcanada.com](http://www.vtechcanada.com) or call 1 (800) 267-7377. In the US, go to [www.vtechphones.com](http://www.vtechphones.com) or call 1 (800) 595-9511.
- Do not dispose of the battery in a fire. They may explode. Check with local waste management codes for special disposal instructions.
- Do not open or mutilate the battery. Released electrolyte is corrosive and may cause burns or injury to the eyes or skin. The electrolyte may be toxic if swallowed.
- Exercise care in handling batteries in order not to create a short circuit with conductive materials such as rings, bracelets, and keys. The battery and/or conductor may overheat and cause burns.
- Charge the battery provided with or identified for use with this product only in accordance with the instructions and limitations specified in this manual.

## WARNING:

TO PREVENT FIRE OR SHOCK HAZARD, DO NOT EXPOSE THIS PRODUCT TO WATER OR ANY TYPE OF MOISTURE.

# Important safety instructions

When using your telephone equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury, including the following:

1. Read and understand all instructions.
2. Follow all warnings and instructions marked on the product.
3. Unplug this product from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning.
4. Do not use this product near water (for example, near a bathtub, kitchen sink, or swimming pool).
5. Do not place this product on an unstable table, shelf, stand or other unstable surfaces.
6. Slots and openings in the back or bottom of the telephone base and handset are provided for ventilation. To protect them from overheating, these openings must not be blocked by placing the product on a soft surface such as a bed, sofa or rug. This product should never be placed near or over a radiator or heat register. This product should not be placed in any area where proper ventilation is not provided.
7. This product should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power supply in your home, consult your dealer or local power company.
8. Do not allow anything to rest on the power cord. Do not install this product where the cord may be walked on.
9. Never push objects of any kind into this product through the slots in the telephone base or handset because they may touch dangerous voltage points or create a short circuit. Never spill liquid of any kind on the product.
10. To reduce the risk of electric shock, do not disassemble this product, but take it to an authorized service facility. Opening or removing parts of the telephone base or handset other than specified access doors may expose you to dangerous voltages or other risks. Incorrect reassembling can cause electric shock when the product is subsequently used.
11. Do not overload wall outlets and extension cords.
12. Unplug this product from the wall outlet and refer servicing to an authorized service facility under the following conditions:
  - A. When the power supply cord or plug is damaged or frayed.
  - B. If liquid has been spilled onto the product.
  - C. If the product has been exposed to rain or water.
  - D. If the product does not operate normally by following the operating instructions. Adjust only those controls that are covered by the operation instructions. Improper adjustment of other controls may result in damage and often requires extensive work by an authorized technician to restore the product to normal operation.
  - E. If the product has been dropped and the telephone base and/or handset has been damaged.
  - F. If the product exhibits a distinct change in performance.
13. Avoid using a telephone (other than cordless) during an electrical storm. There is a remote risk of electric shock from lightning.
14. Do not use the telephone to report a gas leak in the vicinity of the leak.
15. Only put the handset of your telephone next to your ear when it is in normal talk mode.
16. The power adapter is intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if it is plugged into a ceiling or an under-the-table/cabinet outlet.

**SAVE THESE INSTRUCTIONS**

## Troubleshooting

If you have difficulty with your telephone, please try the suggestions below. For Customer Service, visit our website at [www.vtechcanada.com](http://www.vtechcanada.com), or call 1 (800) 267-7377; in the US, call 1 (800) 595-9511.

Problem	Suggestion
My telephone does not work at all.	<ul style="list-style-type: none"><li>• Make sure the battery is installed and charged correctly (page 3). For optimum daily performance, return the handset to the telephone base after use.</li><li>• Make sure the power adapter is securely plugged into an outlet not controlled by a wall switch.</li><li>• Make sure the telephone line cord is plugged firmly into the telephone base and the telephone wall jack.</li><li>• Unplug the electrical power to the telephone base. Wait for approximately 15 seconds, then plug it back in. Allow up to one minute for the cordless handset and telephone base to synchronize.</li><li>• Charge the battery in the handset for up to 16 hours.</li><li>• Remove and re-insert the battery. If that still does not work, it may be necessary to purchase a new battery.</li><li>• Disconnect the telephone base from the telephone wall jack and plug in a working telephone. If the other telephone does not work, the problem is probably in the wiring or the local service. Call the local telephone company.</li></ul>
<b>LOW BATTERY</b> is displayed on screen.	<ul style="list-style-type: none"><li>• Place the handset in the telephone base for recharging.</li><li>• Remove and re-install the battery and use it normally until fully discharged, then recharge the handset on the telephone base for up to 16 hours.</li><li>• If the above measures do not correct the problem, the battery may need to be replaced.</li></ul>

## Troubleshooting

Problem	Suggestion
The battery does not charge in the handset or the handset battery is not charging.	<ul style="list-style-type: none"><li>• Make sure the handset is placed in the telephone base correctly. The <b>CHARGE</b> light on the handset should be on.</li><li>• If you attach the transparent image cover, make sure it is on correctly. If it is not, the handset may not charge when placed in the telephone base.</li><li>• Remove and reinstall the battery, then charge for up to 16 hours.</li><li>• If the handset is in the telephone base but the <b>CHARGE</b> light on the handset is not on, refer to <b>The CHARGE light is off</b> in this section.</li><li>• It may be necessary to purchase a new battery. Please refer to the <b>Battery</b> section (page 33) of this user's manual.</li></ul>
The <b>CHARGE</b> light is off.	<ul style="list-style-type: none"><li>• Clean the charging contacts on the handset and telephone base each month using a pencil eraser or a dry non-abrasive fabric.</li><li>• Make sure the power adapter and telephone line cord are plugged in correctly and securely.</li><li>• If you attach the transparent image cover, make sure it is on correctly. If it is not, the handset may not charge when placed in the telephone base.</li><li>• Unplug the power adapter. Wait for 15 seconds before plugging it back in. Allow up to one minute for the handset and telephone base to reset.</li></ul>
There is no dial tone.	<ul style="list-style-type: none"><li>• First, try all the above suggestions.</li><li>• Move the handset closer to the telephone base. It might be out of range.</li><li>• The telephone line cord might be malfunctioning. Try installing a new telephone line cord.</li><li>• Disconnect the telephone base from the telephone wall jack and connect a different telephone. If there is no dial tone on this telephone either, the problem is in your wiring or local service. Contact your local telephone company.</li></ul>



## Troubleshooting

Problem	Suggestion
The telephone does not ring when there is an incoming call.	<ul style="list-style-type: none"><li>• Make sure the ringer is on (page 8).</li><li>• Make sure the telephone line cord and power adapter are plugged in properly (page 2).</li><li>• The handset may be too far from the telephone base. Move it closer to the telephone base.</li><li>• There may be too many extension phones on the telephone line to allow all of them to ring simultaneously. Try unplugging some of them.</li><li>• If the other telephones in your home are having the same problem, the problem is in the wiring or local service. Contact the local telephone company (charges may apply).</li><li>• Other electronic products can cause interference to your cordless telephone. Try installing your telephone as far away as possible from the following electronic devices: wireless routers, radios, radio towers, pager towers, cellular telephones, digital telephones, intercoms, room monitors, televisions, VCRs, personal computers, kitchen appliances, and other cordless telephones.</li><li>• Test a working telephone at the telephone wall jack. If another telephone has the same problem, the problem is in the telephone wall jack. Contact your local telephone company (charges may apply).</li><li>• The telephone line cord might be malfunctioning. Try installing a new telephone line cord.</li><li>• Wait for the handset to synchronize with the telephone base. Allow up to one minute for this to take place.</li></ul>

## Troubleshooting

Problem	Suggestion
I cannot dial out.	<ul style="list-style-type: none"><li>• First, try all the above suggestions.</li><li>• Make sure there is a dial tone before dialing. It is normal if the handset takes a second or two to synchronize with the telephone before producing a dial tone. Wait an extra second before dialing.</li><li>• If the other telephones in your home are having the same problem, the problem is in the wiring or local service. Contact your local telephone company (charges may apply).</li><li>• Eliminate any background noise. Noise from a television, radio, or other appliances may cause the telephone not to dial out properly. If you cannot eliminate the background noise, first try muting the cordless handset before dialing, or dialing from another room in your home with less background noise.</li></ul>
My handset beeps and is not performing normally.	<ul style="list-style-type: none"><li>• Make sure the power cord is securely plugged into the telephone base. Plug the telephone base into a different working electrical outlet not controlled by a wall switch.</li><li>• Move the handset closer to the telephone base. It may be out of range.</li><li>• Reset the telephone base by unplugging the electrical power to the base. Wait for 15 seconds and plug it back in again. Allow up to one minute for the cordless handset and the telephone base to synchronize.</li><li>• Other electronic products can cause interference to your cordless telephone. Try installing your telephone as far away from these electronic devices as possible: wireless routers, radios, radio towers, pager towers, cellular telephones, intercoms, room monitors, televisions, personal computers, kitchen appliances and other cordless telephones.</li></ul>

## Troubleshooting

Problem	Suggestion
<p data-bbox="91 208 339 291">There is interference during a telephone conversation.</p> <p data-bbox="91 332 339 415">My calls fade out when I am using the cordless handset.</p>	<ul data-bbox="344 208 1320 830" style="list-style-type: none"><li data-bbox="344 208 1320 239">• The handset may be out of range. Move it closer to the telephone base.</li><li data-bbox="344 242 1320 325">• Do you have DSL service? If yes, you must have a DSL filter installed at every telephone wall jack that has a telephone connected to it (page 2). Contact your DSL service provider for DSL filters and installation instructions.</li><li data-bbox="344 328 1320 380">• Appliances or other cordless telephones plugged into the same circuit as the telephone base can cause interference. Try moving the appliance or telephone base to another outlet.</li><li data-bbox="344 383 1320 497">• Other electronic products can cause interference to your cordless telephone. Try installing your telephone as far away as possible from the following electronic devices: wireless routers, radios, radio towers, pager towers, cellular telephones, digital telephones, intercoms, room monitors, televisions, VCRs, personal computers, kitchen appliances, and other cordless telephones.</li><li data-bbox="344 500 1320 583">• If your telephone is plugged in with a modem or a surge protector, plug the telephone (or modem/surge protector) into a different location. If this solves the problem, relocate your telephone or modem farther apart from each other, or use a different surge protector.</li><li data-bbox="344 586 1320 669">• The layout of your home or office might be limiting the operating range. For better reception, try moving the telephone base to a central location within the home that has fewer obstructions between the telephone base and the handset.</li><li data-bbox="344 672 1320 755">• Disconnect the telephone base from the telephone wall jack and plug in a corded telephone. If calls are still not clear, the problem is probably in the wiring or local service. Contact your local service company (charges may apply).</li><li data-bbox="344 758 1320 830">• If the other telephones in your home are having the same problem, the problem is in the wiring or local service. Contact the local telephone company (charges may apply).</li></ul>

## Troubleshooting

Problem	Suggestion
I hear other calls when using the telephone.	<ul style="list-style-type: none"><li>• Disconnect the telephone base from the telephone wall jack. Plug in a different telephone. If you still hear other calls, the problem is probably in the wiring or local service. Call your local telephone company.</li></ul>
I hear noise on the cordless handset, and none of the keys or buttons works.	<ul style="list-style-type: none"><li>• Make sure the telephone line cord is plugged in securely.</li></ul>
My caller ID features are not working properly.	<ul style="list-style-type: none"><li>• Caller ID is a subscription service. You must subscribe to this service from your local telephone company for this feature to work on your telephone.</li><li>• The caller may not be calling from an area which supports caller ID.</li><li>• Both you and the caller's telephone companies must use equipment which are compatible with the caller ID service.</li><li>• The caller ID information will be displayed after the first or second ring. Caller ID data may not be displayed on your phone if you answer a call at or before the second ring. This would also apply to an answering device that answers the call at or before the second ring.</li><li>• If you subscribe to DSL internet service, install a DSL filter to the telephone line between the telephone base and the telephone line jack. Contact your DSL service provider for filters and installation instructions.</li></ul>

## Troubleshooting

Problem	Suggestion
The system does not receive caller ID or the system does not display caller ID during call waiting.	<ul style="list-style-type: none"><li>• Make sure you subscribe to caller ID with call waiting features provided by the local telephone company.</li><li>• The caller may not be calling from an area which supports caller ID.</li><li>• Both you and the caller's telephone companies must use equipment which are compatible with caller ID service.</li><li>• Caller ID data may not be displayed on your phone if you answer a call at or before the second ring. This would also apply to an answering device that answers the call at or before the second ring.</li><li>• If you subscribe to DSL internet service, install a DSL filter to the telephone line between the telephone base and the telephone line jack. Contact your DSL service provider for filters and installation instructions.</li></ul>
Caller ID entries do not match the numbers I need to dial.	<ul style="list-style-type: none"><li>• Although the call log entries you receive have 10 digits, (the area code plus the seven-digit number), in some areas, you may need to dial only the seven digits, or a 1 plus the seven digits, or a 1 plus the area code plus the seven digits. You can change the number of digits that you dial from the call log.</li><li>• While reviewing the call log, press # repeatedly to display these dialing options for local and long distance numbers before dialing or saving the telephone number.</li></ul>

## Troubleshooting

Problem	Suggestion
<p><b>CONNECTING...</b> is shown in the handset display window. Why don't I get a dial tone when I try to use this telephone?</p>	<ul style="list-style-type: none"><li>• The handset may be out of range. Move it closer to the telephone base.</li><li>• Make sure the power cord is securely plugged into the telephone base. Use a working electrical outlet that is not controlled by a wall switch.</li><li>• Reset your telephone by unplugging the power adapter from the telephone base. Disconnect the battery from the cordless handset. Wait for 15 seconds, then plug in the power adapter and re-install the battery. Place the handset in the telephone base and allow up to one minute for the handset and telephone base to synchronize.</li><li>• Other electronic products may prevent your handset and telephone base from communicating with each other. Try installing your telephone base as far away from these electronic devices as possible: wireless routers, radios, radio towers, pager towers, cellular telephones, intercoms, room monitors, televisions, personal computers, kitchen appliances and other cordless telephones.</li></ul>

## Troubleshooting

Problem	Suggestion
Common cure for electronic equipment.	<ul style="list-style-type: none"><li>• If the telephone is not responding normally, try putting the cordless handset in the telephone base. If it does not respond, try the following (in the order listed):</li><li>• Disconnect the power to the telephone base.</li><li>• Disconnect the battery on the cordless handset.</li><li>• Wait a few minutes before connecting power to the telephone base.</li><li>• Re-install the battery and place the cordless handset in the telephone base.</li><li>• Wait for the cordless handset to synchronize its connection with the telephone base. Allow up to one minute for this to take place.</li></ul>

## Operating range

This cordless telephone operates with the maximum power allowed by the Federal Communications Commission (FCC). Even so, this handset and telephone base can communicate over only a certain distance - which can vary with the locations of the telephone base and handset, the weather, and the layout of your home or office.

When the handset is out of range, the handset will display **CONNECTING...**

If there is a call while the handset is out of range, it might not ring; or if it does ring, the call might not connect well when you press **TALK/FLASH**.

Move closer to the telephone base, then press **TALK/FLASH** to answer the call.

If the handset moves out of range during a telephone conversation, there might be interference.

To improve reception, move closer to the telephone base.

## Maintenance

### Taking care of your telephone

Your cordless telephone contains sophisticated electronic parts, so it must be treated with care.

### Avoid rough treatment

Place the handset down gently. Save the original packing materials to protect your telephone if you ever need to ship it.

### Avoid water

Your telephone can be damaged if it gets wet. Do not use the handset outdoors in the rain, or handle it with wet hands. Do not install the telephone base near a sink, bathtub or shower.

### Electrical storms

Electrical storms can sometimes cause power surges harmful to electronic equipment. For your own safety, take caution when using electrical appliances during storms.

### Cleaning your telephone

Your telephone has a durable plastic casing that should retain its luster for many years. Clean it only with a soft cloth slightly dampened with water or a mild soap. Do not use excess water or cleaning solvents of any kind.

Remember that electrical appliances can cause serious injury if used when you are wet or standing in the water. If the telephone base should fall into the water, **DO NOT RETRIEVE IT UNTIL YOU UNPLUG THE POWER CORD AND TELEPHONE LINE CORDS FROM THE WALL.** Then pull the unit out by the unplugged cords.



## About cordless telephones

- **Privacy:** The same features that make a cordless telephone convenient create some limitations. Telephone calls are transmitted between the telephone base and the cordless handset by radio waves, so there is a possibility that the cordless telephone conversations could be intercepted by radio receiving equipment within range of the cordless handset. For this reason, you should not think of cordless telephone conversations as being as private as those on corded telephones.
- **Electrical power:** The telephone base of this cordless telephone must be connected to a working electrical outlet. The electrical outlet should not be controlled by a wall switch. Calls cannot be made from the cordless handset if the telephone base is unplugged or switched off, or if the electrical power is interrupted.
- **Potential TV interference:** Some cordless telephones operate at frequencies that may cause interference to televisions and VCRs. To minimize or prevent such interference, do not place the telephone base of the cordless telephone near or on top of a TV or VCR. If interference is experienced, moving the cordless telephone farther away from the TV or VCR will often reduce or eliminate the interference.
- **Rechargeable batteries:** This product contains either nickel-cadmium or nickel-metal-hydride rechargeable batteries. Exercise care in handling batteries in order not to create a short circuit with conducting material such as rings, bracelets, and keys. The battery or conductor may overheat and cause harm. Observe proper polarity between the battery and the battery charger.
- **Nickel-metal-hydride rechargeable batteries:** Dispose of these batteries in a safe manner. Do not burn or puncture the battery. Like other batteries of this type, if burned or punctured, they could release caustic material which could cause injury.

## The RBRC® seal



The RBRC® seal on the nickel-metal-hydride battery indicates that VTech Communications, Inc. is voluntarily participating in an industry program to collect and recycle these batteries at the end of their useful lives, when taken out of service within the United States and Canada.

The RBRC® program provides a convenient alternative to placing used nickel-metal-hydride batteries into the trash or municipal waste, which may be illegal in your area.

VTech's participation in RBRC® makes it easy for you to drop off the spent battery at local retailers participating in the RBRC® program or at authorized VTech product service centers. Please call **1-800-8-BATTERY™** for information on Ni-MH battery recycling and disposal bans/restrictions in your area. VTech's involvement in this program is part of its commitment to protecting our environment and conserving natural resources.

**RBRC® is a registered trademark of Rechargeable Battery Recycling Corporation.**

# Warranty

## **What does this limited warranty cover?**

The manufacturer of this VTech Product warrants to the holder of a valid proof of purchase (“Consumer” or “you”) that the Product and all accessories provided in the sales package (“Product”) are free from defects in material and workmanship, pursuant to the following terms and conditions, when installed and used normally and in accordance with the Product operating instructions. This limited warranty extends only to the Consumer for Products purchased and used in the United States of America and Canada.

## **What will VTech do if the Product is not free from defects in materials and workmanship during the limited warranty period (“Materially Defective Product”)?**

During the limited warranty period, VTech’s authorized service representative will repair or replace at VTech’s option, without charge, a Materially Defective Product. If we repair the Product, we may use new or refurbished replacement parts. If we choose to replace the Product, we may replace it with a new or refurbished Product of the same or similar design. We will retain defective parts, modules, or equipment. Repair or replacement of the Product, at VTech’s option, is your exclusive remedy. VTech will return the repaired or replacement Products to you in working condition. You should expect the repair or replacement to take approximately 30 days.

## **How long is the limited warranty period?**

The limited warranty period for the Product extends for ONE (1) YEAR from the date of purchase. If VTech repairs or replaces a Materially Defective Product under the terms of this limited warranty, this limited warranty also applies to repaired or replacement Product for a period of either (a) 90 days from the date the repaired or replacement Product is shipped to you or (b) the time remaining on the original one-year warranty; whichever is longer.

## **What is not covered by this limited warranty?**

This limited warranty does not cover:

1. Product that has been subjected to misuse, accident, shipping or other physical damage, improper installation, abnormal operation or handling, neglect, inundation, fire, water or other liquid intrusion; or
2. Product that has been damaged due to repair, alteration or modification by anyone other than an authorized service representative of VTech; or
3. Product to the extent that the problem experienced is caused by signal conditions, network reliability, or cable or antenna systems; or
4. Product to the extent that the problem is caused by use with non-VTech accessories; or
5. Product whose warranty/quality stickers, product serial number plates or electronic serial numbers have been removed, altered or rendered illegible; or
6. Product purchased, used, serviced, or shipped for repair from outside the United States of America or Canada, or used for commercial or institutional purposes (including but not limited to Products used for rental purposes); or
7. Product returned without a valid proof of purchase (see item 2 below); or

## Warranty

8. Charges for installation or set up, adjustment of customer controls, and installation or repair of systems outside the unit.

### How do you get warranty service?

To obtain warranty service in Canada, please call 1 (800) 267-7377. In the US, please call 1 (800) 595-9511. NOTE: Before calling for service, please review the user's manual - a check of the Product's controls and features may save you a service call.

Except as provided by applicable law, you assume the risk of loss or damage during transit and transportation and are responsible for delivery or handling charges incurred in the transport of the Product(s) to the service location. VTech will return repaired or replaced Product under this limited warranty. Transportation, delivery or handling charges are prepaid. VTech assumes no risk for damage or loss of the Product in transit. If the Product failure is not covered by this limited warranty, or proof of purchase does not meet the terms of this limited warranty, VTech will notify you and will request that you authorize the cost of repair prior to any further repair activity. You must pay for the cost of repair and return shipping costs for the repair of Products that are not covered by this limited warranty.

### What must you return with the Product to get warranty service?

1. Return the entire original package and contents including the Product to the VTech service location along with a description of the malfunction or difficulty; and
2. Include a "valid proof of purchase" (sales receipt) identifying the Product purchased (Product model) and the date of purchase or receipt; and
3. Provide your name, complete and correct mailing address, and telephone number.

### Other Limitations

This warranty is the complete and exclusive agreement between you and VTech. It supersedes all other written or oral communications related to this Product. VTech provides no other warranties for this Product. The warranty exclusively describes all of VTech's responsibilities regarding the Product. There are no other express warranties. No one is authorized to make modifications to this limited warranty and you should not rely on any such modification.

State/Provincial Law Rights: This warranty gives you specific legal rights, and you may also have other rights, which vary from state to state or province to province.

Limitations: Implied warranties, including those of fitness for a particular purpose and merchantability (an unwritten warranty that the Product is fit for ordinary use) are limited to one year from the date of purchase. Some states/provinces do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. In no event shall VTech be liable for any indirect, special, incidental, consequential, or similar damages (including, but not limited to lost profits or revenue, inability to use the Product or other associated equipment, the cost of substitute equipment, and claims by third parties) resulting from the use of this Product. Some states/provinces do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

**Please retain your original sales receipt as proof of purchase.**

# FCC, ACTA and IC regulations

## FCC Part 15

This equipment has been tested and found to comply with the requirements for a Class B digital device under Part 15 of the Federal Communications Commission (FCC) rules. These requirements are intended to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to this equipment not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Privacy of communications may not be ensured when using this telephone.

To ensure safety of users, the FCC has established criteria for the amount of radio frequency energy that can be safely absorbed by a user or bystander according to the intended usage of the product. This product has been tested and found to comply with the FCC criteria. The handset may be safely held against the ear of the user. The telephone base shall be installed and used such that parts of the user's body other than the hands are maintained at a distance of approximately 20 cm (8 inches) or more. If you choose to use a clipping device, please make sure to only use the supplied VTech belt clip.

This Class B digital apparatus complies with Canadian ICES-003.

## FCC Part 68 and ACTA

This equipment complies with Part 68 of the FCC rules and with technical requirements adopted by the Administrative Council for Terminal Attachments (ACTA). The label on the back or bottom of this equipment contains, among other things, a product identifier in the format US: AAAEQ##TXXXX. This identifier must be provided to your local telephone company upon request.

The plug and jack used to connect this equipment to premises wiring and the telephone network must comply with applicable Part 68 rules and technical requirements adopted by ACTA. A compliant telephone cord and modular plug is provided with this product. It is designed to be connected to a compatible modular jack that is also compliant. An RJ11 jack should normally be used for connecting to a single line and an

## FCC, ACTA and IC regulations

RJ14 jack for two lines. See Installation Instructions in the user's manual.

The Ringer Equivalence Number (REN) is used to determine how many devices you may connect to your telephone line and still have them ring when you are called. The REN for this product is encoded as the 6th and 7th characters following the US: in the product identifier (e.g., if ## is 03, the REN is 0.3). In most, but not all areas, the sum of all RENs should be five (5.0) or less. For more information, please contact your local telephone company.

This equipment may not be used with Party Lines. If you have specially wired alarm dialing equipment connected to your telephone line, ensure the connection of this equipment does not disable your alarm equipment. If you have questions about what will disable alarm equipment, consult your telephone company or a qualified installer.

If this equipment is malfunctioning, it must be unplugged from the modular jack until the problem has been corrected. Repairs to this telephone equipment can only be made by the manufacturer or its authorized agents. For repair procedures, follow the instructions outlined under the Limited Warranty.

If this equipment is causing harm to the telephone network, the telephone company may temporarily discontinue your telephone service. The telephone company is required to notify you before interrupting service. If advance notice is not practical, you will be notified as soon as possible. You will be given the opportunity to correct the problem and the telephone company is required to inform you of your right to file a complaint with the FCC. Your telephone company may make changes in its facilities, equipment, operation, or procedures that could affect the proper functioning of this product. The telephone company is required to notify you if such changes are planned.

If this product is equipped with a corded or cordless handset, it is hearing aid compatible.

If this product has memory dialing locations, you may choose to store emergency telephone numbers (e.g., police, fire, medical) in these locations. If you do store or test emergency numbers, please:

Remain on the line and briefly explain the reason for the call before hanging up.

Perform such activities in off-peak hours, such as early morning or late evening.

### Industry Canada

Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference, including interference that may cause undesired operation.

The term "IC: " before the certification/registration number only signifies that the Industry Canada technical specifications were met.

The Ringer Equivalence Number (REN) for this terminal equipment is 0.1. The REN is an indication of the maximum number of devices allowed to be connected to a telephone interface. The termination on an interface may consist of any combination of devices subject only to the requirement that the sum of the RENs of all the devices does not exceed five.

This product meets the applicable Industry Canada technical specifications.

## Technical specifications

Frequency control	Crystal controlled PLL synthesizer
Transmit frequency	Handset: 1921.536-1928.448 MHz Telephone base: 1921.536-1928.448 MHz
Channels	5
Nominal effective range	Maximum power allowed by FCC and IC. Actual operating range may vary according to environmental conditions at the time of use.
Size	Handset: 1.89in X 6.71in X 0.96in (48.0mm X 170.5mm X 24.3mm) Telephone base: 4.14in X 4.45in X 4.90in (105.2mm X 113.0mm X 124.4mm)
Weight	Handset: 4.67oz (132.3g) (including battery) Telephone base: 4.93oz (139.7g)
Power requirements	Handset: 2.4V DC 500mAh Ni-MH battery Telephone base: 6V DC @ 400mA
Memory	Handset directory: 50 memory locations; up to 30 digits and 15 characters Handset call log: 50 memory locations; up to 24 digits and 15 characters

# Index

## A

Answer a call 12

## B

Battery 3, 33

## C

Call log 22

Call log display screen messages 27

Call waiting 13

Caller ID 21

Chain dialing 14

Character chart 17

Charging 3

Clear voice mail 11

## D

Delete from redial 28

Delete from the directory 20

Delete from the call log 26

Dial a call log entry 24

Dial a directory entry 18

Dial a redial entry 28

Directory 15

DSL filter 2

## E

Edit a directory entry 19

End a call 12

## F

FCC, ACTA and IC regulations 48

Find handset 13

## H

Handset indicators 31

Handset display screen messages 29

## I

Install an image 5

## K

Key tone 10

## L

Language 10

## M

Maintenance 44

Make a call 12

Make a call log entry ready to dial 24

Mute 12

## O

Operating range 44

## P

Parts checklist 1

## R

RBRC® seal 45

Redial list 28

Review the call log 23

Ringer mute 13

Ringer tone 9

Ringer volume 8

## S

Save an entry to the directory 25

Search the directory 18

Store a directory entry 16

## T

Technical specifications 50

Telephone base indicators 31

Telephone base installation 2

Troubleshooting 35

## V

Voicemail 11

Volume 8, 13

## W

Warranty 46

VTECH TELECOMMUNICATIONS LTD.  
A member of THE VTECH GROUP OF COMPANIES.  
Distributed in the U.S.A. by VTech Communications, Inc. Beaverton, Oregon  
Distributed in Canada by VTech Technologies Canada, Ltd., Richmond, B.C.  
Copyright ©2008 for VTECH TELECOMMUNICATIONS LTD.  
Printed in China.

91-001792-010-100