

# P/2 DA2xi


## P/2 DA2xi MT

TWO OUTPUT VGA-QXGA  
DISTRIBUTION AMPLIFIERS

- 350 MHz (-3 dB) RGB bandwidth, fully loaded
- Gain and peaking switch
- Selectable sync impedance
- Power and source signal indicator
- Includes detachable 6' (2 m) male-to-male VGA input cable
- DDC signal pass-through
- Active PC Audio interfacing – P/2 DA2xi MT only



P/2 DA2xi

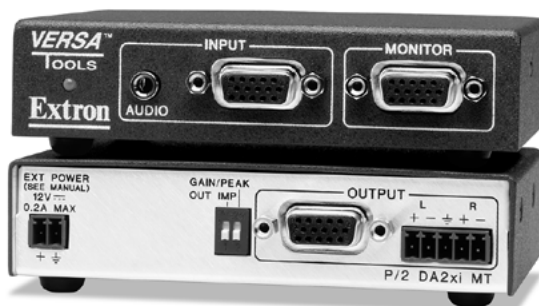

P/2 DA2xi MT

The Extron P/2 DA2xi and P/2 DA2xi MT are one input, two output, high performance distribution amplifiers. They are available in compact and durable metal enclosures which can be easily installed in small, tight places. They are even portable enough to fit into a briefcase for presenters on-the-go.



**Extron® Electronics**  
www.extron.com

## DESCRIPTION

The Extron P/2 DA2xi and P/2 DA2xi MT are one input, two output, high resolution VGA-QXGA distribution amplifiers. Available in compact and durable metal enclosures, these units can be easily installed in small, tight places. They are even portable enough to fit into a briefcase for presenters on-the-go. They offer 350 MHz (-3 dB) RGB video bandwidth and are compatible with VGA-QXGA graphic cards, monitors, and projectors. Gain, peaking, and sync impedance are DIP switch selectable.

Housed in quarter rack width enclosures, the flexible P/2 DA2xi and P/2 DA2xi MT can be combined with a variety of mounting options to meet the requirements of virtually any application or environment. Utilizing an optional VersaTools® or Universal Rack Shelf Kit, the P/2 DA2xi and P/2 DA2xi MT can be rack-mounted alone or with three other quarter rack width A/V products. Additional mounting kits are available so these systems can be mounted under a desk or next to a projector.

## FEATURES

- **Bandwidth** – 350 MHz (-3 dB) RGB bandwidth, fully loaded.
- **Gain and peaking switch** – Provides various levels of signal boost to maintain video signal integrity over long cable runs.
- **Selectable sync impedance** – Sync impedance can be set via DIP-switch for optimum compatibility with various laptop computers.
- **Power and source signal indicator** – A dual color LED illuminates yellow to indicate power, and green to indicate that a signal is present at the input.
- **DDC signal pass-through** – DDC information is routed from the input to the local monitor output. DDC pass-through ensures that the display connected to the local monitor output is able to communicate with the computer graphics card, providing information about its maximum resolution capability and optimal resolution.
- **Rack-mountable or portable**
- **External international power supply** – An autoswitchable power supply is included.
- **Extron input cable(s) included** – The P/2 DA2xi comes with one detachable, high performance, Extron six foot male to male VGA cable, while the P/2 DA2xi MT comes with one detachable six foot male to male VGA with audio cable.




Includes Extron VGA with Audio Cable


## MOUNTING OPTIONS

Because the P/2 DA2xi and P/2 DA2xi MT are housed in quarter rack width metal enclosures, there are a number of versatile mounting options available to suit virtually any application or environment. With an optional VersaTools or Universal Rack Shelf Kit, either model can be rack-mounted alone or with three other quarter rack width A/V products. There are also optional mounting kits available so the P/2 DA2xi and P/2 DA2xi MT can be mounted under a desk or next to a projector (see mounting options diagrams below).


### Rack Mount

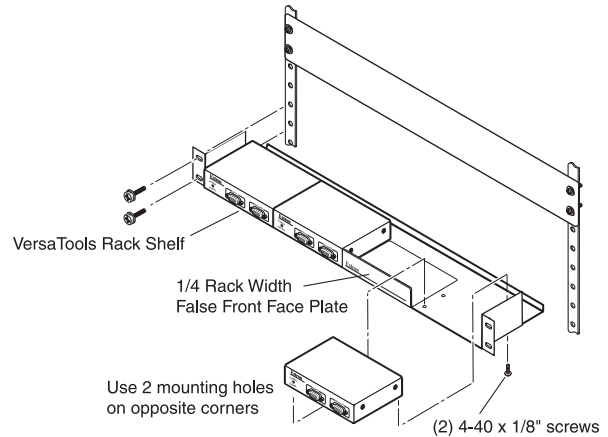

### Under Desk Mount

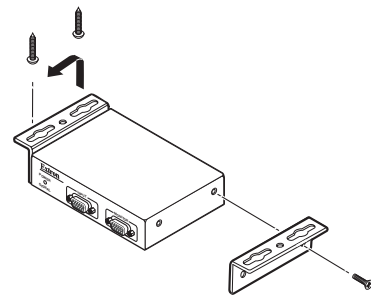

### Projector Mount

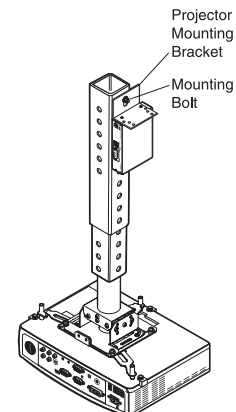

<b>VIDEO</b>	
Gain	
P/2 DA2xi .....	Output: 0 dB or 0.4 dB, selectable Local monitor output: unity
P/2 DA2xi MT .....	Output: 0 dB or 0.6 dB, selectable Local monitor output: unity
Peaking	
P/2 DA2xi .....	Output: selectable, 0.7 dB or 1.4 dB at 100 MHz
Local monitor output: fixed	
P/2 DA2xi MT .....	Output: selectable, 0 dB or 0.6 dB at 100 MHz Local monitor output: fixed
Bandwidth .....	350 MHz (-3 dB)

<b>VIDEO INPUT</b>	
Number/signal type .....	1 VGA-QXGA RGBHV, RGBS, RGsB, RsGsBs
Connectors .....	(1) 15-pin HD female
Nominal level.....	0.7 Vp-p for RGB
Minimum/maximum levels.....	Analog, 0.3 V to 1.5 Vp-p with no offset at unity gain
Impedance .....	75 ohms
Horizontal frequency.....	15 kHz to 135 kHz
Vertical frequency.....	30 Hz to 170 Hz
Return loss .....	<-38 dB @ 5 MHz
DC offset (max. allowable).....	1.0 V
Input coupling .....	DC

<b>VIDEO OUTPUT</b>	
Number/signal type .....	1 VGA-QXGA RGBHV, RGBS, RGsB, RsGsBs 1 VGA-QXGA RGBHV, RGBS, RGsB, RsGsBs local monitor loop-through (i.d. bits are passed through)
Connectors .....	(2) 15-pin HD female
Nominal level.....	0.7 Vp-p for RGB at unity gain
Minimum/maximum levels.....	Analog, 0.3 V to 1.5 Vp-p (follows input)
Impedance .....	75 ohms
Return loss .....	<-40 dB @ 5 MHz
DC offset .....	±5 mV with input at 0 offset

<b>SYNC</b>	
Input type .....	RGBHV, RGBS, RGsB, RsGsBs
Output type.....	RGBHV, RGBS, RGsB, RsGsBs
Input level .....	1.5 V to 5.0 Vp-p
Output level .....	TTL, 5 Vp-p, unterminated
Input impedance	
P/2 DA2xi .....	<1k ohm (default) or 10k ohms, selectable
P/2 DA2xi MT .....	510 ohms (fixed)
Output impedance .....	75 ohms (default) or 50 ohms, selectable
Max. propagation delay .....	60 ns
Max. rise/fall time .....	4 ns
Polarity.....	Positive or negative (follows input)

<b>AUDIO — P/2 DA2XI MT</b>	
Gain .....	Unbalanced output: 0 dB; balanced output: +6 dB
Frequency response .....	20 Hz to 20 kHz, +0.05 dB, -0.1 dB
THD + Noise .....	0.03% @ 1 kHz at nominal level
S/N .....	>90 dB (balanced) at maximum output
Crosstalk .....	<-80 dB @ 1 kHz, fully loaded
Stereo channel separation .....	>80 dB @ 1 kHz, >60 dB @ 20 kHz
CMRR .....	>67 dB @ 20 Hz to 20 kHz

<b>AUDIO INPUT — P/2 DA2XI MT</b>	
Number/signal type .....	1 stereo, unbalanced
Connectors .....	(1) 3.5 mm stereo jack, female; tip (L), ring (R), sleeve (GND)
Impedance .....	>18k ohms unbalanced, DC coupled
Nominal level.....	-10 dBV (316 mV)
Maximum level .....	>+10 dBV (3.16 V) (unbalanced) at 1%THD+N

**NOTE:** 0 dBu = 0.775 Vrms, 0 dBV = 1 Vrms, 0 dBV ≈ 2 dBu

<b>AUDIO OUTPUT — P/2 DA2XI MT</b>	
Number/signal type .....	1 stereo, balanced/unbalanced
Connectors .....	(1) 3.5 mm captive screw connector, 5 pole
Impedance .....	50 ohms unbalanced, 100 ohms balanced
Gain error .....	±0.1 dB channel to channel
Nominal level.....	-2 dBu (632 mV) balanced output -10 dBV (316 mV) unbalanced output
Maximum level (Hi-Z) .....	>+15 dBu (4.36 V), balanced at 1% THD+N
Maximum level (600 ohms) .....	>+9 dBm (2.18 V), balanced at 1% THD+N

<b>GENERAL</b>	
External power supply .....	100 VAC to 240 VAC, 50/60 Hz, 4.5 watts, external, autoswitchable; to 12 VDC, 1 A
Power input requirements .....	12 VDC, 0.2 A
Temperature/humidity .....	Storage: -40 to +158 °F (-40 to +70 °C) / 10% to 90%, noncondensing Operating: +32 to +122 °F (0 to +50 °C) / 10% to 90%, noncondensing
Rack mount.....	Yes, with optional 1U rack shelf
Enclosure type .....	Metal
Enclosure dimensions .....	1.0" H x 4.3" W x 3.0" D (quarter rack wide) 2.5 cm H x 10.9 cm W x 7.6 cm D (Depth excludes connectors.)
Product weight .....	0.5 lbs (0.3 kg)
Shipping weight .....	3 lbs (2 kg)
Vibration .....	ISTA 1A in carton (International Safe Transit Association)
Listings.....	UL, CUL
Compliances .....	CE, FCC Class A, VCCI, AS/NZS, ICES
MTBF .....	30,000 hours
Warranty .....	3 years parts and labor

**NOTE:** All nominal levels are at ±10%.



Model	Version Description	Part Number
P/2 DA2xi	1x2 VGA-QXGA.....	60-506-03
P2 DA2xi MT	1x2 VGA-QXGA w/ Audio.....	60-506-21

<b>Included Accessories</b>	
User Guide	
Tweaker	
Desktop power supply	
VGA cable clip	
VGA M-M MD/6 - P/2 DA2xi only .....	26-238-01
VGA-A M-M MD/6 - P/2 DA2xi MT only.....	26-490-02
5-pin captive screw mating plug - P/2 DA2xi MT only	


<b>Optional Accessories</b>	
Versa-Tools rack shelf kit .....	60-190-20
Universal rack shelf kit .....	60-190-01
Under-desk mounting kit.....	70-077-01
Projector mounting kit .....	70-077-04
T-VGA adapter .....	26-106-01
VGA-A M-M MD/3 .....	26-490-01
VGA-A M-M MD/12 .....	26-490-03

Specifications are subject to change without notice.


# APPLICATION DIAGRAMS

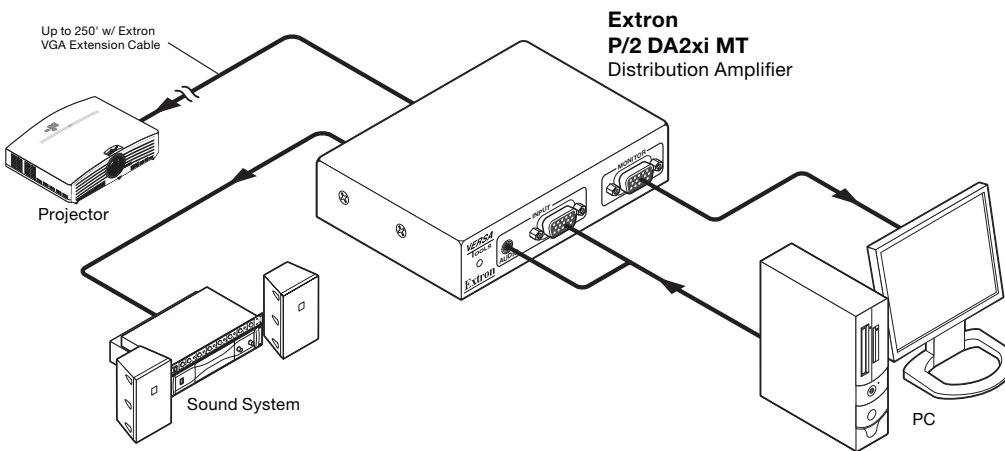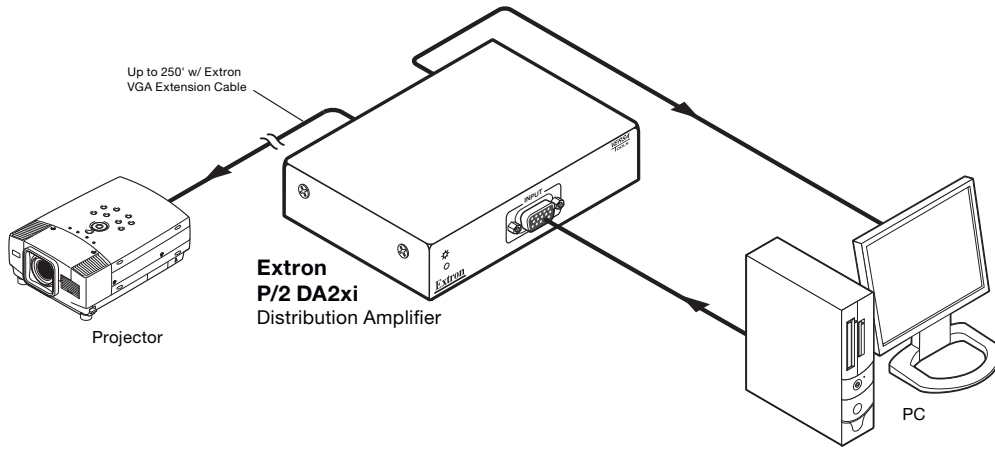


# PANEL DRAWINGS

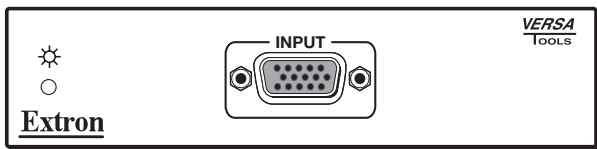


P/2 DA2xi - Front

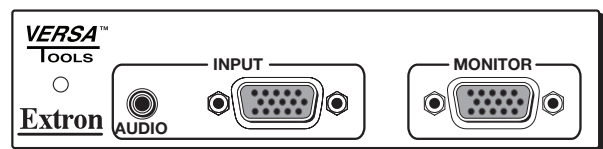

P/2 DA2xi MT - Front

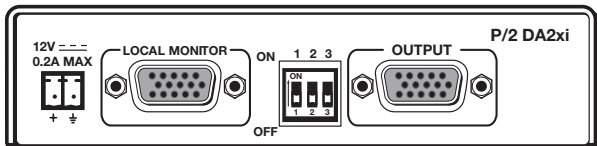

P/2 DA2xi - Back

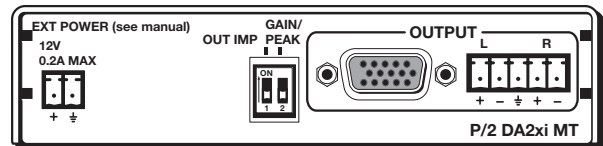

P/2 DA2xi MT - Back



**Extron Electronics, USA**  
 1230 South Lewis Street  
 Anaheim, CA 92805  
 800.633.9876 714.491.1500  
 FAX 714.491.1517

**Extron Electronics, Europe**  
 Beeldschermweg 6C, 3821 AH Amersfoort  
 The Netherlands  
 +800.3987.6673 +31.33.453.4040  
 FAX +31.33.453.4050

**Extron Electronics, Asia**  
 135 Joo Seng Rd. #04-01  
 PM Industrial Bldg.  
 Singapore 368363  
 +65.6383.4400 FAX +65.6383.4664

**Extron Electronics, Japan**  
 Kyodo Building, 16 Ichibancho  
 Chiyoda-ku, Tokyo 102-0082  
 Japan  
 +81.3.3511.7655 FAX +81.3.3511.7656