

3G Mobile Hotspot RF-MFH2



Label Here

QUICK SETUP GUIDE

Congratulations on your purchase of the 3G Mobile Hotspot (MiFi® RF-MFH2). This hotspot represents the state of the art in Wi-Fi hotspot design and is designed for reliable and trouble-free performance.


Features

- Personal mobile hotspot
- 3G Internet On-the-Go
- Compatible with Wi-Fi enabled devices (PCs, smartphones, MP3 players, eReaders, etc.)
- Connects up to five Wi-Fi devices simultaneously

Package contents

- 3G Mobile Hotspot
- Rechargeable lithium-ion battery
- A/C charger
- User Guide
- Quick Setup Guide

Components

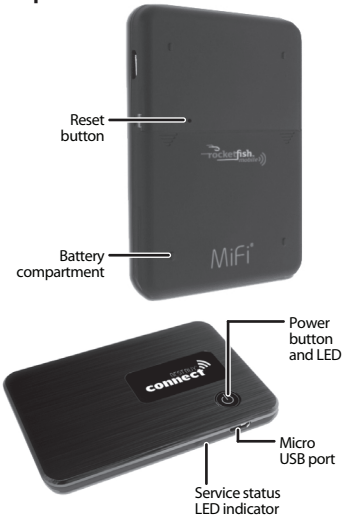

System requirements

- For Wi-Fi connection, a device supporting Wi-Fi 802.11 b/g
- Windows® 7, Windows Vista®, Windows® XP, or Mac OS® X 10.4, 10.5, 10.6
- 40 MB hard drive space
- 128 MB of memory (RAM)

Removing the tab and charging the battery

Note: The battery should be fully charged for four hours before using the MiFi device for the first time.

- 1 Turn your mobile hotspot over so the bottom is facing up.
- 2 Pull the plastic tab under the battery compartment cover out in the direction of the arrow.



- 3 Connect the microUSB end of the AC wall charger to the microUSB port on your hotspot.
- 4 Plug the other end of the AC wall charger into a power outlet. Charge for at least two and a half hours (four hours recommended). The LED will be green when fully charged.

Caution: Use only an approved charging accessory to charge your mobile hotspot. Use of an incompatible charger may cause damage to your hotspot and void the warranty.



Connecting your hotspot using Wi-Fi

Note: Disconnect the Mobile Hotspot from the power supply before starting activation.

- 1 Press the power button on your hotspot. The power button LED lights.
- 2 Use your Wi-Fi manager on your device to connect it to your hotspot. The settings in your Wi-Fi manager must match your hotspot settings.
- 3 The default network name (SSID) and password for your hotspot are on the label on the back of the hotspot. The SSID and password also appear on this *Quick Setup Guide*.

- 4 Launch your web browser and enter <http://bestbuyconnect.mifi> or <http://192.168.1.1> into the address bar, and press **Enter** or **Return**.
- 5 Follow the directions on the screen. To customize your settings, see your *User Guide*.

Troubleshooting

For information on troubleshooting, refer to the *User Guide*. For more detailed information refer to the *Comprehensive User Guide* posted on www.rocketfishproducts.com and also accessible on your hotspot under Device Settings. Connect to MiFi Device Settings. Go to <http://bestbuyconnect.mifi> (or <http://192.168.1.1>), then click the link to download the *Comprehensive User Guide*.

Specifications

For information on specifications, refer to the *User Guide*.

FCC Part 15

This device complies with Part 15 of the FCC Rules.

One-year limited warranty

Visit www.rocketfishproducts.com for details.

Contact Rocketfish:

For customer service call 1-800-620-2790
www.rocketfishproducts.com

Distributed by Best Buy Purchasing, LLC
7601 Penn Avenue South, Richfield, MN 55423-3645 USA
© 2011 BBY Solutions, Inc., All Rights Reserved. ROCKETFISH is a trademark of BBY Solutions, Inc. All other products and brand names are trademarks of their respective owners.

MiFi® and the MiFi logo are registered trademarks of Novatel Wireless, Inc. Best Buy Connect™ is a registered service mark of Best Buy Connect, LLC Minneapolis, MN

© 2011 Best Buy Connect, LLC All rights reserved
Best Buy Connect Customer Care
(866) 652-4141
BestBuyConnect@response.bestbuy.com
<http://www.BestBuyConnect.com>