


Submitted Model No.:___

Specific Features:

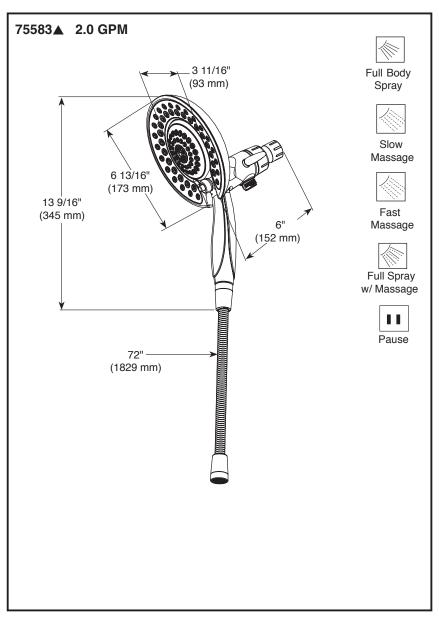

IN2ITION[®]

- 2-In-1 Shower
- 5-Spray Setting Hand Shower
- Touch-Clean[®] Nozzles

STANDARD SPECIFICATIONS:

- Maximum flow rate 2.0 gpm @ 80 PSI, 7.6L/min @ 552kPa.
- Integrated handshower docks securely into showerhead when not in use.
- Multiple handshower spray setings.
- 3-Way diverter allows use of handshower only. showerhead only or both on at one time.
- Fixed showerhead with 8" extra-wide spray.
- Matching plated face and push-button pause control, lever to change sprays, easy single-handed operation.
- 72"(1829mm) Ribbon hose.
- Hand held shower with five spray settings not a positive shut-off.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or,for commercial users, for 5 years from the dateof purchase.
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense[®]



Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

FAUCET COMPANY