

THE LIGHT AHEAD



ELINCHROM FLASH SYSTEM

Please read carefully the notes about this catalogue!

This catalogue may show images of products with accessories, which are not part of Sets or single units.

Elinchrom Set and single unit configurations may change without advise and they might be different in other countries.

Please find actual configurations at www.elinchrom.com

For further details, upgrades, news, the latest information about the Elinchrom System, please visit frequently the Elinchrom website. In the Support area, the latest user guides and technical specifications can be downloaded.

Technical data, features and functions of Elinchrom flash units and the EL-Skyport system may change without advise.

Tolerances of specifications and components conform to IEC and CE standards. The listed values can differ due to tolerances in components, or measuring instruments. Technical data, subject to change. No guarantee for misprints.

Follow us

Facebook / ElinchromLTD / www.facebook.com/ElinchromLTD

Twitter / @ElinchromLTD / www.twitter.com/ElinchromLTD

Instagram / [elinchrom_ltd](http://www.instagram.com/elinchrom_ltd) / www.instagram.com/elinchrom_ltd

Pinterest / [elinchrom](http://www.pinterest.com/elinchrom) / www.pinterest.com/elinchrom

Copyright

Cover, editorial, p.3 © *Phillippe Echaroux*

p.12, p.16, p.25, p.34 © *Frank Doorhof*

p.36 © *Fredrik Schenholm*

p.54 © *Chris Garrison*



EDITORIAL



At the beginning of 2014 our latest unit, the ELC Pro HD compact set yet another milestone in the Elinchrom and Studio Flash history with its extraordinary specification and unique user interface.

We started this project with our revered CEO Malcolm Whittle but unfortunately at the end of 2013 we were shocked by his sudden death.

Not only was Malcolm a great CEO but he was also a visionary and a true friend to all of us.

The legend continues ...

Your EL Team

CONTENTS



| | | |
|-----------------|----------------------------|----|
| COMPACTS | Starters – D-Lite RX ONE | 4 |
| | Advanced – D-Lite RX 2 & 4 | 6 |
| | Entry Professional – BRX | 8 |
| | Professional – ELC Pro HD | 10 |

| | | |
|--------------------|-------------------------|----|
| POWER PACKS | Digital RX | 13 |
| | Digital RX – Flashheads | 14 |

| | | |
|-----------------------------|-----------------------------|----|
| BATTERY FLASH SYSTEM | Quadra Hybrid | 17 |
| | Quadra Hybrid – Accessories | 18 |
| | Ranger RX | 21 |
| | Ranger RX – Accessories | 22 |

| | | |
|-------------------------|----------|----|
| CONTINUOUS LIGHT | Scanlite | 35 |
|-------------------------|----------|----|

| | | |
|--------------------|------------------------|----|
| ACCESSORIES | EL – Skyport | 26 |
| | Rotalux Softbox | 38 |
| | Special Effect Lights | 41 |
| | Indirect Softlites | 42 |
| | Reflector & Grids | 44 |
| | Softlites Reflectors | 46 |
| | Deflectors & Filter | 47 |
| | Umbrellas | 48 |
| | Tripods | 50 |
| | Tripods & Bags | 51 |
| | Cases & Notebook Table | 52 |
| | Sync Cords | 53 |

| | | |
|-----------------------------|--------------------|----|
| POWER SPECIFICATIONS | Last but not least | 56 |
|-----------------------------|--------------------|----|

| | | |
|-----------------|--|----|
| EL-CHART | | 64 |
|-----------------|--|----|



COMPACTS



D-LITE RX ONE

Delivering approximately twice the power of speedlights, the D-Lite RX ONE is a small but robust compact flash from Elinchrom.

The versatility of the Elinchrom system remains in its accessory range: where it is difficult to change the hard nature that characterises speedlights, Elinchrom has some of the best accessories allowing photographers to change the nature of their light, to suit their style.

Used on location, the D-Lite RX ONE is the perfect creative companion to an existing Speedlight system, making use of the built-in intelligent slave cell to offer perfect flash synchronisation. This is the ONE, where it all begins ...



D-Lite RX ONE — 100 Ws N° 20485.1


FEATURES

- Skyport delivers the most comprehensive synchronisation and control, and it's unique to the whole Elinchrom system. Your creative edge in lighting. See page 26.
- 5V sync socket for maximum protection of digital cameras.
- Multi-voltage auto-detection: 90-270 V (excluding modelling lamp).
- Visual Flash Confirmation option. The modelling lamp switches off/on to confirm the flash has been triggered.
- Adjustable proportionality of the modelling lamp range.
- Variable f-stop steps: 1/1, 1/2, 4/10, 1/3, 2/10 or 1/10
- User replaceable plug-in flash tube.

WHY D-LITE RX ONE?

- Programmable ready beep tone.
- Power auto-dump.
- Temperature controlled cooling fan.
- Intelligent pre-flash detector system enables to use speedlights.
- 100 Ws down to 6 Ws power range, perfect for small environments and shallow depth of focus.
- Very short flash durations offer sharper images.
- Exceptional colour balance across the power range.
- Integrates fully into the Elinchrom flash and accessory systems.

CONTROL PANEL

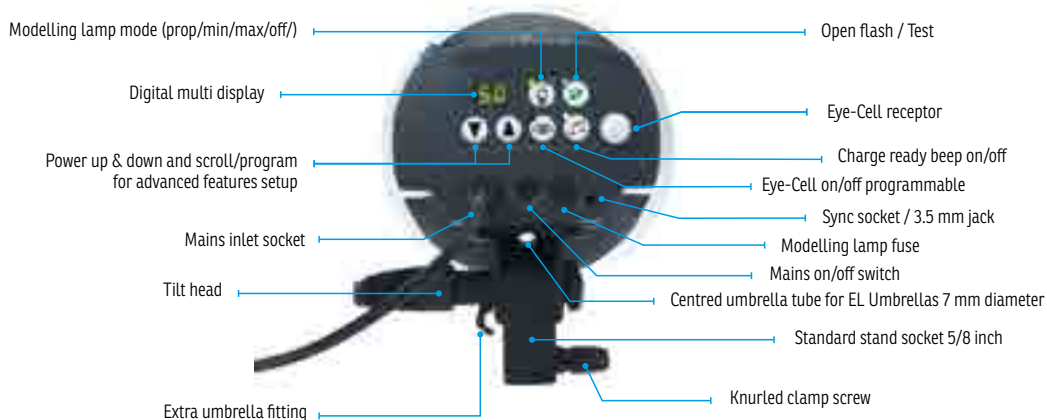

D-LITE RX ONE — SETS

The Softbox Set is ideal for use in small spaces where light control is essential to avoid unwanted reflections, whereas the Umbrella Set is ideal for use in large halls and open spaces where speed of assembly is an advantage. The new 3 Head Set gives photographers extra versatility to be creative with an extra light source.

D-LITE RX ONE SOFTBOX SET

N° 20843.2

| Qty | Code n° | Article |
|-----|---------|--|
| 2x | 20485.1 | D-Lite RX ONE |
| 1x | 19350 | EL-Skyport Transmitter Speed |
| 1x | 11088 | Sync cable 5 m |
| 2x | 26129 | Portalite softbox 66 x 66 cm |
| 1x | 33194 | Carrying bag for D-Lite RX ONE |
| 1x | 30162 | Tripod set 2 (2x 88 – 235 cm with bag) |



D-LITE RX ONE 3 HEAD SET

N° 20845.3

| Qty | Code n° | Article |
|-----|---------|--|
| 3x | 20485.1 | D-Lite RX ONE |
| 1x | 19350 | EL-Skyport Transmitter Speed |
| 1x | 11088 | Sync cable 5m |
| 2x | 26143 | Reflector 16 cm / 90° |
| 1x | 26372 | Pro umbrella white 85 cm |
| 1x | 26351 | Eco umbrella translucent 85 cm |
| 1x | 26129 | Portalite softbox 66 x 66 cm |
| 1x | 33194 | Carrying bag for D-Lite RX ONE |
| 1x | 30161 | Tripod set 3 (3x 88 - 235 cm with bag) |



D-LITE RX ONE UMBRELLA SET

N° 20844.2

| Qty | Code n° | Article |
|-----|---------|--|
| 2x | 20485.1 | D-Lite RX ONE |
| 1x | 19350 | EL-Skyport Transmitter Speed |
| 1x | 11088 | Sync cable 5 m |
| 2x | 26143 | Reflector 16 cm / 90° |
| 1x | 26372 | Umbrella white 85 cm |
| 1x | 26351 | Eco umbrella translucent 85 cm |
| 1x | 33194 | Carrying bag for D-Lite RX ONE |
| 1x | 30162 | Tripod set 2 (2x 88 – 235 cm with bag) |

D-LITE RX

The D-Lite RX 2 and 4 are one step up in the Elinchrom studio flash family, offering a more robust case with ergonomic handle for harder working with larger accessories.

With 200Ws or 400Ws, these units are ideal for small business applications, portraiture and for everyone interested in the most creative lighting.

These Swiss designed and tested units will not only give many years of reliable service and pleasure, but also make it extremely easy to upgrade your lighting as your interest and need grows.

The Skyport remote control built into the Elinchrom units offers cordless triggering and control of power and modelling lamp from the camera, and control of all functions from many other common devices.



D-Lite RX 2 — 200 Ws — N° 20486.1



D-Lite RX 4 — 400 Ws — N° 20487.1

FEATURES

- Skyport delivers the most comprehensive synchronisation and control, and it's unique to the whole Elinchrom system. Your creative edge in lighting. See page 26.
- Intelligent pre-flash detector system enables the full use of D-Lite RX 2/4 with speedlights.
- 5V sync socket for maximum protection of digital cameras.
- Temperature controlled cooling fan.
- Visual Flash Confirmation option. The modelling lamp switches off/on to confirm the flash has been triggered.
- Adjustable proportionality of the modelling lamp range.
- Variable f-stop steps: 1/1, 1/2, 4/10, 1/3, 2/10 or 1/10
- Programmable ready beep tone.
- The accessory bayonet accepts all accessories and Rotalux softboxes up to 135 cm.
- Centred 7 mm umbrella shaft enables also the use of the unique Elinchrom Deflector set.
- Stand bracket with additional umbrella fitting for larger umbrella shafts.
- User replaceable plug-in flash tube.
- Power auto-dump.
- Multi-voltage auto-detection: 90-270 V (excluding modelling lamp).

WHY D-LITE RX 2/4 ?

- 200 and 400 Ws units offer greater versatility.
- Faster recycling for faster work.
- Large rubberised business-like handle for easy use of larger accessories.

CONTROL PANEL



D-LITE RX — SETS

The D-Lite RX sets are very quick to assemble. With only two bags, the complete studio is very portable and is easily stored until its next use. The 2/2 and the 4/4 kits come with two 66 x 66 cm softboxes and when used with the optional Deflector Set, can also offer beauty dish type lighting effects.



D-LITE RX 2/4 TO GO

N° 20840.2

| Qty | Code n° | Article |
|-----|---------|--|
| 1x | 20486.1 | D-Lite RX 2 |
| 1x | 20487.1 | D-Lite RX 4 |
| 1x | 19350 | EL-Skyport Transmitter Speed |
| 1x | 11088 | Sync cable 5 m |
| 2x | 26143 | Reflector 16 cm / 90° |
| 1x | 26350 | Eco umbrella black & silver 85 cm |
| 1x | 26351 | Eco umbrella translucent 85 cm |
| 1x | 33198 | Carrying bag for two D-Lite RX |
| 1x | 30162 | Tripod set 2 (2x 88 – 235 cm with bag) |

D-LITE RX 2 TO GO

N° 20841.2

| Qty | Code n° | Article |
|-----|---------|--|
| 2x | 20486.1 | D-Lite RX 2 |
| 1x | 19350 | EL-Skyport Transmitter Speed |
| 1x | 11088 | Sync cable 5 m |
| 2x | 26129 | Portalite softbox 66 x 66 cm |
| 1x | 26143 | Reflector 16 cm / 90° |
| 1x | 33198 | Carrying bag for two D-Lite RX |
| 1x | 30162 | Tripod set 2 (2x 88 – 235 cm with bag) |



D-LITE RX 4 TO GO

N° 20842.2

| Qty | Code n° | Article |
|-----|---------|--|
| 2x | 20487.1 | D-Lite RX 4 |
| 1x | 19350 | EL-Skyport Transmitter Speed |
| 1x | 11088 | Sync cable 5 m |
| 2x | 26129 | Portalite softbox 66 x 66 cm |
| 1x | 26143 | Reflector 16 cm / 90° |
| 1x | 33198 | Carrying bag for two D-Lite RX |
| 1x | 30162 | Tripod set 2 (2x 88 – 235 cm with bag) |

BRX

The BRX compact flash units are a further evolution of the features and quality that are Elinchrom.

The concept is simple: control, power, speed and versatility. With many programmable features and the EL-Skyport remote system, the BRX enables photographers the greatest freedom to express their individuality. The BRX series delivers the quality of performance needed for a modern workflow.

The flash duration and the fast recycling times they provide is great to have when shooting moving subjects. Available in either 250Ws or 500Ws, they are perfect for portraiture, product and architectural photography.



BRX 250 — 250Ws — N° 20440.1



BRX 500 — 500Ws — N° 20441.1

FEATURES

- Skyport delivers the most comprehensive synchronisation and control, and it's unique to the whole Elinchrom system. Your creative edge in lighting. See page 26.
- Intelligent pre-flash detector system enables the full use of BRX 250 / 500 with speedlights.
- 5V sync socket for maximum protection of digital cameras.
- Temperature controlled cooling fan.
- Visual Flash Confirmation option. The modelling lamp switches off/on to confirm the flash has been triggered.
- Adjustable proportionality of the modelling lamp range.
- Variable f-stop steps: 1/1, 1/2, 4/10, 1/3, 2/10 or 1/10 steps are available.
- Programmable ready beep tone.
- The accessory bayonet accepts the complete range of light modifiers.

WHY BRX 250/500?

- Centred 7 mm umbrella shaft enables also the use of the unique Elinchrom Deflector set.
- Stand bracket with additional umbrella fitting for larger umbrella shafts.
- User replaceable plug-in flash tube.
- Power auto-dump.
- Multi-voltage auto-detection: 90-270 V (excluding modelling lamp).
- Super short flash durations with our A (Action) flashtube.
- Rigid chassis enables the largest accessories to be used.
- High capacity intelligent fan cooling offers higher work capacity.
- Independent modelling lamp control.

CONTROL PANEL



BRX — SETS

The BRX basic sets all fit it to one bag for easy transportation. Optional stand sets are available depending on your needs, such as the 88-235 cm stands or air cushioned 105-264 cm stands. All sets come with two Portalites, which when combined with the optional deflector set, take advantage of the unique Elinchrom central shaft.



BRX 250/500 TO GO

N° 20757.2

| Qty | Code n° | Article |
|-----|---------|------------------------------|
| 1x | 20440.1 | BRX 250 |
| 1x | 20441.1 | BRX 500 |
| 1x | 19350 | EL-Skyport Transmitter Speed |
| 1x | 11088 | Sync cable 5 m |
| 2x | 26129 | Portalite softbox 66 x 66 cm |
| 1x | 33199 | Tube bag for 2 BRX |

BRX 250/250 TO GO

N° 20756.2

| Qty | Code n° | Article |
|-----|---------|------------------------------|
| 2x | 20440.1 | BRX 250 |
| 1x | 19350 | EL-Skyport Transmitter Speed |
| 1x | 11088 | Sync cable 5 m |
| 2x | 26129 | Portalite softbox 66 x 66 cm |
| 1x | 33199 | Tube bag for 2 BRX |



BRX 500/500 TO GO

N° 20758.2

| Qty | Code n° | Article |
|-----|---------|---|
| 2x | 20441.1 | BRX 500, mains cable, flashtube, modelling lamp |
| 1x | 19350 | EL-Skyport Transmitter Speed |
| 1x | 11088 | Sync cable 5 m |
| 2x | 26129 | Portalite softbox 66 x 66 cm |
| 1x | 33199 | Tube bag for 2 BRX |

| Qty | Code n° | Article |
|-----|---------|---|
| 1x | 30162 | Tripod set 2 (2x 88 – 235 cm with bag) |
| 1x | 31052 | Tripod Air set (2x air cushioned 105 - 264 cm with bag) |

SWISS STUDIO FLASH SYSTEM

The ELC Pro HD compact is Elinchrom's latest unit.

Available as either 500 Ws or 1000 Ws these units are the highest performing and most professional units on the market.

Equipped with an OLED display for an easy and precise user experience the ELC Pro HD benefits from cutting edge technology.

Recycling times are lightning fast while Swiss precision guarantees constant power time after time, shot after shot.

But hardware isn't all. The software built into this unit gives you the freedom to configure the ELC to your individual style of shooting, for every application.



ELC Pro HD 500 — 500 Ws — N° 20613.1

ELC Pro HD 1000 — 1000 Ws — N° 20616.1

FEATURES

- Skyport delivers the most comprehensive synchronisation and control, and it's unique to the whole Elinchrom system. Your creative edge in lighting. See page 26.
- Intelligent pre-flash detector system enables full use with speedlights.
- Power auto-dump.
- 5V sync socket for maximum protection of digital cameras.
- Intelligent thermally controlled, low noise cooling fan.
- Multi-voltage auto-detection: 90-270 V (excluding modelling lamp).
- Visual Flash Confirmation option. The modelling lamp switches off/on to confirm the flash has been triggered.
- Adjustable proportionality of the modelling lamp range.
- Programmable ready beep tone.
- The accessory bayonet accepts all accessories.
- Centred 7 mm umbrella shaft enables also the use of the unique Elinchrom Deflector set.
- User replaceable plug-in high performance flash tube

WHY ELC PRO HD 500/1000 ?

- Superfast flash durations across the complete power range with visual confirmation on the OLED display.
- ELC Pro HD 500: up to 1/5000s
ELC Pro HD 1000: up to 1/5260s
- Huge power range;
ELC Pro HD 500 - 7 f-stops and
ELC Pro HD 1000 - 8 f-stops.
- User selectable and even shorter recycling times. Now you will never miss a shot!
- Even better colour and power stability.
- Unique OLED power display for information and clarity.
- Three unique creative modes;
Strobo mode, up to 20 Hz
- Delayed mode, from 0.001 – 10s, for second curtain sync and other effects.
- Sequence mode, up to 20 units can be synchronised in sequence to keep up with the fastest motor-drive at up to the full power of the flash.
- All special features utilise the full flash curve with normal colour balance.

CONTROL PANEL



Depending upon how much power you need there are various ELC Pro HD sets available each of which fit into one elegant carrybag. Optional stand sets are available depending on your needs.



ELC PRO HD 500/500 TO GO

N° 20666.2

| Qty | Code n° | Article |
|-----|---------|--|
| 2x | 20613.1 | ELC Pro HD 500; incl. 300 W halogen lamp |
| 2x | 24916 | Glass dome transparent |
| 1x | 19350 | EL-Skyport Transmitter Speed |
| 1x | 11088 | Sync cable 5 m |
| 2x | 26143 | Wide reflector 16cm 90° |
| 1x | 33196 | ProTec Bag Poly |

Tripods are not included

ELC PRO HD 1000/1000 TO GO

N° 20667.2

| Qty | Code n° | Article |
|-----|---------|---|
| 2x | 20616.1 | ELC Pro HD 1000; incl. 300 W halogen lamp |
| 2x | 24916 | Glass dome transparent |
| 1x | 19350 | EL-Skyport Transmitter Speed |
| 1x | 11088 | Sync cable 5 m |
| 2x | 26143 | Wide reflector 16cm 90° |
| 1x | 33196 | ProTec Bag Poly |

Tripods are not included



OPTIONAL TRIPOD SETS

| Qty | Code n° | Article |
|-----|---------|---|
| 1x | 30162 | Tripod set 2 (2x 88 – 235 cm with bag) |
| 1x | 31052 | Tripod Air set (2x air cushioned 105 – 264 cm with bag) |



POWER
PACKS



DIGITAL RX

Elinchrom has a long tradition of excellent power packs designed for professional imaging.

The latest Digital RX series incorporates electronic know-how combined with high manufacturing quality at attractive prices. Highlights such as control via MAC® / WIN® computers, remote control with the EL-Skyport App for iPod Touch® / iPad® / iPhone®, ultra stable circuitry for consistent flash power, low sync voltage to protect digital cameras, these are just some of the many advantages of this series.

FEATURES

- EL-Skyport: radio remote control and triggering! Adjust power and switch on/off the modelling lamp with the Skyport Transmitter speed and the Transceiver RX, from the camera.
- Unique control from an iPod Touch®/iPad®/iPhone® with the EL-Skyport App via the optional WiFi module.
- Link your complete RX studio with the EL-Skyport Software, control up to 4 studios of 16 units with EL-Skyport and access extra features like flash counter or flash delay for strobing effects.
- Ultra stable circuitry for absolutely consistent flash power.
- Unique dedicated Zoom Pro HD flash head for heavy-duty use.
- High speed Zoom Action and Zoom Pro heads for fashion and general purpose photography.
- Digital power display for precise and repeatable exposures.
- Digital power values compatible with the Elinchrom system.
- Modelling lamps proportional or independently controlled.
- Fast recycling consistent with precision and stability.
- Surge resistant circuits, Auto-dump, twin sync sockets, ready beep, sensitive photocell, anti shock edgings and fan cooled.



Digital 1200 RX | 1200 Ws

230 V — N° 10256.1s

110 V — N° 10255.1s

Digital 2400 RX | 2400 Ws

230 V — N° 10258.1s

110 V — N° 10257.1s

RX Hand Remote Control

N° 19342

ZOOM HEADS

These flash heads offer a new focusable flashtube and modelling lamp arrangement, to fine tune the lightning characteristic of every accessory fitted.

They also incorporate a microprocessor controlled low noise fan cooling system, a new transparent glass dome and a new user replaceable plug-in flashtube. The zoom function is accessible from both sides of the head housing. These heads are compatible with all power packs made by Elinchrom since 1979.



CARACTERISTICS & FEATURES

- Small UV coated flashtube diameters for short flash durations and better light control.
- User replaceable plug-in flashtube.
- Transparent security glass dome. An optional frosted glass dome is available.
- Zoom Heads can either be used with 110 V or 230 V Elinchrom power packs. The halogen modelling lamp and fuse must conform to the correct mains voltage and value.
- Efficient inner dish reflector, with a 90° light distribution to maximise light output.
- Zoom function for flashtube and modelling lamp for individual light control.
- Reflector-bayonet with breech locking ring, fits all Elinchrom accessories since 1974.
- Centered umbrella fitting with additional umbrella holder on the tilt head.
- Efficient low noise fan cooling. The fan spins slowly at low temperatures and fast when the head heats up.
- Illuminated on/off modelling lamp switch, with LED overheat indication. When the red warning LED lights up the halogen modelling lamp shuts off until the head cools down. The flash function is still active.
- Aluminium chassis with fire resistant housing.
- Extremely lightweight, only 2.3 kg, including the 5 m heavy-duty flash cable.



Zoom Pro HD

N° 20192

The ZOOM PRO HD is designed to withstand extreme use. The heavy-duty and high quality plug-in flashtube offers long and consistent performance. The ZOOM PRO HD is the best choice for intensive catalogue, 3D turntable imaging.



ZOOM Head Extension Cable

5 m — N° 21040
10 m — N° 21041



Zoom Action

N° 20193

The ZOOM ACTION offers a very short flash duration for action freezing photography. The new A (Action) tube delivers a 40-45% shorter flash duration compared to standard omega (horseshoe type) flashtubes. Action = Elinchrom.



Zoom Pro

N° 20191

The ZOOM PRO is designed for general use and is equipped with a standard 3000 Ws omega plug-in flashtube it offers a spectacular balance of performance and value.



Glass Dome Transparent

N° 24918

Included standard glass dome for the ZOOM flash head and SCANLITE Halogen.



Glass Dome Frosted

N° 24919

This frosted glass dome will soften edges of shadows and offer a wider even light distribution while protecting the halogen lamp. Fits all Zoom heads and SCANLITE Halogen.



Plug-In flashtube for **Zoom Pro HD** — N° 24082



Plug-In flashtube for **Zoom Pro** — N° 24081



Plug-In flashtube for **Zoom Action** — N° 24083



HALOGEN LAMPS

MAX. 300 W / 230 V Halogen GX 6.35 — N° 23022

MAX. 300 W / 110 V Halogen GX 6.35 — N° 23030



Ringflash Glass-Diffuser

N° 402.013

Diffuse the ringflash by replacing the protection glass filter with this matt glass diffuser.

ProTec Bag Poly

N° 33196

This high quality nylon shoulder bag enables photographers to safely carry and store up to 1 Digital RX pack and 1 Zoom head.



Ringflash 3000

N° 20494

Dedicated to EL powerpacks, this fashionable light source allows most cameras to be fitted within the centre. The RF 3000 has a 4-pole flashtube which provides very short flash durations.



BATTERY
FLASH
SYSTEM



RANGER QUADRA HYBRID AS RX

The Ranger Quadra Hybrid AS RX is a compact portable 400Ws battery flash system for studio and outdoors use.

Complete with fast recycling times, wireless trigger and remote options via the EL-Skyport, the Quadra Hybrid really is a perfect system for anyone who likes to work away from the mains. Our latest firmware manages flash power consistency, remote power variation, LED modelling lamp and even more RX features.

The choice of battery is up to the user. Lead-Gel batteries for low temperature robustness or Lithium-Ion batteries for light weight and high flash capacity. Two heads are available for the RQ system: an A (Action) head for action freezing flash durations and a S (Standard) head for maximum flash power and HyperSync™ applications.




Quadra Hybrid
N° 10266.1
with Lead-Gel battery

Quadra Hybrid
N° 10268.1
with Li-Ion battery

FEATURES

- Take full control of your units with the EL-Skyport App* for iPod Touch® / iPad® / iPhone® via the optional WiFi module!
- The Ranger Quadra Hybrid AS RX is compatible with Lead-Gel and Lithium-Ion batteries.
- Bright LED modelling lamps are fitted to the RQ Hybrid Flash Heads
- Built-in EL-Skyport radio receiver for triggering, power adjustment and modelling lamp switching with the EL Skyport Transmitter Speed.
- EL-Skyport has 8 frequency channels with 4 groups.
- EL-Skyport Speed sync mode for synchronization up to a 1/320 s on enabled SLR cameras.
- Additional features can be found when used with the EL-Skyport Software, such as flash-delay for second curtain sync etc.
- Two power outlets – 2:1 ratio, Single high power channel and single superfast channel.
- Pre-flash detector system to enable the use of Quadra Hybrid with speedlights.
- Programmable ready beep function.
- Auto energy saver.
- 5V sync socket for maximum protection of digital cameras.
- Only 2 kg with Lithium battery and 3 kg with Lead-Gel!
- Super small and lightweight heads – compact and only 0.25kg!
- Action flashtube for sharper images – reach an incredible 1/5700 th of a second with an Action head!
- With the EL-Reflector Adapter all accessories and Rotalux softboxes up to 135 cm can be used.
- Wide range of compact accessories for the most portable use, and to maximise the working guide number.

CONTROL PANEL

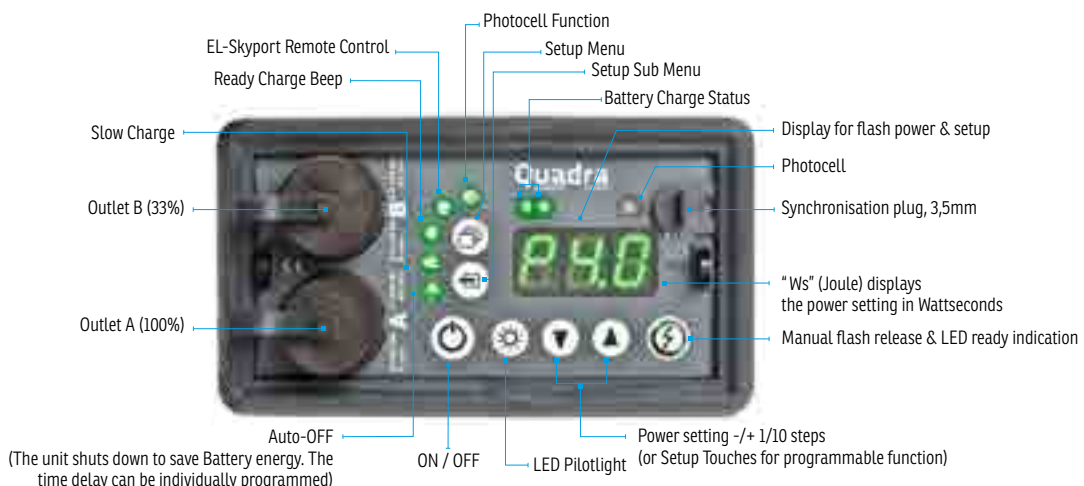

LEAD BATTERY ACCESSORIES

RQ Lead Battery 12 V 3.6 Ah

N° 19294

This spare Lead-Gel battery is rock solid and offers up to 140 flashes at full power.



RQ Lead Car Charger 12 V

N° 11093

Charges the RQ Lead-Gel battery from 12 V car outlets.



RQ Lead Charger

N° 19284

Dedicated charger for the RQ Lead-Gel battery. Includes mains adapters for EURO, UK and USA.



RQ Lead Set

N° 19298

This set includes a RQ Lead-Gel battery and a RQ Lead charger.



LITHIUM BATTERY ACCESSORIES

RQ Lithium Battery

N° 19295

This spare Lithium-Ion battery is very lightweight and offers up to 320 flashes at full power.



RQ Lithium Car Charger

N° 11037

Charges the RQ Lithium-Ion battery from 12 V car outlets.



RQ Lithium Charger

N° 19279

Dedicated charger to the RQ Lithium-Ion battery. Includes mains cable.



RQ Lithium Set

N° 19299

For existing RQ owners. This set includes a RQ Lithium-Ion battery and a RQ Lithium charger.



GENERAL ACCESSORIES

RQ Flash Head Cable

1.5 m – N° 11000

2.5 m – N° 11001

(standard cable)

3.5 m – N° 11002



RQ Adapter Cable for Ranger S/A Heads

N° 11036

Enables the use of flash heads of the Ranger RX system.



RQ Snappy

N° 19286

Offers carry comfort and protection. The Snappy requires the shoulder strap, which is included with every Quadra set.



RQ Extension Cable & Ringflash ECO

1 m – N° 11005

2 m – N° 11006

5 m – N° 11003

10 m – N° 11004

NOTE: Extension cables reduce the power output and slow down the flash duration.



RQ Shoulder Strap

N° 19287

Air cushioned shoulder strap, adjustable, made of non-slip fabric.



RQ Adapter Cable for Power Pack Heads

N° 11097

Enables the use of EL Power Pack Flash heads with RQ packs.



RQ Set Case

N° 33200

This carrying case for Quadra Sets has a new robust design, with pressure equalization valve, easy large lock opener and a rubberised large handle. This case will keep out dust, humidity and is shock proof.

L x W x H: 55 x 18 x 48.5 cm



ProTec Bag Poly

N° 33196

This high quality nylon shoulder bag enables photographers to safely carry and store up to 2 Quadra Hybrid packs with batteries and several Quadra Hybrid heads and accessories.



GENERAL ACCESSORIES

RQ Hybrid Action Head

N° 20134

Ultra lightweight and compact with detachable flash cable; plug-in A flashtube and LED modelling light for ACTION photography with ultra short flash duration.



RQ Hybrid Standard Head

N° 20139

Ultra lightweight and compact with detachable flash cable; plug-in S flashtube and LED modelling light for universal outdoor photography.



RQ Ringflash PRO

N° 20495

The ultimate combination for in and outdoor photography! The RQ Ringflash PRO, with 4-pole flashtube, freezes movement with a 1/4500 s (t0.5) at full power. The 2 metre flash cable enables photographers to use it freehand.



RQ Ringflash ECO – N° 20492

This RQ Ringflash is as portable as a ringflash gets. Accepting up to 400 Ws with a standard 2-pole flashtube, the RQ Ringflash ECO is an ideal fill light for fashion and beauty photography. A white diffuser cap and a 2 m detachable cable are included.



RQ A Plug-In Flashtube

N° 24000

High quality, long-life, A-Type (action) flashtube for RQ Action heads.



RQ S Plug-In Flashtube

N° 24009

High quality, long-life, S-Type (standard) flashtube for RQ Standard heads.



Quadra Reflector Adapter MK-II

N° 26342

This new improved adapter enables photographers to use any accessory of the Elinchrom range such as Rotalux softboxes, Indirect Softlites and other Elinchrom accessories.



RQ Portalite Octa 56 cm

N° 26600

The RQ Portalite octagonal offers a wide soft light, ideal for portraiture, beauty and people photography. Combined with the optional deflector set - gold, silver, translucent and frost - the softness / hardness and colour can be modified. It can even be used as a fold up beauty dish!



RQ Portalite 40 x 40 cm

N° 26151

The RQ portalite is easy to set up and ultra transportable. This small size softbox offers a nice soft light when used with the outer diffuser. Access to the umbrella holder is maintained to allow for the use of deflectors.



Tripod Set 52-190cm

N° 31050

Super portable tripods ideal for use in conjunction with the "Quadra Hybrid system".



EL Boom Arm 63-156 cm

N° 31049

Allows the Quadra Hybrid heads to go places other systems just can't reach.



RQ Multi-function Cap

N° 25100

Three in one: Protection for the LED and flashtube, frosted diffusion of light and filter support, which accepts coloured gelatin filters. The cap fits the RQ 13.5 cm reflector.



RQ Reflector 70°

13.5 cm – N° 26145

This reflector, part of single heads and sets, offers a wide-angle light distribution as stand alone or umbrella reflector.



RQ Reflector 56°

18 cm – N° 26056


This reflector combines a high output with a good spread of light while the internal recess accepts 18 cm Grids and supports umbrellas.

Grid 18 cm

30° 26100

20° 26101

12° 26102



The Quadra Hybrid Pro Sets offer all the power and flexibility you could need. They are delivered with 2 batteries and a fast charger so there is always power to spare.

QUADRA HYBRID PRO SET

A – Heads with Lead-Gel Batteries — N° 10405.1

S – Heads with Lead-Gel Batteries — N° 10406.1

A – Heads with Lithium-Ion Batteries — N° 10400.1

S – Heads with Lithium-Ion Batteries — N° 10401.1

| Qty | N° | Article |
|-----|-------------------|---|
| 1x | 10266.1 / 10268.1 | Quadra Hybrid with Lead-Gel or Lithium-Ion battery supplied with spare battery box, charger, sync cord and shoulder Strap |
| 2x | 20134 / 20139 | RQ Hybrid Head A or S Supplied with 2.5 m flash cable, modelling reflector 13.5 cm and multifunction cap |
| 1x | 19350 | EL-Skyport Transmitter Speed |
| 1x | 19294 / 19295 | Spare RQ battery/ Lead-Gel or Lithium-Ion depending on set choice. |
| 1x | 33200 | RQ set case |



The Quadra Hybrid Standard sets offer one head and one pack with one battery.



QUADRA HYBRID STANDARD SET

A – Head with Lead-Gel Battery — N° 10407.1

S – Head with Lead-Gel Battery — N° 10408.1

A – Head with Lithium-Ion Battery — N° 10402.1

S – Head with Lithium-Ion Battery — N° 10403.1

| Qty | N° | Article |
|-----|-------------------|---|
| 1x | 10266.1 / 10268.1 | Quadra Hybrid with Lead-Gel or Lithium-Ion battery Supplied with battery, charger, sync cord and shoulder strap |
| 1x | 20134 / 20139 | RQ Hybrid Head A or S Supplied with 2.5 m flash cable, modelling Reflector 13.5 cm and multifunction cap |

This set is ideal for anyone looking for extra versatility with 2x400 Ws when in the field.

With a 960 full power flash capacity, this is the smallest, lightest, most powerful off camera pro flash system, compatible with the full Elinchrom Studio Flash Accessory Range, via the Quadra Reflector Adapter.

RANGER QUADRA HYBRID LI-ION TWIN

Ranger Quadra Hybrid Li-Ion Twin Set A — N° 10410.2

Ranger Quadra Hybrid Li-Ion Twin Set S — N° 10411.2

| Qty | N° | Article |
|-----|---------------|---|
| 2x | 10268.1 | Quadra Hybrid with Lithium-Ion battery supplied with battery, charger, sync cord and shoulder strap |
| 2x | 20134 / 20139 | RQ Hybrid head A or S supplied with 2.5 m flash cable, reflector 13.5 cm and multifunction cap |
| 1x | 19350 | EL-Skyport Transmitter Speed |
| 1x | 19295 | Spare RQ Lithium-Ion battery |
| 1x | 33196 | ProTec bag poly |



The Quadra Hybrid Ringflash Set is ideal for many applications such as fashion, portrait, nature, medical, dental and research imaging.



RANGER QUADRA RINGFLASH SET

Quadra Hybrid Ringflash Eco Set with Lead-Gel Battery — N° 10409.1

Quadra Hybrid Ringflash Eco Set with Lithium-Ion Battery — N° 10404.1

| Qty | N° | Article |
|-----|-------------------|---|
| 1x | 10266.1 / 10268.1 | Quadra Hybrid with Lead-Gel or Lithium-Ion battery supplied with battery, charger, sync cord and shoulder strap |
| 1x | 20492 | RQ Ringflash ECO Supplied with UV coated plastic protection filter, white Plexiglas diffuser and detachable 2 m flash cable |
| 1x | 19350 | EL-Skyport Transmitter Speed |

RANGER RX

The Ranger RX Speed AS is a 1100 Ws portable battery pack unit. Recycling at full power in 3 seconds and delivering up to 250 flashes at full power makes this battery unit very powerful. Its 2:1 asymmetrical output allows fast flash durations while the 7 f-stops power range allows for precise control of light.

Incorporating the most advanced miniaturised components weighing in at 8 kg – and controllable by EL-Skyport remote control, by iDevices™, computer or by handset, the Ranger RX increases enormously the ease of using light on location. It's weather resistant design is also extremely useful.




Ranger RX Speed AS
N° 10267.1S

FEATURES

- EL-Skyport: radio remote control and triggering! Set flash power and switch on/off the modelling lamp with the ELS transmitter speed.
- Unique control from iPod Touch®/iPad®/iPhone® with the EL-Skyport App via the optional WiFi module!
- Remote Control your Ranger RX units with the EL-Skyport Software, Control up to 4 studios of 16 units and access extra features like flash counter or flash delay for second curtain sync and other effects.
- Consistent flash power at any power level.
- 7 f-stop range.
- Power saving, auto cut off to save energy.
- Modelling lamp modes: 15s, 30s & off.
- Photocell – adapted to work in bright ambient light.
- Auto dump.
- Battery box quick release, replace batteries in seconds.
- Fast battery recharging time: 3 hours to full power!
- No memory effect on the battery. The electronics protect the battery from over and complete discharging.
- Battery charger indicator, two green LED's show 100%, one green 50% and one red LED 10%.
- Multivoltage charger with European, USA and UK adapters.
- Moisture resistant rubber protectors.
- Raised sockets complete with cover: the electronics are only in the upper part of the unit.

CONTROL PANEL

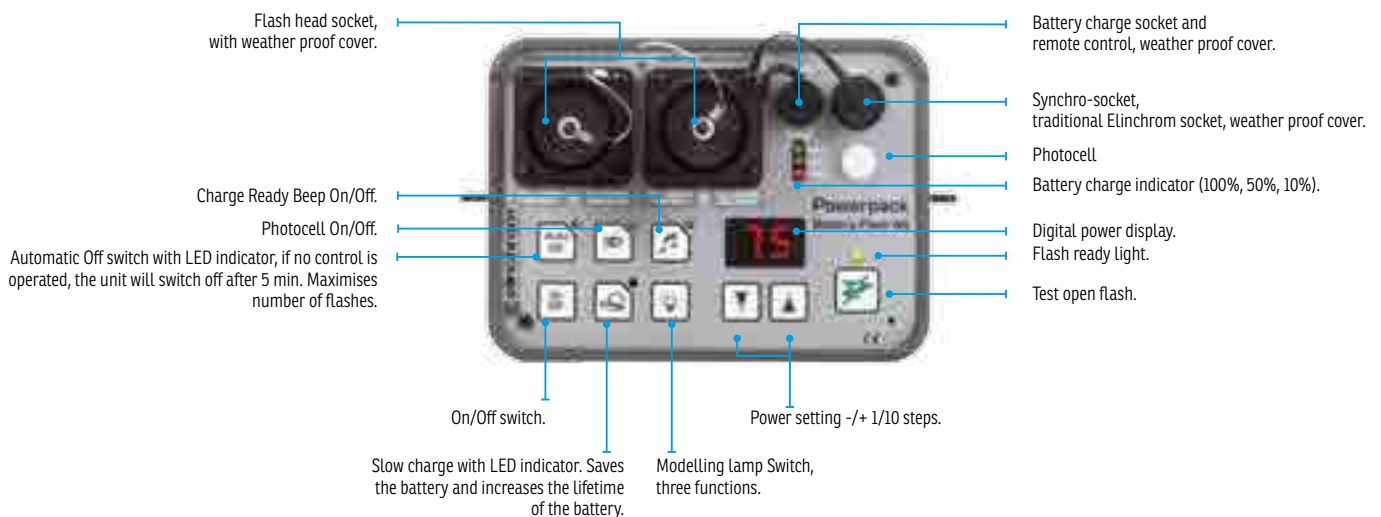

ACCESSORIES FOR RANGER RX SPEED AS



Ranger RX S Standard Head

N° 20100

For universal use, head with a long-life flash tube.



Ranger RX A Action Head

N° 20101

Unique super short flash duration head.



Ranger Ringflash 1500

N° 20493

The ultimate combination for in and outdoor photography! The Ringflash 1500, a 4-pole flashtube, freezes movement with a flash duration of 1/2600 s (t0.5) at full power. The 2 metre flash cable enables photographers to use it freehand. The 10 cm inner diameter will accept a wide range of cameras and lenses.

EL-Skyport Transceiver RX Adapter — N° 19374

The Adapter is required for the EL- Skyport Transceiver RX.



Ranger Adapter Cable — N° 11095

Adapts EL power pack flash heads to the Ranger RX battery packs. (Mains modelling lamp and fan are deactivated.)



Car Battery Charger 12V

N° 11093

This device charges the Ranger RX batteries from any 12 V car accessory plugs.



Ranger A/S Extension Cable

N° 11096

4 m only for Ranger S and A flash heads.



Ranger RX Adapter cable 20 cm

N° 11110



EL-Power Pack Case

N° 33215

This case fits Ranger RX or Digital RX power packs and two of their flash heads.



EL Ranger Snappy

N° 19288

The Ranger Snappy is a lightweight and easy to fit carrying option with an ergonomically designed shoulder strap. Fits to all Ranger RX models.

Shoulder Strap

N° 19289





Multivoltage Quickcharger

N° 192835

Only for Ranger RX Speed & Ranger RX Speed AS.



ProTec Bag Poly

N° 33196

This high quality nylon shoulder bag enables photographers to safely carry and store up to 1 Ranger RX Speed As battery pack and 1 Ranger head.



Battery Box

N° 19280

Includes the battery for approximately 250 flashes at full power.



RANGER RX BASIC SET

A – Ranger RX Speed AS / A Head — N° 10276.1

S – Ranger RX Speed AS / S Head — N° 10273.1

| Qty | N° | Article |
|-----|---------------|---|
| 1x | 10267.1S | Ranger RX Speed AS, incl. shoulder strap, battery, sync cord, multivoltage charger, EL-Skyport Remote Adapter |
| 1x | 20100 / 20101 | Ranger A or S – Head, 50 W modelling lamp, 3 m flash head cable |



RANGER RX PRO SET

A – Ranger RX Speed AS / A Head — N° 10287.1

S – Ranger RX Speed AS / S Head — N° 10282.1

| Anz. | Art. Nr. | Artikle |
|------|---------------|---|
| 1x | 10267.1S | Ranger RX Speed AS, incl. shoulder strap, battery, sync cord, multivoltage charger, EL-Skyport Remote Adapter |
| 1x | 20100 / 20101 | Ranger A or S – Head, 50 W modelling lamp, 3 m flash head cable |
| 1x | 26386 | Varistar umbrella set 85 cm, includes Varistar reflector 24 cm |
| 1x | 26144 | Reflector 18 cm / 60° |
| 1x | 33215 | EL-Carrying Case |
| 1x | 19280 | Spare Battery Box |



RADIO
REMOTE
SYSTEM



EL-SKYPORT SYSTEM

The EL-Skyport system allows photographer's to break free from sync cords and unreliable IR systems. Many improvements have been made to the EL-Skyport system since its launch.

Various levels of function and control are available depending on the units you have: The Universal receiver module can trigger cameras via optional shutter release cables and is compatible with all Elinchrom classic units, most speedlights and most other flash brands for triggering.

Units with built-in Skyport such as D-lite RX One, D-Lite RX 2 / 4, BRX 250 / 500, ELC Pro HD 500 / 1000 and Ranger Quadra Hybrid can be triggered and have the additional control of power settings and modelling lamp on/off.

The Digital RX series and the Ranger RX series all require the additional Transceiver RX module to be used, when the control of power settings and modelling on/off is also available. On these units, the SPEED sync mode can be activated via the EL-Skyport Software.

DISTANCE RANGE

Indoors Range

Up to 60 m in Normal sync mode.
Up to 40 m in Speed sync mode.

Outdoors Range

Up to 120 m in Normal sync mode.
Up to 70 m in Speed sync mode.

FEATURES

Available programmable features depend on the RX flash unit and Firmware.

From any of the three RX Remote Control Points, the following features are available:



RX Remote Control Features

- Flash Triggering
- Flash power up/down settings
- Modelling Lamp on/off
- Groups / Frequency Channels
Select 4 working groups and 8 frequency channels to separate working areas.
- Normal or Speed sync mode

Additional Features with the WiFi Module & Mobile Application

- Photocell on/off
- Eye-Cell Pre-flash management
- Ready Sound on/off
Ready flash confirmation
- Slow Recharging
- Auto Off
For Quadra & Ranger, to save battery power
- Head Socket Selection for power packs
- Stand By
- Proportional Modelling Lamp Setup

Additional Features with EL-Skyport Computer Software

- Photo Job
the Virtual Studio Management simulates, saves and restores studio lighting setups. Unit settings can be applied automatically.
- Flash Delay programmable
- Flash Sync Sequence programmable for up to 20 flash units per second
- Flash Counter registers the total number of flashes the unit ever made, useful for rental and service.
- Temperature Display indicates the internal temperature of the flash unit.
- Firmware Update option for RX units.
- On/Off Counter useful information for rental and service.

LEGEND

RX Remote Control

The continuous lines show controllable RX features. The RX features available depending on the EL-Skyport module, the flash unit type and the Firmware version.

Universal Receiver Speed


The dashed lines show the general basic features of the Universal Receiver Speed.

RX Remote Control Points

The Transmitter Speed, EL-Skyport computer software and the application for mobile devices can operate and control features and functions of RX flash units, by using the optional USB RX and WiFi modules.

RX Communication Nodes


Are showing the EL-Skyport modules, which enable communication between RX flash units and remote control points such as computers or mobile devices.

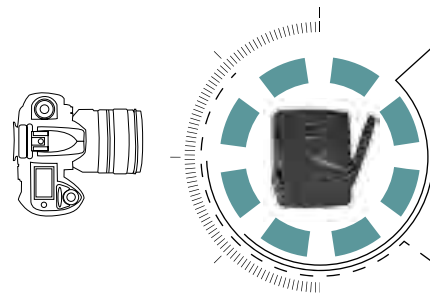

EL-Skyport Transmitter Speed

N° 19350

RX Remote Control Features

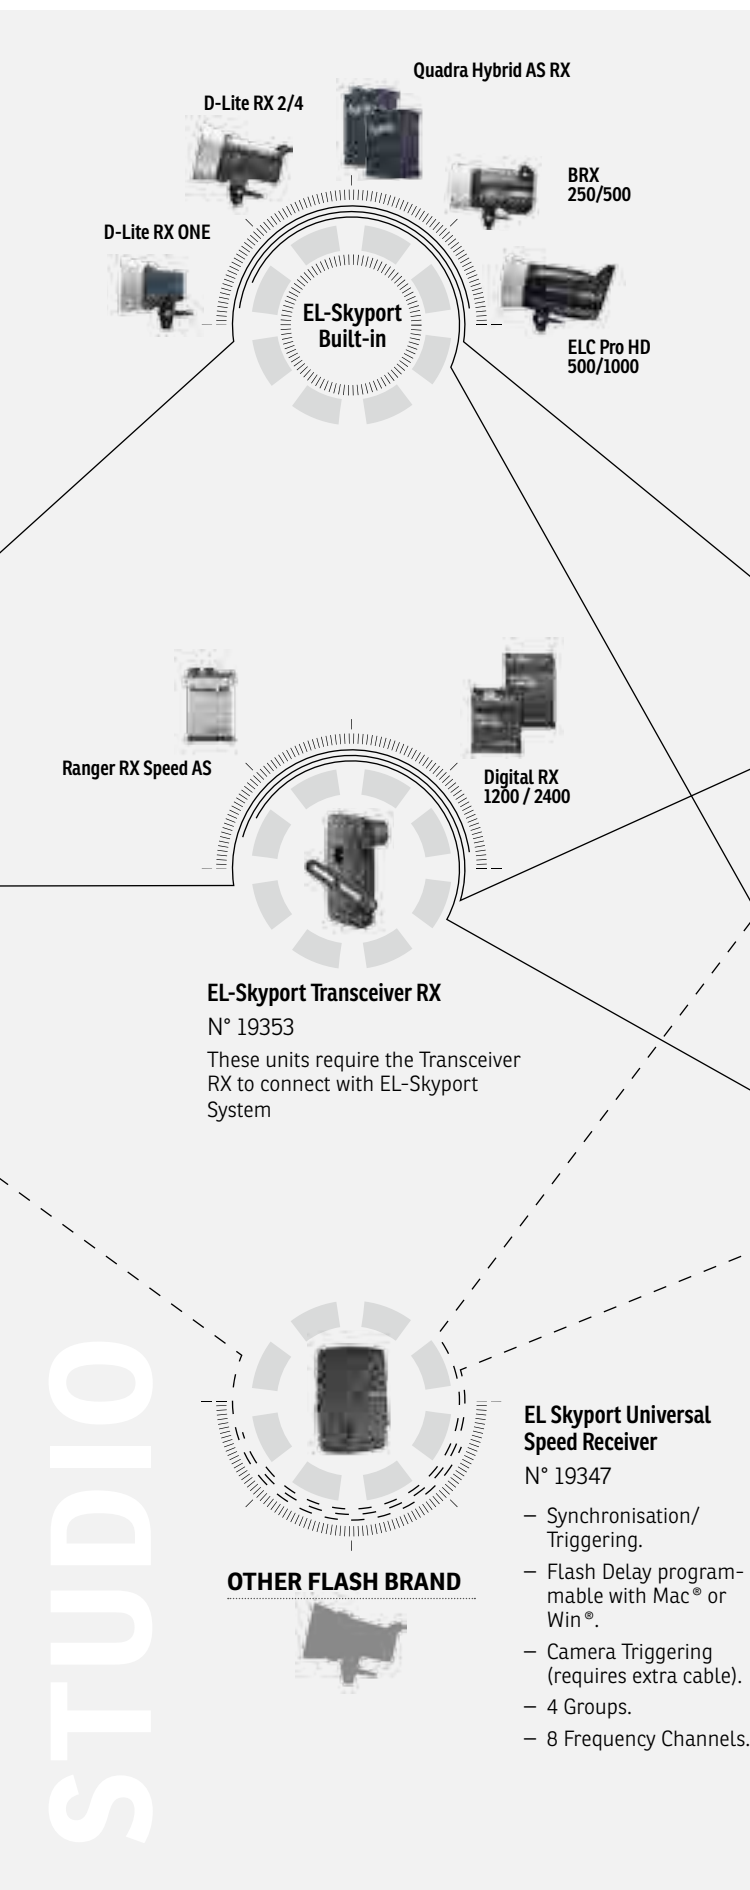

EL-Skyport Computer Remote System

Control and programming of RX features for Elinchrom RX flash units with the built-in EL-Skyport Receiver or the plug in Transceiver RX module.

This requires the free EL-Skyport Software for Mac® or Win® computer and the optional USB RX module. Visit the [www.elinchrom.com / SUPPORT](http://www.elinchrom.com/SUPPORT) and download your free EL-Skyport software and USB driver.

EL-Skyport Software

<http://bc.gs/35>



EL-Skyport USB Speed MK-II

N° 19363


The USB Speed module connects your computer to the Skyport System.



EL-Skyport WiFi


N° 19356

Connects your iPhone®, iPad® or iPod Touch® to the EL-Skyport System



EL-Skyport App

<http://bc.gs/12>



EL-Skyport WiFi for iOS Devices

Control and set Elinchrom RX flash units with Apple® devices such as iPhone®, iPad® or iPod Touch®.

This requires the free EL-Skyport Application from the Apple® App Store and the optional EL-Skyport WiFi module.

OTHER FLASH BRAND



EL-Skyport Universal Speed Receiver

N° 19347

- Synchronisation/Triggering.
- Flash Delay programmable with Mac® or Win®.
- Camera Triggering (requires extra cable).
- 4 Groups.
- 8 Frequency Channels.

STUDIO

EL-SKYPORT TRANSMITTER SPEED

The ELS Transmitter Speed enables the triggering of units attached via a Universal Skyport module, all units with built-in Skyport and all Elinchrom units to which a Transceiver RX is attached.


The additional control of power settings and modelling lamp on/off can be achieved on all Elinchrom units with built-in Skyport RX (D-Lite RX One, D-Lite RX 2 / 4, BRX 250 / 500, ELC Pro HD 500 / 1000 and Ranger Quadra Hybrid) and on all Elinchrom units which require the Transceiver RX (Digital RX 1200/2400, and Ranger Speed AS).



EL-Skyport Transmitter Speed
N° 19350

FEATURES

- +/- buttons to change flash power settings and modelling lamp on/off.
- Test button for manual flash trigger.
- Switch selection for 8 different frequency channels.
- Switch selection for 4 different groups.
- All switch to control all units within Groups 1 to 4.
- LED status for sync mode and battery level status.
- Long life Lithium battery provides over 30000 flashes.
- Integrated hot-shoe with screw lock.
- Super small. Only 4 x 5 cm.
- Ultra lightweight. Only 36 g including the battery!

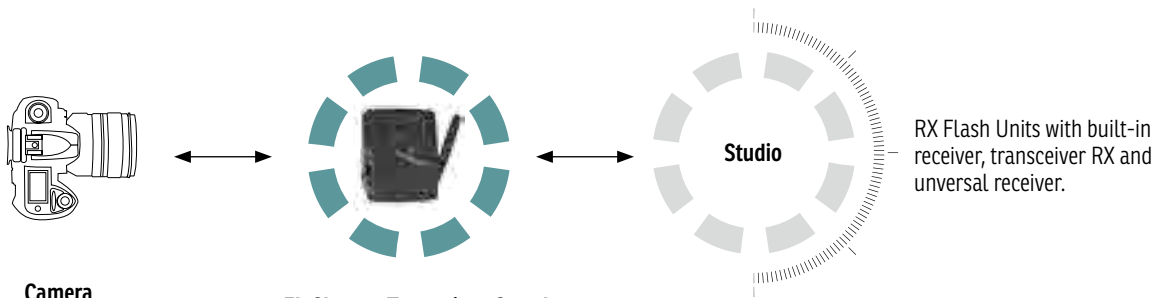

EL-Skyport Transmitter Speed
N° 19350
Set flash power up and down
Switch the modelling lamp on/off
4 groups / 8 frequency channels
for multi studio operations, within a single work place.



EL-SKYPORT UNIVERSAL SPEED RECEIVER

The Universal Speed Receiver is compatible with Classic Elinchrom units, most speedlights and most other flash brands. Allow yourself to use your studio flash units with your speedlights!

The Universal Speed Receiver includes a multivoltage charger with Euro, UK and USA mains adapters and EL-Standard sync and 3.5mm jack cables, to connect to other units.

The charger can be connected to the mains whilst the Universal Receiver is in use.



EL Skyport Universal Speed Receiver

N° 19347


EL-Skyport Universal Speed Receiver REPLACE

N° 19346

To purchase an ELS Universal Receiver REPLACE unit, a used Universal Receiver with a defective or end of life battery must be returned to the dealer. The defective Universal modules will then be recycled at Elinchrom to save the environment. The Universal Receiver REPLACE module does not include sync cables or charger.

FEATURES

- 30 hours of battery use.
- The Li-Ion battery recharges in approx. 3 hours with the charger included. No need for extra batteries.
- Auto-Standby function when not used for 4 hours.
- Integrated intelligent quick-charge circuit to recover deeply discharged batteries.
- Switch selection for 8 different frequency channels.
- Switch selection for 4 different groups.
- Camera triggering. This feature requires optional camera shutter release cables.
- Recognised by the EL-Skyport software for trigger and flash-delay options.
- Super small. Only 6.5 cm x 5 cm.
- Ultra lightweight. Only 54 g including the battery!

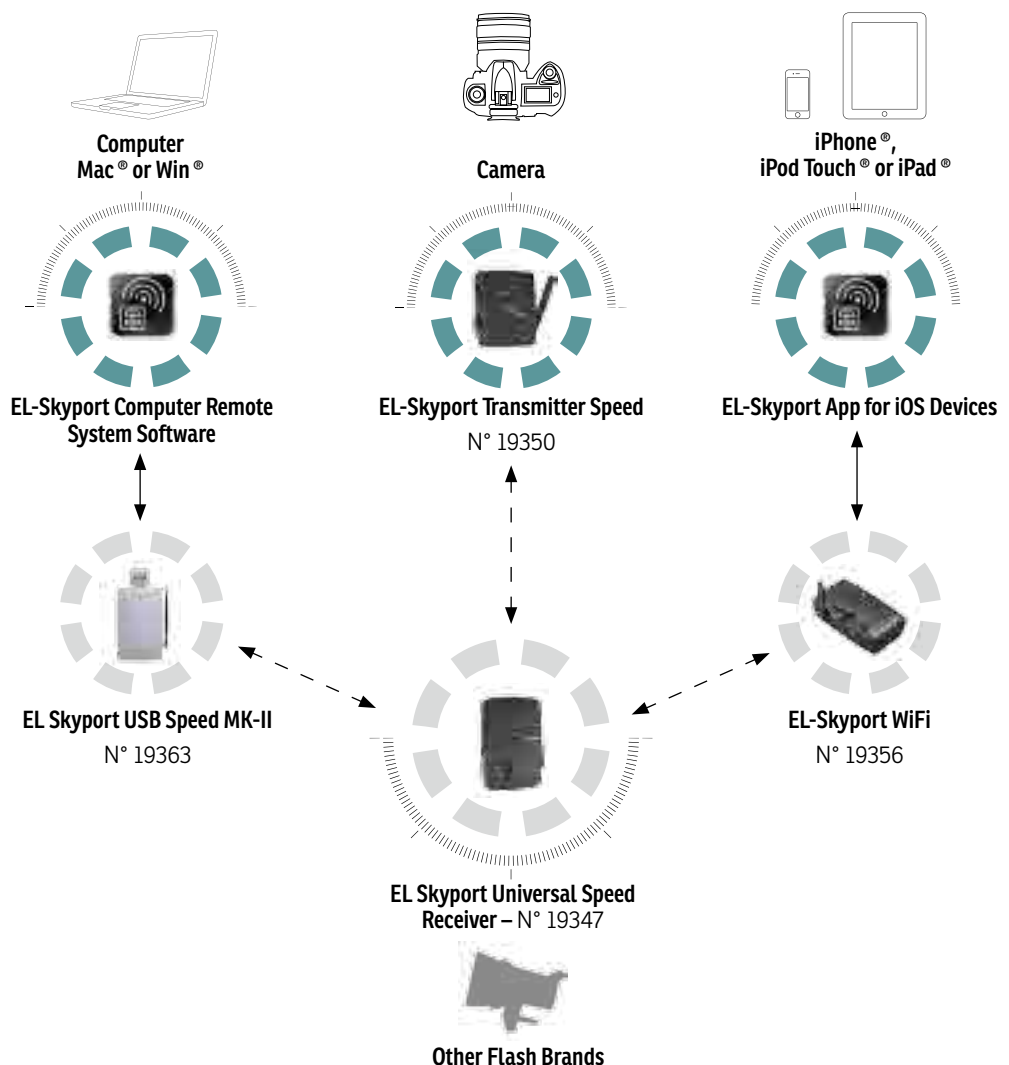

EL-SKYPORT TRANSCIVER RX

This module fits only to Elinchrom dedicated units such as the Digital RX series, the Ranger RX series and the Style RX series. No extra battery is required for the transceiver to be ready to use. For the Ranger RX series, the ELS Transceiver RX Adapter is required.

This module allows the control of power settings, modelling lamp on/off and flash synchronisation via the ELS-Transmitter. Basic features can also be controlled via Apple® devices with the optional WiFi module. Additional features such as flash delay and flash counter can be accessed with the EL-Skyport software.


The Speed mode function is also available for units which require the Transceiver RX via the EL-Skyport software, available as a free download for MAC® and WIN® at www.elinchrom.com



EL-Skyport Transceiver RX
N° 19353

FEATURES

- Switch selection for 8 different frequency channels.
- Switch selection for 4 different groups.
- Recognised by EL-Skyport software and the EL-Skyport Mobile App.

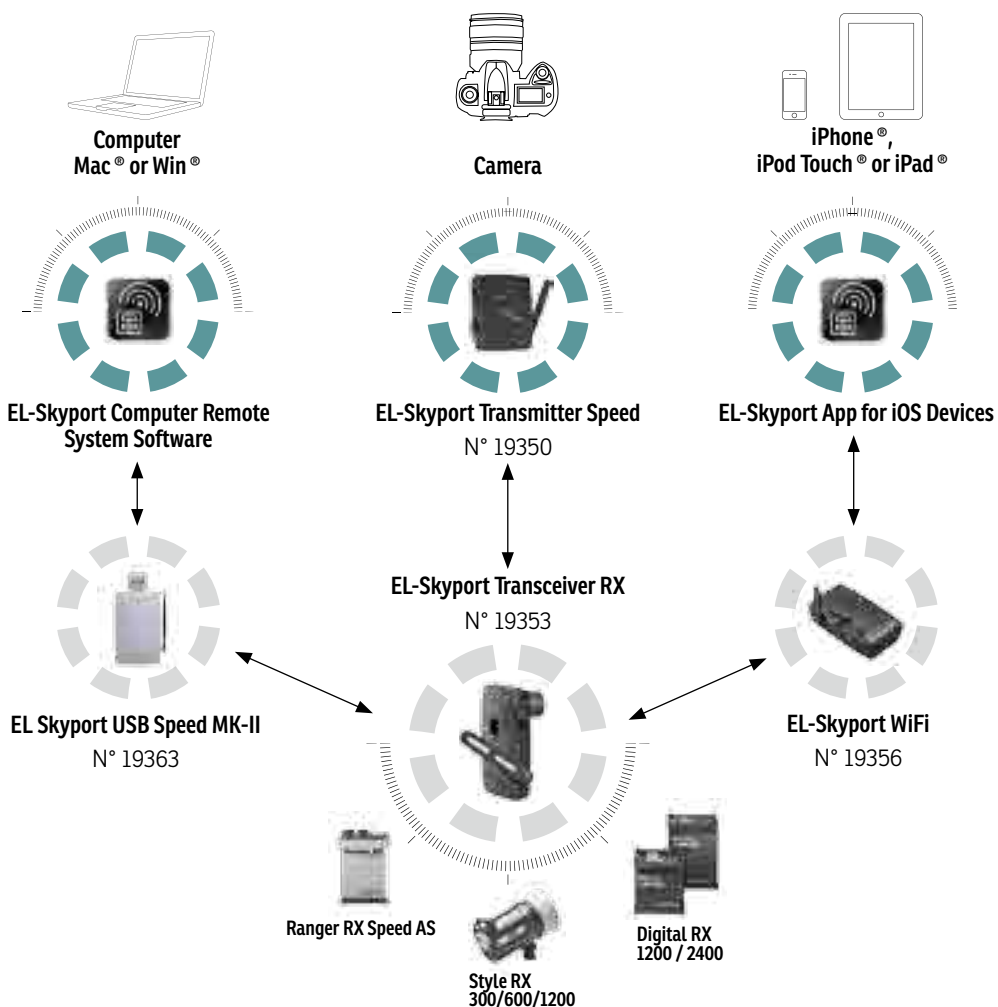

THE MOBILE APPLICATION FOR APPLE® DEVICES AND EL-SKYPORT WIFI

Uniquely Elinchrom Skyport. This is the first wireless system which enables the remote control and the remote triggering of Elinchrom RX flash units from Apple® mobile devices such as iPhone®, iPad® and iPod Touch®. The idea is to use devices for controlling flash units, which already exist in big volume in the market and which many owners consider to be the most practical and user friendly mobile devices ever. All Elinchrom RX units can be controlled but various features are accessible depending on the unit detected.

The Skyport WiFi module is the bridge between Apple® devices and Elinchrom flashes. This module can also act as a Universal Speed Receiver at the same time.



EL-Skyport WiFi
N° 19356




EL-Skyport App



Please download the iPhone® App from the App Store®
<http://bc.gs/12>

FEATURES

- Control features with an Apple® device.
- Frequency and group settings are adjustable on the application.
- Shares the same technical specification as the Universal module. See page 29.
- Up to 50 m outdoor in Wifi mode and up to a 100 m in Skyport mode.
- Up to 20 m indoor in Wifi mode and up to 40 m in Skyport mode.
- Wireless firmware update via the EL-Skyport software.

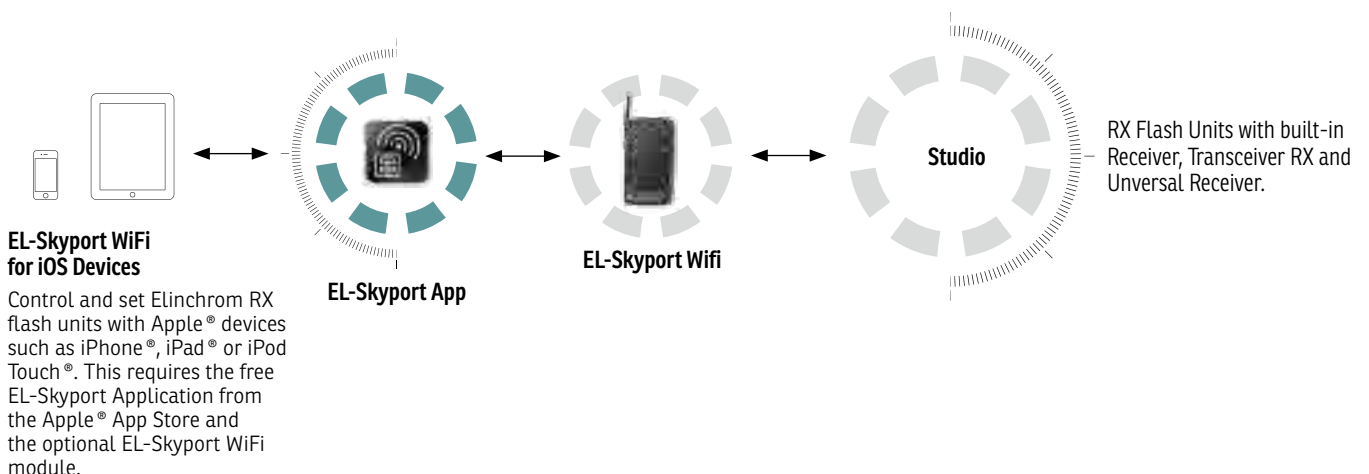

EL-SKYPORT STUDIO MANAGEMENT SOFTWARE

Managing one's studio can get tricky when many lights are involved. The Elinchrom Skyport Software provides the perfect solution. The latest release of the EL-Skyport Software has been developed to help photographers with their workflow.

Available as a free download from our website, the EL-Skyport allows photographers the ability to control all of their Elinchrom RX lighting equipment directly from their MAC® or WIN® operating systems.



EL-Skyport Studio Management Software

Get the software <http://bc.gs/35>



FEATURES


- Control the functions of all Elinchrom RX units.
- Firmware update.
- Programmable timer.
- ON/OFF flash counter.
- Photo Job studio management.

EL Skyport USB Speed MK-II

N° 19363 — This module

By installing the EL-Skyport Software all Elinchrom RX units can be controlled. The program will automatically search for units with Transceiver RX modules or with built-in Skyport RX receivers. The Universal module can also be detected but only offers flash synchronisation.

The latest EL-Skyport software can be downloaded free from our Support section at www.elinchrom.com

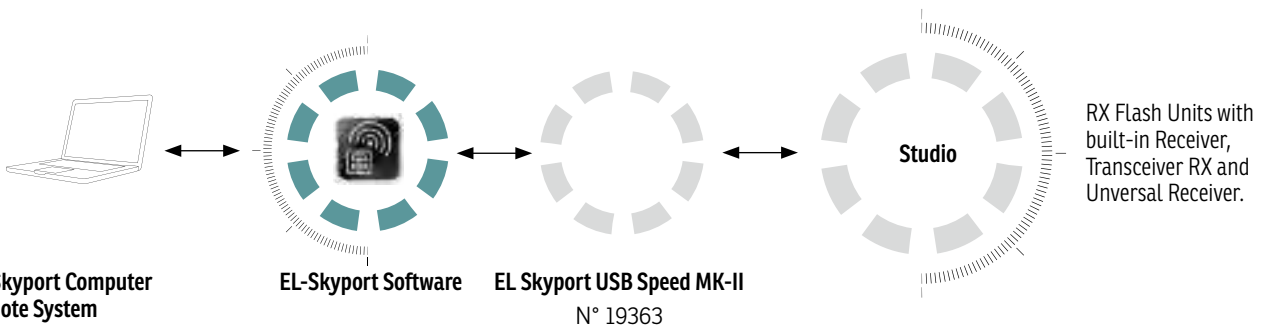

EL-Skyport Computer Remote System

Control and program the RX features of Elinchrom RX flash units with built-in EL-Skyport Receivers or the plug in Skyport Transceiver RX module.

This requires the free EL-Skyport Software for Mac® or Win® computer, and the optional Skyport USB RX module. Visit the www.elinchrom.com / SUPPORT and download your free EL-Skyport software and USB driver.

EL-SKYPORT UNIVERSAL SPEED TRIGGER SET

N° 19357

For classic Elinchrom flash units and other flash brands.

| Qty | N° | Article |
|-----|-------|--|
| 1x | 19350 | Transmitter Speed, incl. battery |
| 1x | 19346 | Universal Receiver Speed |
| 1x | 19355 | Multivoltage charger with Euro, UK and USA mains adapter |
| 1x | 11120 | Sync cable 20 cm, 2.5 mm jack – camera pc |
| 1x | 11122 | Sync cable 40 cm, 3.5 mm - 3.5 mm Jack |
| 1x | 11123 | Sync cable 40 cm, 3.5 mm jack - EL Standard Sync plug |
| 1x | 11126 | Sync Adapter 3.5 mm - PC female |
| 1x | 11125 | Sync Adapter 6.2 mm - 3.5 mm jack |



EL-SKYPORT RX TRIGGER SET

N° 19364

Only for Digital RX and Ranger RX battery units.

| Qty | N° | Article |
|-----|-------|---|
| 1x | 19350 | Transmitter Speed, incl. battery |
| 1x | 19353 | Transceiver RX |
| 1x | 11120 | Sync cable 20 cm, 2.5 mm jack - camera pc |

The latest EL-Skyport Software for MAC® or WIN® operating systems is required, which is available as a free download at www.elinchrom.com. The Ranger RX requires the ELS Transceiver RX Adapter 19374, which is included with every Ranger RX unit.

For further details, upgrades, news, the latest information about the EL-Skyport system and «how to do», please visit the Elinchrom website. In the support area the latest user guides and technical specifications can be downloaded. Technical data, features and functions of Elinchrom flash units and the EL-Skyport system may change without notice. No guarantee for misprints.



CONTINUOUS
LIGHT



SCANLITE HALOGEN 300 – 650 W

The Scanlite Halogen is an excellent choice for low cost digital photography, video and many other imaging requirements.

Often the choice of accessories to personalize the quality of continuous lighting is limited whereas with the Scanlite Halogen, most accessories are available and the Zoom function enables endless possibilities for your lighting! To cool down the whole system, the fan's speed is electronically temperature controlled and almost silent.

FEATURES

- Zoom function allowing more lighting options.
- Can be used either with a 300 W or a 650 W halogen lamp.
- Included transparent glass dome for protection.
- Intelligent low noise fan: The electronically controlled fan spins slower or faster depending on the internal temperature of the Scanlite.
- Multivoltage: The Scanlite can be used with 110 V or 230 V. The correct configuration of halogen lamps and fuse must be used.
- Small, robust and lightweight housing with large rubberised handle.
- Extra umbrella fitting for other umbrella shaft sizes.
- All Elinchrom reflectors, umbrellas and softboxes (except Portalite softboxes) can be used up to 300 W.
- All Elinchrom metal reflectors can be used up to 650 W (except Snoot reflector, reflectors with grids and fibre optic systems).



SCANLITE Halogen 300 / 650 W
N° 20998



Glass Dome Transparent — N° 24918
Included standard glass dome for the SCANLITE Halogen.



Glass Dome Frosted — N° 24919
The frosted glass dome will soften shadows, offer a wider light distribution and protect the halogen lamp.

SCANLITE HALOGEN SET — N° 20661

| Qty | N° | Article |
|-----|-------|------------------------------|
| 2x | 20998 | SCANLITE Halogen 300 / 650 W |
| 2x | 23022 | Halogen lamp 300 W / 230 V |
| 2x | 23005 | Halogen lamp 650 W / 230 V |
| 2x | 24918 | Glass dome - transparent |
| 2x | 26143 | Reflector 90° 16 cm |
| 1x | 33196 | ProTec Bag Poly |
| 2x | 27124 | Protective cap |

Note: Fuses and halogen lamps must correspond to the correct voltages!

Optional tripod sets are available. See page 51.



ACCESSORIES





ROTALUX

The rapid assembly Rotalux system is probably the most widely copied of all softbox systems. However, it is easier to copy a design than a quality and the Rotalux softboxes remain the best in their class. They are lightweight and unlike many other softboxes, fold down just like an umbrella and can be easily stored in the carrying bag, which is included.


The quality of light is outstanding because of their construction and the internal diffuser provides the softest and most even light possible. The optional deflector set takes advantage of the unique Elinchrom central shaft to modify the softness / hardness and colour like no other softbox system. Rotalux adapter rings are now also available for other brands of flash.



ROTALUX SOFTBOX

EVERY SOFBXES COMES WITH:

- Reflective Fabric
- External Diffuser
- Internal Diffuser
- Elinchrom Speed Ring
- Rods
- Carrying Bag
- Translucent deflector

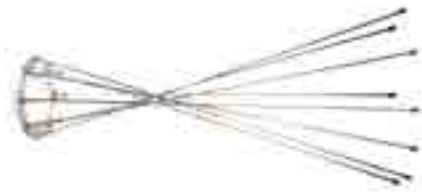

Rotalux Adapter Rings

Elinchrom users aren't the only ones who can take advantage from the best softbox system. There are now optional adapter speedrings for other brands of studio flash. Only one adapter ring is required for any shape and size of Rotalux.



360° rotating system for all Rotalux softboxes



Deflector Set (gold, translucent, silver, frost) — N° 26310

Elinchrom is the only flash system with the central umbrella fitting, which is essential when Reflectors or Rotalux softboxes are used with Deflector Sets. These accessories can eliminate, soften or tone sharp shadow edges. The set contains four different deflectors; gold, silver, frost and translucent, each of 14 cm diameter.

| N° | Brand |
|-------|--------------------|
| 26530 | Bowens |
| 26531 | Profoto |
| 26532 | Broncolor / Pulso |
| 26533 | Hensel / Expert EH |
| 26534 | Alien Bee / Balcar |
| 26535 | Comet |
| 26536 | Photona |

SQUARE


Rotalux square softboxes are good for head and shoulder portraits, products or for use in smaller spaces. The catchlight can be similar to windows.



1. **Rotalux 70 x 70 cm** — N° 26178
Depth: 32 cm — Weight: 1.07 kg
2. **Hooded Diffuser 70 x 70 cm** — N° 26322
3. **RotaGrid 70 x 70 cm** — N° 26117
4. **Rotalux 100 x 100 cm** — N° 26179
Depth: 42 cm — Weight: 1.42 kg
5. **Hooded Diffuser 100 x 100 cm** — N° 26323

STRIP

Rotalux strip softboxes are great for product photography, especially bottles and other curved reflective items. They can also be used for $\frac{3}{4}$ length portraits and are also widely used to light backgrounds where the length helps avoid fall-off from top to bottom.

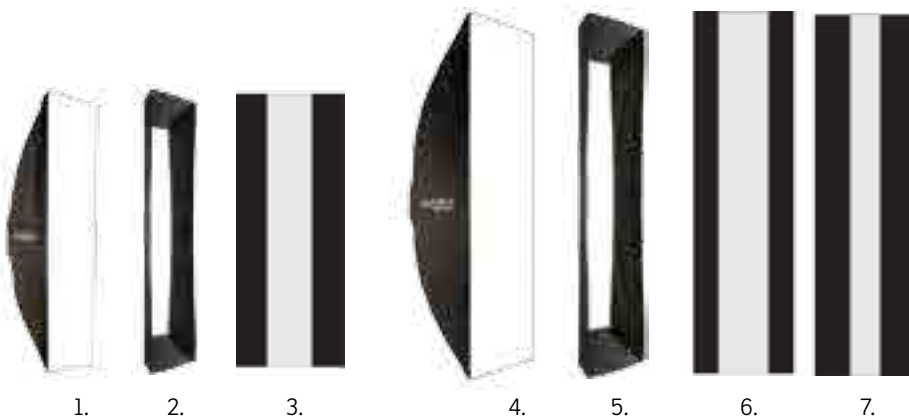

1. **Rotalux 35 x 90 cm** — N° 26180
Depth: 25 cm — Weight: 0.97 kg
2. **Hooded Diffuser 35 x 90 cm** — N° 26324
3. **Strip Diffuser 15 x 90 cm** — N° 26268
4. **Rotalux 50 x 130 cm** — N° 26181
Depth: 42 cm — Weight: 1.45 kg
5. **Hooded Diffuser 50 x 130 cm** — N° 26325
6. **Strip Diffuser 25 x 130 cm** — N° 26270
7. **Strip Diffuser 15 x 130 cm** — N° 26269

RECTANGULAR

Rotalux recta softboxes are useful for general purpose photography such as portraits and product photography. Because of their shape and size, they provide flexibility and of course, a rectangular catch-light.



1. **Rotalux 60 x 80 cm** — N° 26175
Depth: 30 cm — Weight: 1.30 kg
2. **Hooded Diffuser 60 x 80 cm** — N° 26318
3. **RotaGrid 60 x 80 cm** — N° 26110
4. **Rotalux 90 x 110 cm** — N° 26176
Depth: 42 cm — Weight: 1.55 kg
5. **Hooded Diffuser 90 x 110 cm** — N° 26319
6. **RotaGrid 90 x 110 cm** — N° 26111

OCTAGONAL

Rotalux octa softboxes are very popular amongst beauty and fashion photographers, as they prefer the round catchlight given. You can also create a great folding beauty dish just by removing the front and inner diffusers and adding one of the optional deflectors.



1. **Rotalux ø 100 cm** — N° 26183
Depth: 32 cm — Weight: 1.22 kg
2. **Hooded Diffuser ø 100 cm** — N° 26326
3. **Rotalux ø 135 cm** — N° 26184
Depth: 42 cm — Weight: 1.55 kg
4. **Hooded Diffuser ø 135 cm** — N° 26327
5. **Rotalux ø 175 cm** — N° 26186
Depth: 50 cm — Weight: 2.45 kg
6. **Hooded Diffuser ø 175 cm** — N° 26320

DEEP OCTAGONAL

Rotalux deep octa softboxes have become the most popular shape among Rotalux users. The narrow shaped Deep Octa reduces the spread of light and offers sharper shadows compared to standard sized octagonal softboxes. They provide a very even diffuse light over the front diffuser and are an excellent crispy and direct light when used without diffusers to give a beauty dish look.



1. **Rotalux ø 70 cm** — N° 26187
Depth: 40 cm — Weight: 0.80 kg
2. **Hooded Diffuser ø 70 cm** — N° 26770
3. **Rotalux ø 100 cm** — N° 26185
Depth: 65 cm — Weight: 1.50 kg
4. **Hooded Diffuser ø 100 cm** — N° 26328

PORTALITE

The Portalite softbox is an ultra compact softbox with great performance. Portalites are made out of the same quality material as Elinchrom uses for the Rotalux range.

The EL speed ring and rods are designed to give good stability and quick assembly. Portalite is a professional and competitively priced system.

The Portalite series is available in square sizes 40 x 40 cm and 66 x 66 cm. There is also a new 56 cm Octa design that works as a small beauty dish when used with the optional deflector set.



- Portalite 66 x 66 cm** — N° 26129
- Portalite 40 x 40 cm** — N° 26123
- Portalite Octa 56 cm** — N° 26152



SPOT ON AT ELINCHROM

Elinchrom Fresnel and Projection spots satisfy many professional needs for sophisticated directional lighting in portrait and commercial photography. High quality projection lenses allow precise and crisp illumination. Usable with any fan cooled Elinchrom head.



Zoom Spot 18°- 36°

N° 26481

The Zoom Spot has high quality lenses for control of image size and sharpness, complete with four integral masking blades. Various accessories can be fitted and to simplify maintenance, the lenses are easily accessible for cleaning.



Minispot - Accessory Type

N° 262420S

A hard-edged spot, supplied complete with gobo/filter holder and set of gobo, various shapes.



Zoom Spot Accessory Set

N° 26484

Gobo holder, 10 gobos, 2 front masks, filter holder, set of 10 assorted filters. The ultimate Zoom accessory Set.



Incl. listed accessories :

- Set of 5 gobos ø 52.5mm — N° 26418
- Filter holder — N° 26422
- Lens — N° 26423

FIBRE OPTIC KIT

The captor holds up to three cables, each one metre long and 10 mm in diameter for maximum light transmission. Correctly colour balanced, they are indispensable for most small object-photography whilst they dynamise larger subjects by highlighting or throwing long isolated shadows. Usable with any ventilated Elinchrom head.

FIBRE OPTIC KIT — N° 26430

Kit with two glass fibre cables.

| Qty | N° | Article |
|-----|-------|-----------------------------|
| 1x | 26433 | Fibre cable adapter |
| 2x | 50163 | Fibre duct 10 mm x 1 m |
| 2x | 26434 | Accessory/filter holder |
| 2x | 26435 | Focussing tube |
| 2x | 26436 | Lens hood |
| 1x | 26437 | Adapter f. duct extension |
| 1x | 26438 | Set of 10 filters |
| 1x | 31150 | Quick coupling device |
| 1x | 31153 | Metal base plate |
| 2x | 31161 | Articulated arm |
| 2x | 31162 | Fibre duct holder |
| 2x | 31163 | Mini holder for accessories |
| 1x | 33208 | Carrying case |



Invented in 1982, their unique patented construction and design have won these large lightweight softboxes worldwide popularity. A lightweight die cast rigid central mounting for the flash head inside the unit, places the flashtube at the point of focus. The optical result is a light source, which is so even at the diffuser surface, that many famous photographers use the Octa as a single light source for portrait photography. In the U.S.A. it is often referred to as "The Beauty Light". This exceptional softness of the light has sold many thousands of units, many adapted to other flash systems which do not have equivalent light sources. However, the Elinchrom Octa is designed to work best with Elinchrom flash units.

FEATURES

- Super fast to set up, with the unique EL folding construction.
- 360° rotating system.
- All indirect light banks are supplied with a carrying bag.
- Accepts all Elinchrom units, including the Ranger Quadra heads with the EL reflector adapter.



EL-Octa 190 cm

N° 26158

Includes diffuser and carrying bag. Does not include flash head and tripod.



EL-Strip
33 x 175 cm
N° 26160

Includes diffuser and carrying bag. Does not include flash head and tripod.



EL-Square 145 x 145 cm
N° 26156

Includes diffuser and carrying bag. Does not include flash head and tripod.



EL-Recta 72 x 175 cm
N° 26154

Includes diffuser and carrying bag. Does not include flash head and tripod.

ROTALUX DEEP INDIRECT

Based on the Rotalux softbox design, the Rotalux Deep Indirect softbox offers a superb crispy light and can be modified to a softer light by using the included diffusers. Just like other Rotalux softboxes, the unit folds down like an umbrella, is easily transportable and can be mounted as a direct softbox with the Rotalux ring which is also included.

FEATURES

- Diameter 150 cm / 73 cm depth (96 cm with tilt head and handle).
- 360° revolving system with lock.
- Delivered set up as an indirect.
- Includes additional EL adapter ring for conversion to direct lighting.
- Includes carrying bag for easy transportation and storage.
- Requires the EL-Tripod 31040 or heavier.
- Optional Hooded Diffuser is available.

Rotalux Deep Indirect 150 cm
N° 26188

Includes internal and external diffuser, Elinchrom Rotalux speedring, translucent deflector and carrying bag.

Hooded Diffuser (optional)
N° 26771

Limits the spread of light for more directional control.



Elinchrom offer a wide range of superbly designed reflectors, compatible with the entire Elinchrom studio flash system. Each reflector is specially designed to do a different job. Decide what you want your lighting to look like and there will be a reflector with precisely the right profile. Elinchrom reflectors are manufactured to the highest specification possible to ensure a long life with endless lighting possibilities!



Standard Reflector 21 cm 50°

N° 26141


The Standard Reflector combines high output with a good spread of light. The internal recess allows the fitment of high efficiency 21 cm grids.



Basic Grid Set 21

N° 26049

Reflector 21 cm 50° — N° 26141
20° Grid — N° 26053
30° Grid — N° 26052



Barndoor Set 21

N° 26037

Light shaper carrier — N° 26034
2x Barndoors 21x15 cm — N° 26009
2x Barndoors 26x16 cm — N° 26006



Grid Reflector Set 18 Complete

N° 26135


Reflector 18 cm 65° — N° 26144
30° Grid — N° 26100
20° Grid — N° 26101
12° Grid — N° 26102
Gel holder — N° 26132



Reflector Grid Set 21 Complete

N° 26051

Reflector 21 cm 50° — N° 26141
8° Grid — N° 26055
12° Grid — N° 26054
20° Grid — N° 26053
30° Grid — N° 26052



Barndoor Set Pro 21

N° 26039

Light shaper carrier — N° 26034
2x Recta Barndoors 21x15 cm — N° 26009
4x Trapezium Barndoors 21 x 15 cm — N° 26005
2x Recta Barndoors 26x16 cm — N° 26006



Background Reflector

N° 26165

Delivers an oval pool of evenly distributed light for background and still life. 360° rotation. 32 x 21 cm.



Snoot

N° 26061

A traditional accessory, designed to give an approx. 15° controlled spot of light, with a hard shadow effect. Includes one Snoot Grid.



Grid Reflector 18 cm 65°

N° 26144

A general purpose reflector for travelling. The internal recess allows the fitment of high efficiency 18 cm grids.



Wide Reflector 16 cm 90°

N° 26143

Gives a wide even coverage, excellent for copy work, single light source or large groups photography.



Snoot Grid Set 3

N° 26427

Grids of various honeycomb sizes deliver a sharply defined concentrated light source of exceptional quality. The grid is an easy retro fit, with clips to grip the interior of the snoot.

The Grid necessarily restricts ventilation of the Snoot. Please monitor heat level at all times. High wattage tungsten lamps or high power multi-flashing are liable to cause overheating.



High Performance Reflector
26 cm 48°

N° 26137

A bright, high performance reflector, ideal for general sports applications.



Maxi-Lite Reflector
40 cm 43°

N° 26147

Ideal for sunlight effects through windows; creates hard and brilliant highlights.



Maxi-Spot Reflector
40 cm 29°

N° 26149

Same shape as the Maxi Lite Reflector but produced with brilliant/glossy reflection material for very high efficiency, throwing light over even longer distances. A narrow powerful beam, which creates deep and sharp shadows.



Square Reflector Set 44 — N° 26048

This is a multifunctional reflector. Without Grid, it is a soft wide angle reflector. Put the Honeycomb Grid in place and you have a soft pool of light ideal for all types of portraiture and small still life subjects. Includes the Grid.

Square Reflector 44 cm — N° 26163
Square Reflector Grid 44 cm — N° 26057



Protective Cap

N° 27124

To protect modelling lamps and flashtubes for all heads and compacts.



Bayonet Reflector Support Set

N° 22061

This useful set of four bayonet adapter rings accepts all Elinchrom accessories. These can be safely stored mounted on a free studio wall.



Varistar Reflector
24 cm 90°

N° 26164

Wide coverage with central hotspot. Best use with Varistar umbrella.

SOFTLITE REFLECTORS

Beauty dishes, slightly harder lighting than a softbox and giving better definition of facial features, are perfect for close in beauty and portrait work. The included Deflector Set modifies the tone and softness. The light can be further softened with the optional showercap diffuser.

**Softlite White Reflector
70 cm 82°** — N° 26169
Incl. Deflector Set 26310.



Diffuser Tissue 70 cm
N° 26235



**Softlite White Reflector
44 cm 80°** — N° 26168
Incl. Deflector Set 26310.



**Softlite Silver Reflector
44 cm 55°** — N° 26166
Incl. Deflector Set 26310.



**Softlite Silver Reflector
70 cm 64°** — N° 26167
Incl. Deflector Set 26310.



Diffuser Tissue 44 cm
N° 26232



**Softlite White & Grid Set
44cm** — N° 26900

**Softlite Silver & Grid Set
44cm** — N° 26901

This high quality nylon bag allows safe storage, shipping and transportation for the Softlite 44 cm reflectors with an extra compartment for the Softlite Grid 44 cm. Built square to provide all the protection needed so that this reflector remains unscratched and undented while in transport. The all-in-one solution for beauty shots.

Softlite Grid 70 cm
N° 26023

Grids give the possibility to control precisely the direction and spread of light while offering sharper shadows.



Softlite Grid 44 cm
N° 26021

Grids give the possibility to control precisely the direction and spread of light while offering sharper shadows.



Barndoor 44x35cm
N° 26010

Further controls unwanted light spill. Works perfectly with the Softlite Grids 44 cm, 70 cm and Square Reflector 44 cm.



DEFLECTORS

Elinchrom is the only system with the central umbrella fitting which gives photographers the freedom to easily modify the hardness / softness of their lights. These deflectors can eliminate, soften or tone sharp shadow edges. Very efficient with Rotalux softboxes.



Translucent Deflector 14 cm

N° 26305

This deflector helps to smooth any hotspot.

Deflector Set

N° 26310

The Deflector Set includes one deflector of each: Silver, gold, translucent, frost and 2x Deflector Rods.



FILTERS

DIFFUSING FILTERS

Add extra softness. Diffusers are available in three sizes. Manufactured from spun glass material to provide resistance to heat.

Diffusing Filters 21 cm

N° 26249

Set of ten filters, to fit the 21 cm Accessory Holder 26034.



POLARIZING FILTERS

The rotating facility of the Accessory Holder means that Elinchrom flash can successfully be polarized to help control reflections and unwanted highlights. Polarizing filters absorb heat so modelling lamp power must be closely monitored.

Polarizing Filter 21cm — N° 26244

One filter to fit the 21 Accessory Holder 26034.

Colour Gels 21 cm — N° 26243

Colour Gels 21 cm: Set of 10 assorted gels in basic colours. They can be fitted in the 21 cm 26034 to bring vivid colour to any photography.

Colour Gels 21 cm — N° 26255

Set of 10 colour correction gels and diffusion filters.

Colour Gels 21 cm — N° 26256

Set of 20 assorted gels in a large panel of colours.

Note: green, blue and purple all absorb heat rapidly and may melt.

VARISTAR 85 & 105 CM

The multitasking umbrella for in and outside the studio! Easy to set up, lightweight and fits into most Elinchrom carrying bags. Ideal for industrial, portraits and groups, the Varistar is even in light distribution and powerful. The umbrella comes with a protective bag and the Varistar Set includes one 26164 Varistar Reflector 24 cm.

Varistar Umbrella 85 cm

N°26383

Incl. protection bag.

Varistar Umbrella 105 cm

N°26384

Incl. protection bag.

Varistar Set 85

N°26386

Includes: Varistar 85 cm, protection bag, and Varistar Reflector 24 cm.

Varistar Set 105

N°26385

Includes: Varistar 105 cm, protection bag and Varistar Reflector 24 cm.



UMBRELLAS

With Elinchrom's unique central shaft, Elinchrom umbrellas offer the most symmetrical light distribution. All EL-umbrellas are made with non-fluorescent material.

ECO UMBRELLAS

ECO Umbrella Silver 85 cm

N°26350



ECO Umbrella Translucent 85 cm

N°26351



ECO Umbrella Set

N°26062

Includes 1x 26351, 1x 26350



PROFESSIONAL UMBRELLAS

**Pro Umbrella
White 85 cm**
N°26372



**Pro Umbrella
Silver 105 cm**
N°26361



**Umbrella
Translucent 105 cm**
N°26374



**Pro Umbrella
White 105 cm**
N°26375



EL-Daylight Blue 105 cm — N°26380
Converts Tungsten-Halogen Light 3200°
into Daylight 5500° Kelvin



EL-Boom Arm 63 – 156 cm

N° 31049

The EL Boom Arm with double hand grips, extends up to 156 cm. This is a comfortable way to hold lighting gear over the subject to provide an overhead light. The profiled extension tube avoids heads rotating around even when used with a softbox. The two sections of the EL-Boom Arm can be quickly adjusted with the clip-locks.

- Min. size: two sections, 63 cm
- Max. extension 156 cm
- Weight: 0.44 kg
- Rubberised handgrip
- Profiled aluminium tubes
- Standard spigot for EL-Flash heads and the Ranger Quadra heads.




Polystand

N° 31045

With the Polystand's unique sliding column and adjustable boom, a head or accessory can be placed up to 335 cm high or as low as 5 cm from floor level. Folds flat for travelling.

- Folded min. size: two sections, 150 cm
- Max. height: 335 cm
- Weight: 5.5 kg
- Max load: 8 kg/Boom 3kg
- Dimensions: 150 x 33 x 21 cm
- Boom: 154 cm

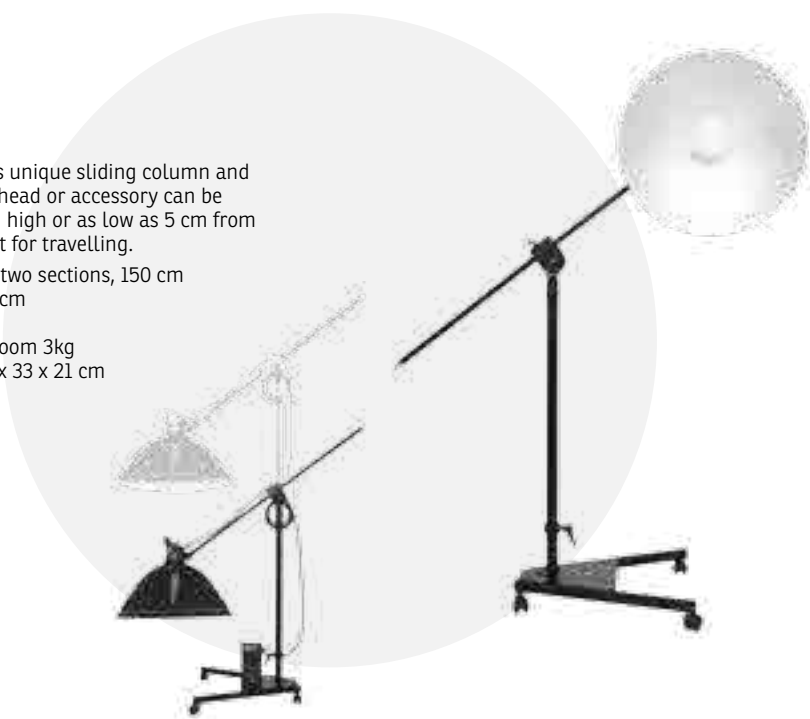

EL-TRIPØDS SPECIFICATIONS

| | Polystand | EL Tripod Air 105 - 264 cm | EL Tripod 88-235cm | EL Tripod 52-190cm | EL-Boom Arm 63-156cm | EL Tripod Air HD 121-396 cm |
|-------------------------|---------------|----------------------------|--------------------|--------------------|----------------------|-----------------------------|
| Code | 31045 | 31041 | 30101 | 31048 | 31049 | 31040 |
| Folded size min. | 150 cm | 105 cm | 88 cm | 52 cm | 63 cm | 121 |
| Extention max. | 335 cm | 265 cm | 235 cm | 190 cm | 156 cm | 396 |
| Extras | - | Air Cushioned | - | - | - | Air Cushioned |
| Boom | 154 cm | - | - | - | 156 cm | - |
| Load max. | 8 kg/Boom 3kg | 6.5 kg | 4.5 kg | 1.8 kg | 2 kg | 13.5 kg |
| Diameter | 33 x 21 cm | 9.5 cm | 8 cm | 7.5 cm | 3 cm | 12 cm |
| Weight | 5.5 kg | 2.09 kg | 1.72 kg | 1.19 kg | 0.44 kg | 2.7 kg |

Tripod 88 – 235 cm

N° 30101

The EL stand/sets are dedicated to Elinchrom flash sets and can be ordered separately. Two or three head sets are available.

ww

Tripod Set 2

N° 30162

2x Tripod 88–235 cm — N° 30101
1x EL-Carrying bag — N° 33230



Tripod Set 3

N° 30161

3x Tripod 88–235 cm — N° 30101,
1x EL-Carrying bag — N° 33220



Tripod 52–190 cm

N° 31048

The new compact, aluminium lightweight stand is designed for small heads, e.g. the Quadra heads. Weighing only 1.19 kg and 52 cm folded size, this stand is ultra transportable. The EL-Stand Set includes one carrying bag with shoulder strap and two stands. The perfect add on for our Quadra Sets.

Tripod Set 52-190 cm

N° 31050

2x Tripods 52 - 190 cm 31048
1x EL-Carrying bag



Tripod Air 105-264 cm

N° 31041

Air cushioned tripods prevent sudden collapse.

Tripod Air Set 105-264 cm

N° 31052

2x Tripod 105-264 cm — N° 31041
1x EL-Carrying bag — N° 33222



Tripod Air HD 121-396

N° 31040

This new air cushioned black aluminium tripod is designed to carry, larger light banks and compact heads up to a height of 396 cm.

EL-CARRYING BAGS



- For tripods & umbrellas 68 cm — N° 33218
- For 3x tripods & umbrellas up to 87 cm — N° 33220
- For 2x tripods up to 87 cm — N° 33230
- For 3x tripods & umbrellas up to 110 cm — N° 33222
- For Indirect Lights; Octa, Square, Recta & Strip — N° 33221
- For Rotalux 26178, 26180, 26183, 26175 — N° 33226
- For Rotalux 26179, 26181, 26184, 26176 — N° 33227
- For Rotalux 26186 — N° 33228
- For Rotalux 26188 — N° 33229



Tripod - Umbrella Set To Go

N° 20564

2x Tripod 88–235 cm — N° 30101,
1x Umbrella translucent 85 cm — N° 26351,
1x Umbrella silver 85 cm — N° 26350,
1x EL-Carrying bag — N° 33220

TRANSPORT

ProTec Bag Poly

N° 33196


The smart new ProTec Bag is designed to safely transport or store up to two Elinchrom compact flash units, up to two complete Quadra systems, or a combination of head and accessories.



ProTec Bag Softlite 44

N° 33231

This bag allows safe storage, shipping and transportation of Softlite 44cm reflectors or the Square reflector 44cm with an extra compartment for the Softlite Grid 44 cm.

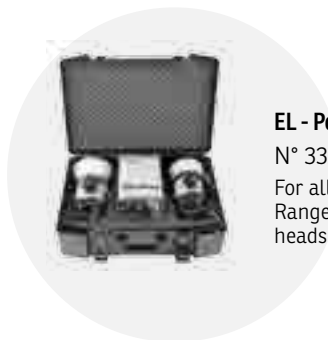

EL - Power Pack Case

N° 33215S

For all Digital RX packs, all Ranger RX models and 1-2 flash heads.



EL-Skyport Hard Shell Case

N° 33000

Elegant hard shell case to protect and carry any Skyport module.

EL-Tube Bag D-Lite RX One — N° 33194

Carries and protects up to three D-Lite RX One

EL-Tube Bag D-Lite RX — N° 33198

Carries and protects two D-Lite RX 2 / 4

EL-Tube Bag BRX — N° 33199

Carries and protects two BRX 250 / 500



EL Notebook-Table — N° 22901

This table supports 13", 15" and 17" laptops and is a useful studio accessory for digital imaging. The base is made of metal and includes a tilt-head which fits any standard tripod with 16 mm spigot. To ensure the best possible stability, the Tripod Air 31041, or heavier is recommended.

Dimensions: width: 50 cm, depth: 28 cm

Weight including tilt-head 1.5 kg

Supports laptops up to 40 cm x 27 cm / 3.5 kg





EL-Sync Cord 5m — N° 11088

Camera pc > 3.5 mm jack
EL units with 3.5 mm sync plug: Style, Style S, Style RX, FX, BX, Chic 1/2, Digital 1/2, Digital RX 1200/2400, D-Lite, BXRI and BRX.



EL-Sync Extension Cord 10m

N° 11080
EL-Amphenol female > male
To extend following sync cords: 11075, 11074, 11089, 11081, 11083, 11072.



Sync Cord Transmitter 20 cm

N° 11120
Camera pc > 2.5 jack
This cable connects the EL-Skyport Transmitter or the Prolinca IR-Transmitter with the camera PC socket.



EL-Sync Cord 5m — N° 11075

Camera pc > EL-Amphenol
Elinchrom standard sync cord for all self-contained (compact) flash units and power packs. Except Style FX, BX, D-Lite, BXRI, BRX and ELC Pro HD.



Sync Adapter 6.35 - 3.5 J — N° 11125

Sync Adapter 6.35 - 3.5 j. This device converts 6.35 sync plugs to 3.5 mm standard sync sockets. The Sync Adapter is part of the EL-Skyport Universal Set 19360.



Sync Adapter 3.5-PC — N° 11126

The Sync Adapter 3.5 mm - PC (female) connects the EL-Skyport Universal Speed Receiver with any other PC (male) sync plug.



EL-Spiral Sync Cord 5m — N° 11074

Camera pc > EL-Amphenol
Gold plated contacts to increase the connectivity, with a flexible spiral section, for all EL compacts and power packs. Except Style FX, BX, D-Lite, BXRI, BRX and ELC Pro HD.



EL-Sync Adapter 6.35 phone jack 10 cm

N° 11083
EL Amphenol > 6.35 phone jack female
To connect sync cords with 6.35 phone jack. Except Style FX, BX, D-Lite, BXRI, BRX and ELC Pro HD.



EL-FRC Sync Cable-Receiver 50 cm

N° 11072
EL-Amphenol male > 2.5 jack
This cable connects the FRC Receiver 19316 with the EL flash unit. Except Style FX, BX, D-Lite, BXRI, BRX and ELC Pro HD.



EL-Sync Hardwire Cord 5 m — N° 11089

3.5 mm jack > EL-Amphenol
To hardwire units in case the photocell has a bad reception due to long distance between flash units. For all self-contained (compact) flash units and power packs. Except Style FX, BX, D-Lite, BXRI, BRX and ELC Pro HD.



POWER SPECIFI- CATIONS





STARTERS

ADVANCED

| | D-LITE RX ONE | D-LITE RX 2 | D-LITE RX 4 |
|--|---|---|------------------|
| Energy (Ws/l) | 100 | 200 | 400 |
| F-Stop (1m, 100 ISO, reflector 48°) | 32.4 | 45.3 | 64.3 |
| Power range f-stop | 5 | 5 | |
| Power range Ws | 6 - 100 | 12 - 200 | 25 - 400 |
| Power range display | 1/1 - 1/16 | 1/1 - 1/16 | |
| Power range | 0.1 - 4 | 1 - 5 | 2 - 6 |
| Power increments in f-stop | 1/10 to programmable 5/10 - 1/1 | 1/10 to programmable 5/10 - 1/1 | |
| Flash duration t0.5 at max. power in s. | 1/2200 | 1/1200 | 1/800 |
| Best flash duration at power | - | - | - |
| Recycling 230 V in s. | 0.44 - 1.5 | 0.2 - 0.6 | 0.35 - 1.2 |
| Recycling 115 V in s. | 0.45 - 2.1 | 0.2 - 0.8 | 0.35 - 1.6 |
| Max. flash per sec. at min. power | - | - | - |
| Colour temperature in °K at max. power | 5500 | 5500 | |
| Auto Power Dumping | Adjusts power settings automatically | Adjusts power settings automatically | |
| Power stability | ± 0.5% | ± 0.5% | |
| Voltage | Multivoltage 90 - 260 V | Multivoltage 90 - 260 V | |
| Modelling lamp mode | Proportional, min, max, off | Proportional, min, max, off | |
| Modelling lamp 230 V | E27 100 W / 196 V (effective 150 W) - 23002 | E27 100 W / 196 V (effective 150 W) - 23002 | |
| Modelling lamp 115 V | E27 100 W / 90 V (effective 150 W) - 23006 | E27 100 W / 90 V (effective 150 W) - 23006 | |
| Flashtube | n° 24009: Plug-in, user replaceable | n° 24009: Plug-in, user replaceable | |
| EL-Skyport (Built-in) | Integrated transceiver, 8 Frequency Channels and 4 Groups with full RX features | Integrated transceiver, 8 Frequency Channels and 4 Groups with full RX features | |
| Sync voltage | 5 V (compatible with all cameras) | 5 V (compatible with all cameras) | |
| Sync socket | 3.5 mm Jack | 3.5 mm Jack | |
| Fan Cooled | Microprocessor controlled fan with thermal cut-out | Microprocessor controlled fan with thermal cut-out | |
| Umbrella fitting | Centred tube for EL-umbrellas ø 7 mm. Stand bracket with extra umbrella fitting for larger umbrella shafts | Centred tube for EL-umbrellas ø 7 mm. Stand bracket with extra umbrella fitting for larger umbrella shafts | |
| Glass dome frosted, optional | - | - | |
| Max. power consumption (230 V / 50 Hz) | 140 W | 150 W (during charge: 370 W) | |
| Max. power consumption (115 V / 60 Hz) | 170 W | 180 W (during charge: 280 W) | |
| Pure sine battery converter DC/AC: slow charge (W) | - | - | |
| Dimensions (with protective cap) | 19 x 14 x 19 cm | 26 x 14 x 19 cm | |
| Weight | 0.9 kg | 1.3 kg (2.8 lb.) | 1.5 kg (3.3 lb.) |
| Supplied with | Mains cable, sync cable, flashtube, modelling lamp and protective cap | Mains cable, sync cable, flashtube, modelling lamp and protective cap | |
| N° | 20485.1 | 20486.1 | 20487.1 |

ENTRY PROFESSIONAL

PROFESSIONAL

| | BRX 250 | BRX 500 | ELC PRO HD 500 | ELC PRO HD 1000 |
|--|---|------------------------------|---|--|
| | 250 | 500 | 500 | 1000 |
| | 45.8 | 64.8 | 64.8 | 90.8 |
| | 5 | | 7 | 8 |
| | 16 - 250 | 31 - 500 | 8 - 500 | 8 - 1000 |
| | 1/1 - 1/16 | | 1/1 - 1/64 | 1/1 - 1/128 |
| | 1.3 - 5.3 | 2.3 - 6.3 | 0.3 - 6.3 | 0.3 - 7.3 |
| | 1/10 to programmable 5/10 - 1/1 | | Adjusted by precise multifunctional power knob in 1/10 steps | |
| | 1/2762 | 1/1558 | Min. power: 1/2940 Max. power: 1/2330 | Min. power: 1/2780 Max. power: 1/1430 |
| | | | 3.1 (1/5000) | 3.6 (1/5260) |
| | 0.29 - 0.73 | 0.36 - 1.13 | Slow: 2.0 Default: 0.75 Fast: 0.6 | Slow: 4.0 Default: 1.5 Fast: 1.2 |
| | 0.27 - 1.02 | 0.34 - 1.45 | Slow: 2.5 Default: 0.9 Fast: 0.7 | Slow: 5.0 Default: 1.8 Fast: 1.4 |
| | - | - | 20 | |
| | 5500 | | 5500 | |
| | Adjusts power settings automatically | | Adjusts power settings automatically | |
| | ± 0.5% | | ± 0.1% | |
| | Multivoltage 90 - 260 V | | Multi-voltage 90 - 265 V | |
| | On, proportional, off, free | | Off, free, proportional | |
| | E27 100 W / 196 V (effective 150 W) - 23002 | | 300 W / GX 6.35 - 23022 | |
| | E27 100 W / 90 V (effective 150 W) - 23006 | | 300 W / GX 6.35 - 23030 | |
| | n° 24000: Plug-in, user replaceable | | S-Type, Omega Plug-in, user replaceable - 24084 | |
| | Integrated transceiver, 8 Frequency Channels and 4 Groups with full RX features | | Integrated transceiver, 20 Frequency Channels and 4 Groups with full RX features | |
| | 5 V (compatible with all cameras) | | 5 V (compatible with all cameras) | |
| | 3.5 mm Jack | | 3.5 mm Jack | |
| | Microprocessor controlled fan with thermal cut-out | | Electronically intelligent temperature controlled fan | |
| | Centred tube for EL-umbrellas ø 7 mm. Stand bracket with extra umbrella fitting for larger umbrella shafts | | Centred tube for EL-umbrellas ø 7 mm. Stand bracket with extra umbrella fitting for larger umbrella shafts | |
| | - | | Art. Nr. 24917 / optional | |
| | 150 W (during charge: 380 W) | 150 W (during charge: 490 W) | Slow: 350 W // Default: 700 W // Fast: 875 W | |
| | 180 W (during charge: 270 W) | 180 W (during charge: 380 W) | Slow: 250 W // Default: 500 W // Fast: 625 W | |
| | - | | 600 with Halogen | 600 with Halogen |
| | 28 x 14 x 23 cm | | 31.5 x 14 x 21 cm | |
| | 1.85 kg (4.0 lb.) | 2.05 kg (4.5 lb.) | 2.35 kg (5.2 lb.) | 2.9 kg (6.4 lb.) |
| | Mains cable, sync cable, flashtube, modelling lamp and protective cap | | Mains cable, sync cable, flashtube, modelling lamp, glass dome, protective cap and reflector 16 cm 90° | |
| | 20440.1 | 20441.1 | 20613.1 | 20616.1 |

DIGITAL RX

| | DIGITAL RX 1200 | DIGITAL RX 2400 |
|--|---|------------------------------|
| Energy (Ws/J) | 1200 | 2400 |
| Power distribution | Symmetrical | |
| F-Stop (1m, 100 ISO, reflector 48°) | 128 | 180 |
| Power range f-stop | 6 | |
| Power range Ws | 37 – 1200 | 75 - 2400 |
| Power range | 1/1 - 1/32 | |
| Power increments in f-stop | 1/10 | |
| Flash duration t0.5 with Zoom Pro / Pro HD at max. power in s. | 1/1500 | 1/830 |
| Flash duration t0.5 with Zoom Action at max. power in s. | 1/2800 | 1/1410 |
| Recycling 230 V FAST / SLOW in s. | 0.24 – 1.0 / 0.35 – 1.9 | 0.4 – 1.9 / 0.55 – 3.6 |
| Recycling 115 V FAST / SLOW in s. | 0.6 – 1.7 / 0.6 – 2.2 | 0.6 – 3.8 / 0.8 – 5 |
| Colour temperature in °K at max. power | 5500 | |
| Auto Power Dumping | Adjusts power settings automatically | |
| Power stability | ± 0.5% | |
| Modelling lamp mode | On, proportional, off, free | |
| EL-Skyport | External Transceiver RX required for full RX features | |
| Sync voltage | 5 V (compatible with all cameras) | |
| Sync socket | 3.5 mm Jack and EL-Amphenol | |
| Fan Cooled | All models | |
| Max. power consumption (230 V / 50 Hz) | 30 W (during charge: 1100 W) | 30 W (during charge: 1320 W) |
| Max. power consumption (115 V / 60 Hz) | 30 W (during charge: 780 W) | 30 W (during charge: 940 W) |
| Dimensions | 22 x 13 x 23 cm | 22 x 13 x 32 cm |
| Weight | 4.6 kg (10.1 lb.) | 6.6 kg (14.5 lb.) |
| Supplied with | Mains cable and Sync Cord | |
| 230 V 50 – 60 Hz N° | 10256.1s | 10258.1s |
| 115 V 50 – 60 Hz N° | 10255.1s | 10257.1s |

DIGITAL RX – RINGFLASH

| | RINGFLASH 3000 |
|---|---|
| Flash capacity (J/J) | Up to 3000 |
| F-Stop (2m, 100 ISO) | 22.5 (Digital RX 1200) |
| Compatible power packs | All Elinchrom power packs since 1981 |
| Flash duration at max. power t0.5 | 1/2600 (Digital RX 1200) |
| Flash duration at min. power t0.5 | 1/1920 (Digital RX 1200) |
| Colour temperature in °K at max. power | 5500 |
| Flashtube | 4 pole - Action |
| Inner diameter | 10 cm |
| Outer diameter | 20 cm |
| Cable length | 5 m |
| Camera / Tripod adapter | 1/4" // 1/4" and 3/8" |
| Matt glass diffuser, optional | 402.013 |
| UV coated protection glass filter, spare part | 402.012 |
| Dimensions | 23 x 20 x 32 cm |
| Weight, including cable | 1.9 kg (4.1 lb.) |
| Supplied with | UV coated protection glass filter and flash cable |
| N° | 20494 |

DIGITAL RX – ZOOM HEADS

| | ZOOM PRO HD | ZOOM ACTION | ZOOM PRO |
|--|--|---|--|
| Flash capacity (Ws/J) | Up to 4000 | Up to 3000 | |
| Compatible power packs | All Elinchrom power packs since 1981 | | |
| Flash duration t0.5 on Digital RX 1200 | 1/1500 | 1/2800 | 1/1500 |
| Flash duration t0.5 on Digital RX 2400 | 1/830 | 1/1410 | 1/830 |
| Colour temperature in °K at max. power | 5500 | | |
| Multivoltage | All Zoom Heads can be used with either 115 V or 230 V EL power packs. Only the Halogen and the fuse must apply to the correct voltages and values! | | |
| Modelling lamp on/off | All models | | |
| Modelling Lamp 230 V | Standard configuration : 300 W / 230 V Halogen GX 6.35 // 23022 | | |
| Modelling Lamp 115 V | Standard configuration : 300 W / 115 V Halogen GX 6.35 // 23030 | | |
| Flashtube | n° 24082 : Plug-in, user replaceable Quartz – Heavy Duty | n° 24083 : Plug-in, user replaceable Super short flash duration | n° 24081 : Plug-in, user replaceable Quartz - Standard |
| Fan cooled | Electronically intelligent temperature controlled fan. At high internal temperature the modelling switches off. After cooling down the modelling lamp switches back on automatically | | |
| Umbrella fitting | Centred tube for EL-umbrellas ø 7 mm. Stand bracket with extra umbrella fitting for larger umbrella shafts | | |
| Tripod adapter | Standard 5/8" | | |
| Glass Dome Frosted, optional | 24919 | | |
| Dimensions (with protective cap) | 24.5 x 15.5 x 20.5 cm | | |
| Weight | 2.3 kg (5.0 lb.) | 2.33 kg (5.1 lb.) | 2.3 kg (5.0 lb.) |
| Supplied with | 5 m Flash Cable, Glass Dome transparent, Halogen Lamp and Plug-in Flashtube | | |
| N° | 20192 | 20193 | 20191 |

SCANLITE

| | 650 W | | 300 W | |
|--|--|----------------------------------|-------|----------------------------------|
| Voltage | 230 V | 120 V | 230 V | 120 V |
| Aperture 2m / 100 ISO / 1/30 s 48° Zoom Pos. 0 | 11 | 8.0 ⁷ / ₁₀ | 8.0 | 5.6 ⁷ / ₁₀ |
| Lux | 12500 | 9500 | 8500 | 5500 |
| Lumen | 20000 | 20000 | 9600 | 8100 |
| Colour temperature in °K | 3200 | | | |
| Multivoltage | Scanlite Heads can be used with either 110 V or 230 V. Only the Halogen and the fuse must apply to the correct voltages and values! | | | |
| Controls | Modelling lamp on/off and Zoom function | | | |
| Modelling Lamp 230 V | Standard configuration : 300 W / 230 V Halogen GX 6.35 // 23022 | | | |
| Modelling Lamp 115 V | Standard configuration : 300 W / 110 V Halogen GX 6.35 // 23030 | | | |
| Fan cooled | Electronically intelligent temperature controlled fan. At high internal temperature the modelling switches off. After cooling down the modelling lamp switches back on automatically | | | |
| Umbrella fitting | Centered tube for EL-umbrellas ø 7 mm. Stand bracket with extra umbrella fitting for larger umbrella shafts | | | |
| Tripod adapter | Standard 5/8" | | | |
| Glass Dome Frosted, optional | 24919 | | | |
| Dimensions (with protective cap) | 24.5 x 15.5 x 20.5 cm | | | |
| Weight | 1.2 kg (2.6 lb.) | | | |
| Supplied with | Mains cable, Glass Dome transparent and Halogen Lamp 300 W / 650 W | | | |
| N° | 20998 | | | |

RANGER RX

| | RANGER RX SPEED AS |
|---|--|
| Flash capacity (Ws/J) | 1100 |
| Power distribution | Asymmetrical, 2:1 ratio |
| F-Stop (2m, 100 ISO, reflector 48°) | At 100%: 64 — At 66%: 45 — At 33%: 32 |
| Power range f-stop | 8.5 |
| Power range Ws | 100%: 17 – 1100 66%: Output A: 11.5 – 733 33%: Output B: 5.7 - 366 |
| Power range | 1/1 - 1/64 |
| Power increments in f-stop | 1/10 |
| Flash duration t0.5 max. power: 1 / 2 A heads | Output A: 1/2300 / 1/4310 — Output B: 1/5120 |
| Flash duration t0.5 max. power: 1 / 2 S heads | Output A: 1/1250 / 1/2250 — Output B: 1/2310 |
| Recycling, FAST, in s. | Output A: 0.3 – 3.0 — Output B: 0.19 – 1.2 |
| Recycling, SLOW, in s. | Output A: 0.45 – 5.5 — Output B: 0.22 – 1.9 |
| Colour temperature in °K at max. power | 5500 |
| Auto Power Dumping | Adjusts power settings automatically |
| Power stability | ± 0.5% |
| Modelling lamp mode | On, 15 s., 30 s., off |
| Flashes out of one charged battery at min. power, SLOW / FAST recycle | 5100 / 3700 |
| Flashes out of one charged battery at max. power, SLOW / FAST recycle | 250 / 195 |
| Battery (Lead-Gel) | 12 V / 12 Ah |
| Quick charger: approx. recharge time | 3 h |
| EL-Skyport | External Transceiver RX and 19374 adapter required for full RX features |
| Sync voltage | 5 V (compatible with all cameras) |
| Sync socket | EL-Amphenol |
| Dimensions | 19 x 14 x 28 cm |
| Weight | 8 kg (17.6 lb.) |
| Supplied with | 19280 + 11075 + 19289 + 19283 + 19374 |
| N° Ranger pack with included parts | 10267.1s |

RANGER RX – RINGFLASH

| | RANGER RINGFLASH 1500 |
|---|--|
| Flash capacity (Ws/J) | Up to 1100 |
| F-Stop (2m, 100 ISO) | 22.5 (Ranger RX series) |
| Compatible power packs | Ranger RX series and Ranger Quadra series with Adapter cable 11036 |
| Flash duration at max. power t0.5 | 1/2600 (Ranger RX series) |
| Flash duration at min. power t0.5 | 1/1920 (Ranger RX series) |
| Colour temperature in °K at max. power | 5500 |
| Flashtube | 4 pole - Action |
| Inner diameter | 10 cm |
| Outer diameter | 20 cm |
| Cable length | 2 m |
| Camera / Tripod adapter | 1/4" // 1/4" and 3/8" |
| Matt glass diffuser, optional | 402.013 |
| UV coated protection glass filter, spare part | 402.012 |
| Dimensions | 23 x 20 x 32 cm |
| Weight, including cable | 1.8 kg (3.9 lb.) |
| Supplied with | UV coated protection glass filter and flash cable |
| N° | 20493 |

RANGER RX – HEADS

| | RANGER S | RANGER A |
|---|---|--|
| Flash capacity (Ws/J) | Up to 1100 | |
| Compatible power packs | Ranger RX series and Ranger Quadra series with Adapter cable 11036 | |
| Flash duration t0.5 1 head at max. power | 1/1160 1/2310 on output B of Ranger RX Speed AS | 1/2300 1/5120 on output B of Ranger RX Speed AS |
| Flash duration t0.5 2 heads at max. power | 1/2250 | 1/4310 |
| Colour temperature in °K at max. power | 5500 | |
| Modelling light on / off | All models | |
| Modelling lamp | 50 W 12 V | |
| Flashtube N° | 24034: Standard | 24053: Action |
| Umbrella fitting | Centred tube for EL-umbrellas ø 7 mm. Stand bracket with extra umbrella fitting for larger umbrella shafts | |
| Tripod adapter | Standard 5/8" | |
| Dimensions (with protective cap) | 24 x 14 x 21 cm | |
| Weight, including cable | 2.4 kg (5.2 lb.) | |
| Supplied with | Flash cable, flashtube, modelling lamp and protective cap | |
| N° | 20100 | 20101 |

RANGER QUADRA HYBRID – FLASH HEADS

| | QUADRA HYBRID S | QUADRA HYBRID A |
|--|--|--|
| Flash capacity (Ws/J) | Up to 400 | |
| Compatible battery packs | Ranger Quadra series only | |
| Flash duration t0.5 1 head at max. power | Output A (100%): 1/1200 Output B (33%): 1/3000 Output A+B (100%): 1/1500 | Output A (100%): 1/2800 Output B (33%): 1/5700 Output A+B (100%): 1/4000 |
| Colour temperature in °K at max. power | 5500 | |
| Modelling lamp | LED 20 W (approx. 50 W Halogen) | |
| Flashtube N° | 24009: Standard | 24000: Action |
| Umbrella fitting | Centred tube for EL-umbrellas ø 7 mm. | |
| Tripod adapter | Standard 5/8" | |
| Dimensions (with Multifunction Cap) | 9 x 8 x 11 cm | |
| Weight (Head + 2.5 m cable) | 0,25 kg + 0,4 kg | |
| Supplied with | 2.5 m flash cable, flashtube Reflector 13.5 cm and Multifunction Cap | |
| N° | 20139 | 20134 |

RANGER QUADRA HYBRID

| | RANGER QUADRA HYBRID LITHIUM-ION | RANGER QUADRA HYBRID LEAD-GEL |
|---|--|---|
| Energy (Ws/J) | 400 | |
| Power distribution | Asymmetrical, 2:1 ratio | |
| F-Stop (1m, 100 ISO, reflector 48°) | At 100% : 64.5 | |
| Power range f-stop | 6,6 | |
| Power range Ws | 100% : 25 - 400 66% : Output A: 17 - 268 33% : Output B: 8.2 - 132 | |
| Power range | 1/1 – 1/32 | |
| Power increments in f-stop | 1/10 to programmable 5/10 - 1/1 | |
| Flash duration t0.5 at max. power in s. : RQ S / A head | Output A (100%) : 1/1200 / 1/2800 Output B (33%) : 1/3000 / 1/5700 Output A+B (100%) : 1/1500 / 1/4000 | |
| Recycling, FAST in s. | Output A: 0.36 - 2.0 Output B: 0.17 - 0.73 | Output A: 0.41 - 2.26 Output B: 0.18 - 0.8 |
| Recycling, SLOW in s. | Output A: 0.86 - 6.6 Output B: 0.33 - 2.3 | Output A: 0.95 - 7.8 Output B: 0.37 - 2.7 |
| Colour temperature in °K at max. power | 5500 | |
| Auto Power Dumping | Adjusts power settings automatically | |
| Power stability | ± 0.5% | |
| Modelling lamp mode | On, off, programmable timer and continuous | |
| Flashes out of one charged battery at min. power, SLOW / FAST recycle | 4800 / 4200 | 2000 / 1500 |
| Flashes out of one charged battery at max. power, SLOW / FAST recycle | 320 / 280 | 140 / 110 |
| Battery | Lithium-Ion 16.8 V / 3.3 Ah | Lead-Gel 12 V / 3.6 Ah |
| Quick charger: approx. recharge time | 1 h 30 min | 2h min |
| EL-Skyport (Built-in) | Integrated transceiver, 8 Frequency Channels and 4 Groups with full RX features | |
| Sync voltage | 5 V (compatible with all cameras) | |
| Sync socket | 3.5 mm Jack | |
| Dimensions: Ranger Quadra battery pack including battery | 15 x 8.5 x 18.5 cm | 15 x 8.5 x 21 cm |
| Weight: Quadra Hybrid unit including battery | 2 kg | 3 kg |
| Supplied with | Battery box, Charger, Sync cord and Shoulder Strap | |
| Quadra Hybrid N° | 10268.1 | 10266.1 |
| Spare Quadra Battery Box N° | 19295 | 19294 |

RANGER QUADRA HYBRID – RINGFLASH

| | RINGFLASH PRO | RINGFLASH ECO |
|---|--|--|
| Flash capacity (Ws/J) | 400 | |
| F-Stop (2m, 100 ISO) | 16.0 | 11.8 (-0.5 with white diffuser) |
| Compatible power packs | Ranger Quadra series only | |
| Flash duration at max. power t0.5 | Output A: 1/1950 Output B: 1/4500 | Output A: 1/1000 Output B: 1/2500 |
| Flash duration at min. power t0.5 | Output A: 1/1400 Output B: 1/2700 | Output A: 1/600 Output B: 1/1400 |
| Colour temperature in °K at max. power | 5500 | |
| Flashtube | 4 pole - Action | 2 pole - Standard |
| Inner diameter | 10 cm | 9.5 cm |
| Outer diameter | 20 cm | |
| Cable length | 2 m | |
| Camera / Tripod adapter | 1/4" // 1/4" and 3/8" | |
| Matt glass diffuser, optional | Optional, 402.013 | Included white Plexiglas diffuser |
| UV coated protection glass filter, spare part | 402.012 | – |
| Dimensions | 23 x 20 x 32 cm | 21 x 20 x 21 cm |
| Weight, including cable | 1.5 kg (3.3 lb.) | 1 kg (2.2 lb.) |
| Supplied with | UV coated protection glass filter and 2m flash cable | UV coated plastic protection filter, white Plexiglas diffuser and detachable 2 m flash cable |
| N° | 20495 | 20492 |

MODELLING LAMPS 230 V

| Code | Power | Lumen | Av. Life | Type | Socket | To use with |
|-------|-------|-------|----------|---------|---------|---|
| 23002 | 100 W | 1580 | 1000 | Krypton | E27 | D-Lite One RX, D-Lite 2 RX, D-Lite 4 RX, BRX 250, BRX 500, Style 100 FX, Style 400 FX |
| 23002 | 138 W | 2100 | 1000 | Krypton | E27 | D-Lite One RX, D-Lite 2 RX, D-Lite 4 RX, BRX 250, BRX 500, Style 100 FX, Style 400 FX |
| 23005 | 650 W | 20000 | 15 | Halogen | GX 6.35 | SCANLITE HALOGEN, X6000, Spot Lite 3000 |
| 23018 | 205 W | 4200 | 2000 | Halogen | E27 | Style 300 RX, Style 600 RX, Mini S |
| 23022 | 300 W | 7900 | 75 | Halogen | GX 6.35 | Style 1200 RX, ELC 500 PRO, ELC 1000 PRO, ZOOM PRO, ZOOM PRO HD, ZOOM ACTION, TWIN X4, SCANLITE HALOGEN |
| 23029 | 625 W | 16900 | 300 | Halogen | R7S | Digital RE |
| 23034 | 200 W | 5100 | - | Halogen | GX 6.35 | Style 600 RX |
| 23035 | 150 W | 2870 | 2000 | Halogen | E27 | Style 100/400 BX |

MODELLING LAMPS 120 V

| Code | Power | Lumen | Av. Life | Type | Socket | To use with |
|-------|-------|-------|----------|---------|---------|--|
| 23006 | 100 W | 1400 | 1000 | Krypton | E27 | D-Lite RX, BRX |
| 23006 | 178 W | 2400 | 1000 | Krypton | E27 | D-Lite RX, BRX |
| 23019 | 150 W | 2500 | 2000 | Halogen | E27 | Style 300 RX, Style 600 RX, Style 1200 RX |
| 23027 | 650 W | 20000 | 15 | Halogen | GX 6.35 | X6000 |
| 23030 | 300 W | 8100 | 75 | Halogen | GX 6.35 | ELC 500 PRO, ELC 1000 PRO, ZOOM PRO, ZOOM PRO HD, ZOOM ACTION, TWIN X4, SCANLITE HALOGEN |
| 23037 | 150 W | 2400 | - | Halogen | BA15D | Style 300 RX, Style 600 RX |
| 23038 | 250 W | 5000 | - | Halogen | BA15D | Style 1200 RX |
| 23035 | 150 W | 2870 | 2000 | Halogen | E27 | Style 100/400 BX |

BATTERY FLASH SYSTEM



Quadra Power Kit
Quadra 1000 ES
Quadra 2000 ES
Quadra 3000 ES



Emergen RX
Emergen RX 2000 ES

POWER PACK SYSTEM



Digital RX 2000
Digital RX 3000

CONTINUOUS LIGHT



SCANITE range
Scan-Dome Translucent Light Panel

UNIVERSAL RECEIVERS



ES-Universal Receiver

STANDS & ACCESSORIES



Lightstand 1000
Lightstand 2000
Lightstand 3000
Lightstand 4000
Lightstand 5000
Lightstand 6000
Lightstand 7000
Lightstand 8000
Lightstand 9000
Lightstand 10000

POWER PACK HEADS




Power Pack Head 1000
Power Pack Head 2000
Power Pack Head 3000
Power Pack Head 4000

SPECIAL LIGHT EFFECT



Snoot 1000
Snoot 2000
Snoot 3000
Snoot 4000
Snoot 5000
Snoot 6000
Snoot 7000
Snoot 8000
Snoot 9000
Snoot 10000

UMBRELLAS

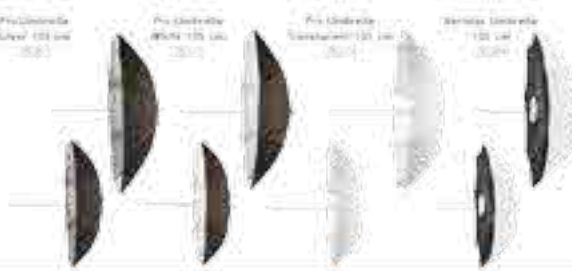

Pro-Umbrella 100cm
Pro-Umbrella 120cm
Pro-Umbrella 150cm
Studio Umbrella 100cm
Studio Umbrella 120cm
Studio Umbrella 150cm

STANDS & ACCESSORIES



Stand Feet 1000
Stand Feet 2000
Stand Feet 3000
Stand Feet 4000
Stand Feet 5000
Stand Feet 6000
Stand Feet 7000
Stand Feet 8000
Stand Feet 9000
Stand Feet 10000

PORTALITE



Portalite 1000
Portalite 2000
Portalite 3000
Portalite 4000
Portalite 5000
Portalite 6000
Portalite 7000
Portalite 8000
Portalite 9000
Portalite 10000

ROTALUX INDIRECT



Rotalux Indirect 100cm
Rotalux Indirect 120cm
Rotalux Indirect 150cm

ACCESSORIES



ES - Powerpack Case
ES - Case Set 1000
ES - Case Set 2000
ES - Case Set 3000
ES - Case Set 4000
ES - Case Set 5000
ES - Case Set 6000
ES - Case Set 7000
ES - Case Set 8000
ES - Case Set 9000
ES - Case Set 10000



elinchrom[®]