

PURA FRESCO

C 2M 1P H CE W


Franke Coffee Systems Americas

800 Aviation Parkway
Smyrna, TN USA 37167
Tel: 1 800 310 5710
Fax: 1 615 793 5940
email: fs-coffeesales.us@franke.com
www.us.franke-cs.com

1" minimum clearance
on sides and rear of
machine

10" of clearance
recommended
above grinder
(5" minimum)

Scale drawing for
counter drill hole

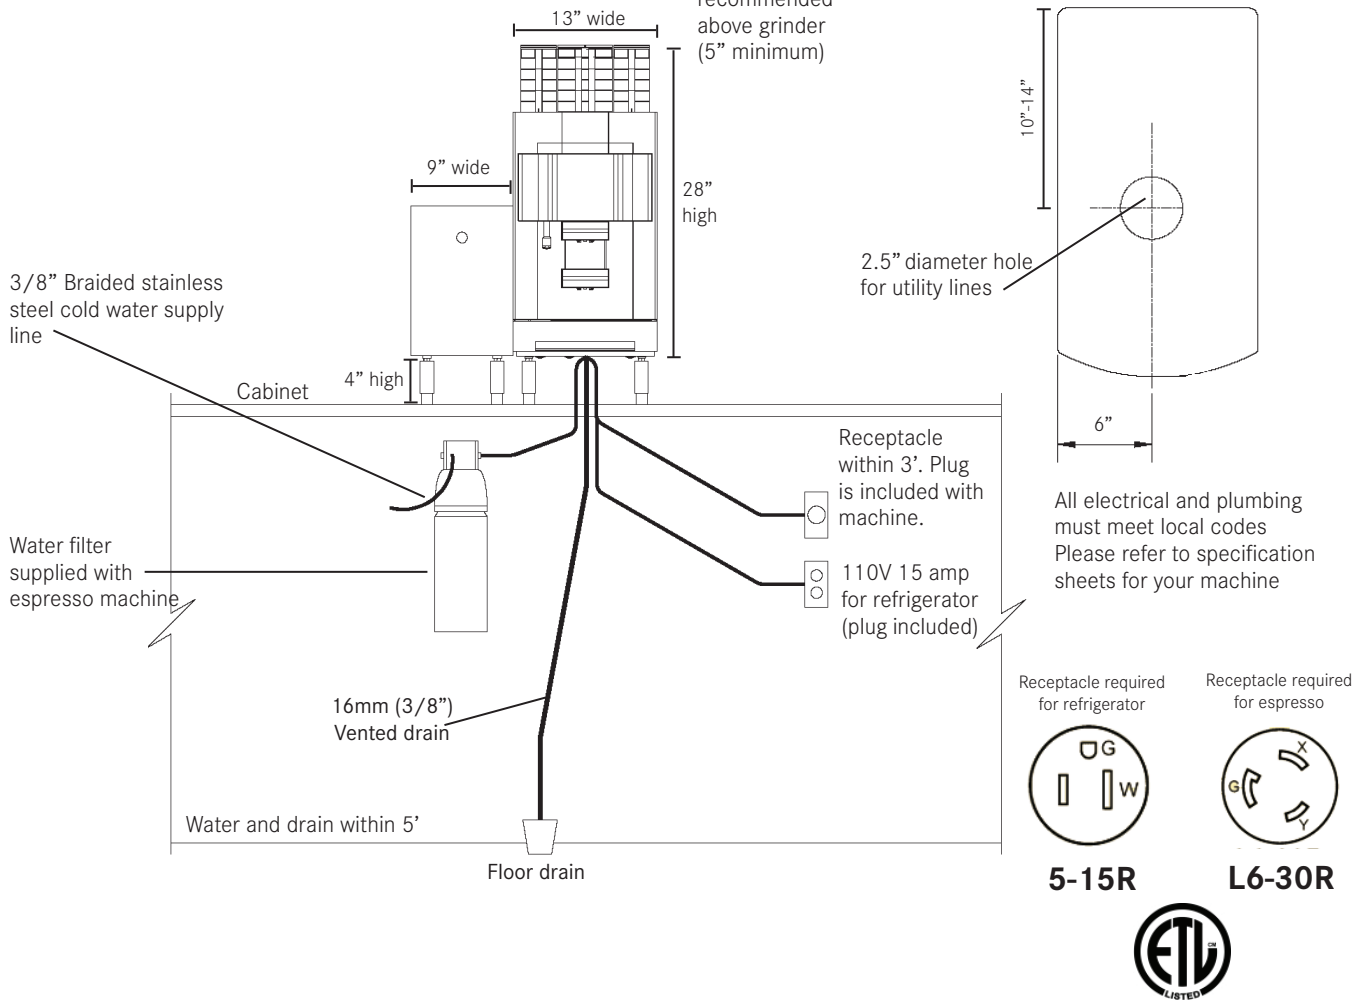

Unit	Height	Width	Depth	Ship weight	Voltage/Phase/Cycle	Wattage	Amp Load	Amp Circuit	Plug	Water line	Water hardness	Drain
Espresso	28" 690mm	13" 320mm	24" 590mm	66lbs 30kg	208-240/1/60	4400	22 A	30 A	NEMA L6-30P	G 3/8"	1-5 gpg	16mm ID vented
Refrigerator	13" 330mm	9" 225mm	18" 453mm	29lbs 14kg	110 /1/60	75	1.5 A	15 A	NEMA 5-15P	n/a	n/a	n/a

COFFEE
SYSTEMS



© 2012 - Franke Coffee Systems Americas - This document is the confidential and proprietary property of Franke Coffee Systems Americas, and shall not be reproduced in any form of media without the expressed written permission of a Franke Coffee Systems Americas representative. Due to continuous product development, Franke Coffee Systems Americas reserves the right to make changes in design and specifications without prior notice. REV.09Feb2012 • G800005600FCGPuraFrescoInstalguide_new.ridd • Under license of Franke Technology and Trademark, Ltd. Switzerland. Printed in U.S.A.