

**TEMCO**  
BY MAJESTIC


Tribute  
Direct Vent Gas Fireplaces



A tribute to value  
and great looks  
Tribute by Temco.

**The Perfect Addition to Any Room**

A great value, the Temco Tribute is the new builder direct vent gas fireplace that features authentic wood-like logs and a realistic flame pattern. A spacious viewing area and a modest footprint make this dependable unit easy to install, operate and service. Available in dedicated rear or top vent formats.

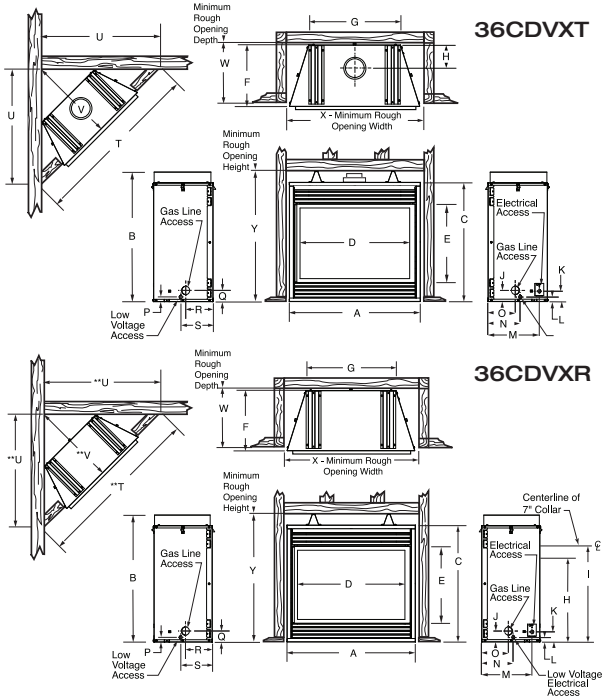

	36CDVXT	36CDVXR
A	35 1/4" (895 mm)	A 35 1/4" (895 mm)
B	34 3/4" (883 mm)	B 34 3/4" (883 mm)
C	32 1/8" (816 mm)	C 32 1/8" (816 mm)
D	33" (838 mm)	D 33" (838 mm)
E	21 1/8" (537 mm)	E 21 1/8" (537 mm)
F	16 5/8" (422 mm)	F 16 5/8" (422 mm)
G	25" (635 mm)	G 25" (635 mm)
H	8" (203 mm)	H 18 1/2" (470 mm)
J	3 1/4" (83 mm)	I* 22" (559 mm)
K	2 7/8" (73 mm)	J 3 1/4" (83 mm)
L	1 3/8" (35 mm)	K 2 7/8" (73 mm)
M	14" (356 mm)	L 1 3/8" (35 mm)
N	8 1/2" (216 mm)	M 14" (356 mm)
O	7 3/8" (187 mm)	N 8 1/2" (216 mm)
P	1 3/8" (35 mm)	O 7 3/8" (187 mm)
Q	3 1/4" (83 mm)	P 1 3/8" (35 mm)
R	7 3/8" (187 mm)	Q 3 1/4" (83 mm)
S	8 1/2" (216 mm)	R 7 3/8" (187 mm)
		S 8 1/2" (216 mm)
<b>Framing Dimensions</b>		* 29 1/2" for corner installation
T	58 3/8" (1483 mm)	<b>Framing Dimensions</b> If using Rigid 45' with Starter Pipe
U	41 3/8" (1051 mm)	T** 68 1/4" (1734 mm)
V	29 1/8" (740 mm)	U** 48 1/4" (1226 mm)
W	17 1/8" (435 mm)	V** 34 1/8" (867 mm)
X	36 1/4" (921 mm)	W 17 1/8" (435 mm)
Y	35" (889 mm)	X 36 1/4" (921 mm)
		Y 35" (889 mm)
		**Must be adhered to if using 7TCD45KT Flex Vent Kit.

**Features and Benefits**

**Features**

- Direct Vent Gas Fireplace
- Clean viewing area
- Flat louvers
- Standard 36" size
- New black embossed refractory comes as standard
- Gas inlet flex line with shut-off valve
- Includes electrical receptacle
- Attached 17" low voltage wire connected to valve for remote operation hook-up
- 2 piece log set shipped in place
- Pilot location in bottom back of firebox - allows better flame stability
- Alumined steel tube burner
- Natural gas model can be converted to propane in field
- Heat Input: BTU Max: 21,000  
BTU Min: 15,750
- Weight: 92 lbs

**Efficiencies**


- AFUE by D.O.E Rating: 63% NG/LP
- Steady State Rating (with fan on): 76.5% NG, 78% LP
- EnerGuide Ratings RFN/RFP Fireplace Efficiency: 66.9% NG/LP

**Benefits**

- Requires no chase or chimney
- Can be vented vertically 50 ft. or horizontally 20 ft. with Temco Builder DV pipe
- Great value for any home
- Offers unobstructed flame viewing area
- Clean design
- Fits small to mid size rooms
- Safe viewing of fire
- Cuts installation time on site
- Comfortable heat, not overbearing

**Options**

- Fan system FK12
- Satin Black perimeter trim 36CDVTK to finish off your framing needs
- Vent Kits available: 7TCRVT horizontal vent for 7"-13" horizontal length and 7TCRVT1320 horizontal vent kit for 13"-20" horizontal length

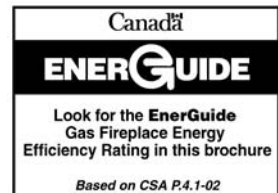

ph: 1.800.525.1898

www.vermontcastings.com  
www.majesticproducts.com

YOUR DEALER