

Replacement Parts List

NOTE: If requested color is not available, similar color will be substituted.

Part	Cost	Quantity	Total Cost
Seat Pad	\$49.99	X _____ = \$ _____	
Cup Holder	\$14.99	X _____ = \$ _____	
Instructions	\$0.00	X _____ = \$ _____	

Merchandise Total \$ _____

Shipping and handling: \$ _____

Up to \$25.00	\$5.95	\$100.01 to \$150.00	\$10.95
\$25.01 to \$50.00	\$6.95	\$150.01 to \$200.00	\$11.95
\$50.01 to \$75.00	\$8.95	\$200.01 and up	\$13.95
\$75.01 to \$100.00	\$9.95	Outside Continental USA	\$10.00

Sales Tax \$ _____
 (Indiana, California, Arkansas, and Massachusetts residents add applicable sales tax.)

Grand Total \$ _____

No shipping and handling on instruction manuals on quantities 6 or less. Add \$.50 for each instruction manual over 6, then add applicable shipping and handling.

Fill Out For Credit Card
 Visa Mastercard

Card Exp. Date: _____

Cardholder's Name: _____

Card Number: _____

Signature _____

rodi™ xr

CUT ON DOTTED LINE

MAXI-COSI®



the secure world of Maxi-Cosi™


4358-4583

rodi™ xr

This child restraint is designed for use by children whose:

Weight:
 30-100 pounds
 (13.6-45.4 kg)

Height:
 34-57 inches
 (85.1-144.8 cm)

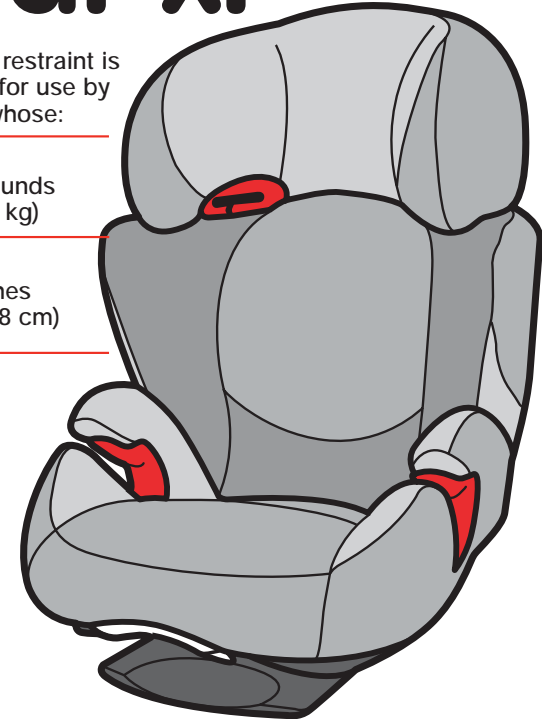


Read all instructions **BEFORE USING** this child restraint.

KEEP INSTRUCTIONS FOR FUTURE USE.

▲ IMPORTANT!

Failure to follow the warnings on the labels and in the instruction manual can result in the death or serious injury of your child.

Para recibir las instrucciones en español, llame al 1-800-951-4113 o solicítase por escrito al dirección por arriba.



Thank you for choosing this car seat, referred to throughout this manual as a child restraint. The Maxi-Cosi® Brand is part of the Dorel Juvenile Group (DJG) family that is committed to creating a child restraint with the most comfort and convenience available today.

Remember, parents are a child's first teachers and examples. If you always buckle your seat belt, your child will think it is the natural thing to do. Make it a firm rule that the vehicle does not go until everyone is buckled up. Make no exceptions.

No one can predict if use of a child restraint will prevent injury or death in a particular crash. However, combined with careful driving, proper use of a child restraint can lower a child's risk of injury or death in most crashes.

Your child's safety is worth the time it will take to read and follow these instructions. After reading, if you still have questions or have any problems with this child restraint, please contact our Consumer Relations Department at:

Dorel Juvenile Group, Inc.	
Website:	www.maxi-cosi.com
Fax:	1-800-207-8182
Mailing Address:	Dorel Juvenile Group, Inc. P.O. Box 2609 Columbus, IN 47202-2609
Telephone:	1-800-951-4113 7 A.M. to 6 P.M. EST M-TH 7 A.M. to 4:30 P.M. EST FRI

Dorel Juvenile Group does not recommend using this child restraint after 6 years from the date of manufacturer. The date of manufacturing label is on the bottom of the seat base.

Table of Contents

- General and Warm Weather Use2
- Registration and Recall2
- Aircraft Installation2
- Warnings3
- Understanding Your Vehicle4
- Child Restraint Features5-6
- Preparing Child Restraint7
- Headrest Adjustment8
- Reclining the Child Restraint and Adjusting the Shoulder Support9
- Installing the Cup Holder10
- Knowing Your Vehicle Belts11
- Belt-Positioning Booster Use12
- Belt-Positioning Booster Installation With Seat Back13-14
- Belt-Positioning Booster Installation Without Seat Back15-16
- Removing Seat Pad for Cleaning17-20
- Warranty21
- Replacement Parts Order Form22-23

General and Warm Weather Use

To help protect your vehicle seat's upholstery from damage, use a seat protector or a towel underneath and behind child restraint.

To avoid your child being seriously burned, take the following precautions:

1. Park in the shade or where sun does not directly hit the child restraint.
2. Cover the child restraint with a sheet or blanket when not in use.
3. Check for hot seat and buckles before placing child in child restraint.

Registration and Recall Information

Child restraints could be recalled for safety reasons. You must register this restraint to be reached in a recall. Send your name, address and the restraint's model number and manufacturing date to:



Dorel Juvenile Group, Inc.
P.O. Box 2609, Columbus, IN 47202-2609
Attn: Consumer Relations or visit www.maxi-cosi.com
or call 1-800-951-4113.

You can now register your child restraint online at www.maxi-cosi.com. Please do not send in your registration card if you registered your child restraint online

For recall information, call the U.S. Government's Vehicle Safety Hotline at 1-888-327-4236 (TTY: 1-800-424-9153), or go to <http://www.NHTSA.gov>.

Aircraft Installation

This restraint is not certified for aircraft use. Do not use this belt-positioning booster because aircraft seats do not have shoulder belts.




⚠ WARNING

Failure to follow these warnings can result in the serious injury or death of your child. To help you recognize those instructions which are most critical for your child's safety, we use this symbol ⚠:



- ⚠ According to accident statistics, children are safer when properly restrained in the rear seating positions than in the front seating positions.
- ⚠ Never place a child less than one-year old forward-facing.
- ⚠ Check vehicle instructions for more information about air bag/child restraint use.
- ⚠ Never take your child out of the child restraint or try to tend to your child's needs while the vehicle is moving. Never leave child unattended.
- ⚠ Do not use a child restraint with damaged or missing parts.
- ⚠ Do not substitute parts or try to modify the child restraint in any way.
- ⚠ Do not use a child restraint that has been in a crash. You must get a new child restraint.
- ⚠ Use the child restraint only on vehicle seats that face forward. Do not use on seats that face the sides or rear of the vehicle.
- ⚠ Check the vehicle belt before each use. Use only if the belt can be tightened properly and securely.
- ⚠ This child restraint should be securely belted in the vehicle even when not in use. In a crash or sudden stop, an unsecured child restraint could injure other occupants.
- ⚠ Never allow any child to play with this child restraint; it is not a toy.
- ⚠ Do not use this child restraint if the midpoint of your child's head is above the top of the vehicle seat back or vehicle headrest.
- ⚠ Dorel Juvenile Group does not recommend the use of any child restraint accessories except those provided by DJG.
- ⚠ Placing your child in a hot child restraint may result in burns.
- ⚠ Do not remove any of the warning labels or other labels on the child restraint.
- ⚠ Do not use this child restraint without the seat pad.
- ⚠ Read instructions for other warnings.

Your vehicle's features may be considerably different than those pictured here. Consult your vehicle owner's manual to help identify your vehicle's specific features.

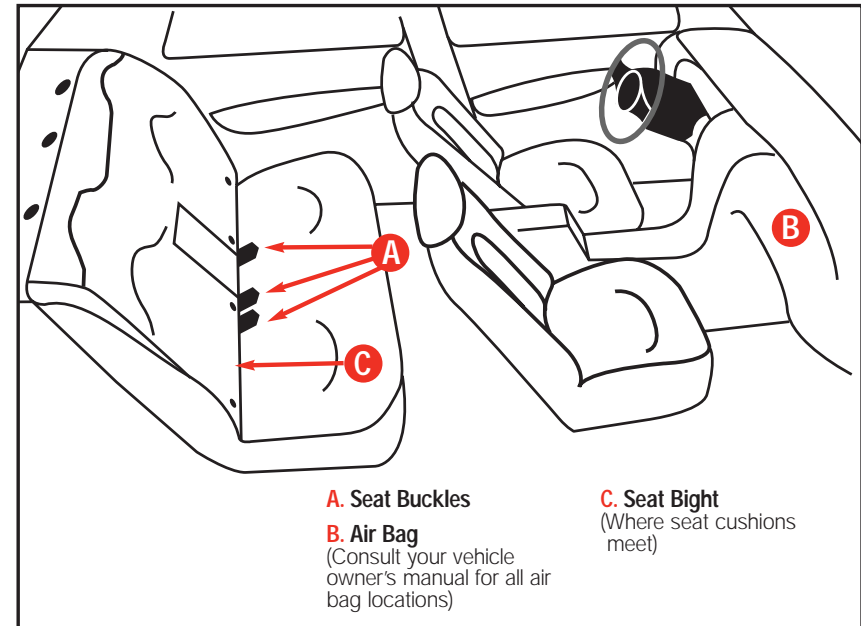


rodi™ xr

rodi™ xr

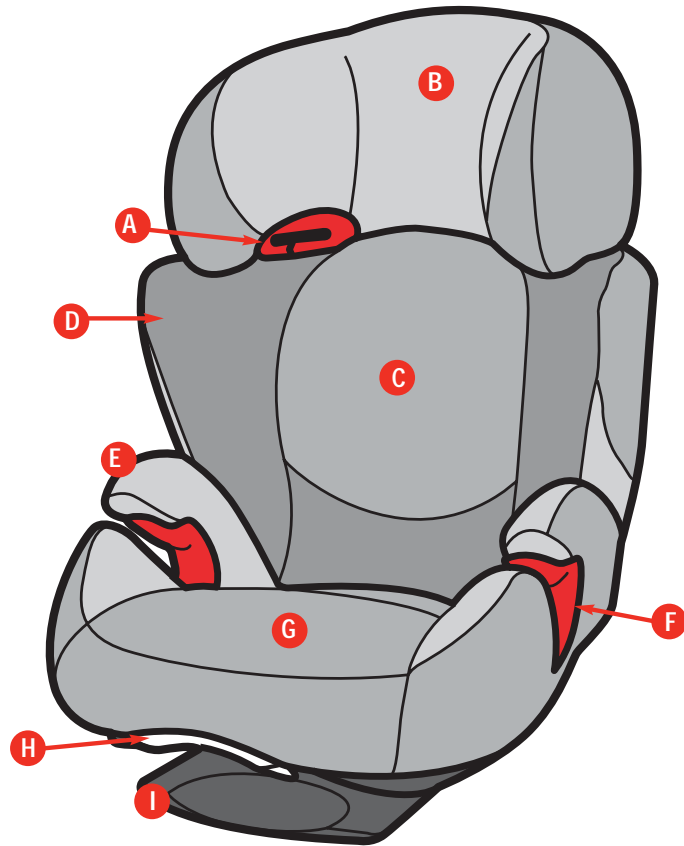


- A. Shoulder Belt Guides
- B. Headrest
- C. Backrest
- D. Adjustable Shoulder Support
- E. Armrests
- F. Lap Belt Guides
- G. Seat Base
- H. Recline Adjustment Handle
- I. Recline Foot



rodi™ xr

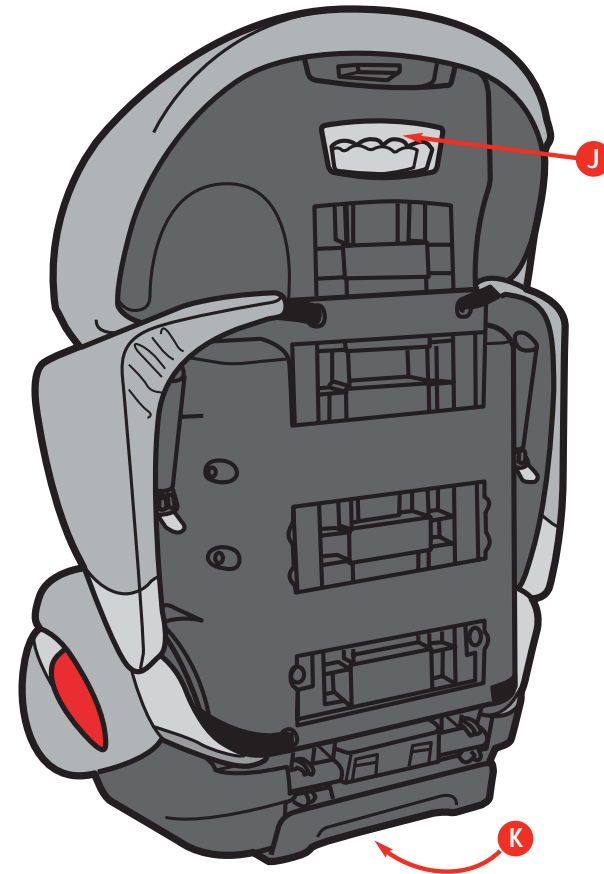

- J. Headrest Adjustment Handle
- K. Instruction Storage (under seat base)

rodi™ xr




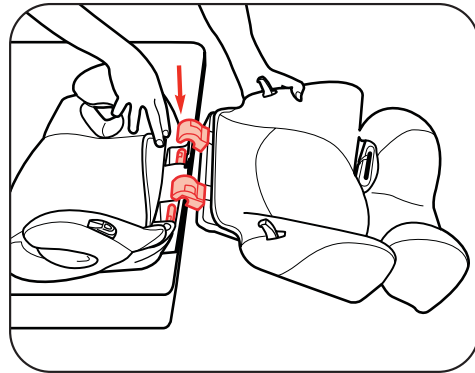

1 Attach Backrest to Seat Base


Place seat base close to an edge of a table. Pull back the flap cover to expose the backrest connection holes.

Align the backrest hooks with the holes on the base. The backrest will need to be below the seat base. Rotate the backrest down and insert the hooks into the seat base. Make sure the cover does not get caught between the moving parts.

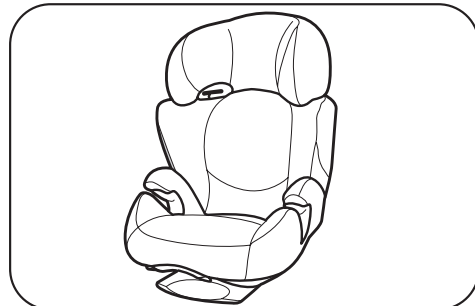


2 Raise Backrest

Rotate the backrest up until it locks into place.

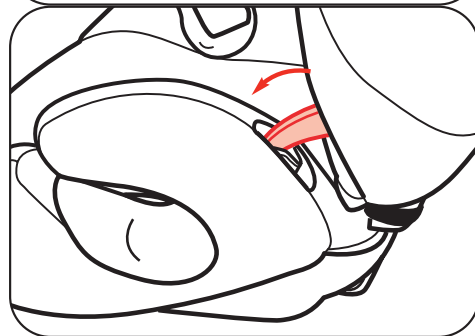


NOTE: The hooks on the side of the backrest lock into the arms of the seat base.

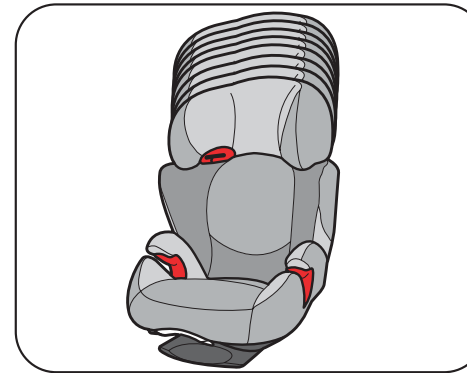

1 To Adjust the Headrest


This child restraint has 8 headrest positions.

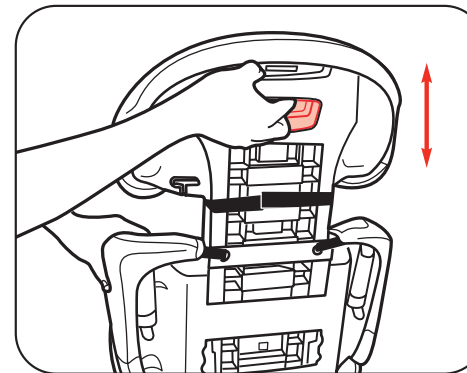


2 To Raise or Lower Headrest

Squeeze the headrest adjustment handle to raise or lower the headrest to the desired position. Release the headrest adjustment handle.


Pull up and down on the headrest to make sure it is locked.






9 Reclining the Child Restraint and Adjusting the Shoulder Support

Installing the Cup Holder

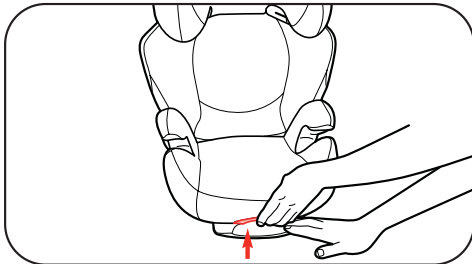


1 To Recline

To recline the child restraint, with one hand, hold the recline foot while lifting up the recline handle with the other hand.

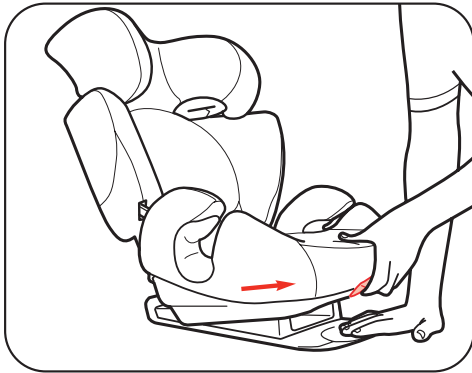

Pull the seat base toward you until the seat is reclined. Push down on the seat base to lock it in the recline position.


Reverse the steps to position the child restraint upright.

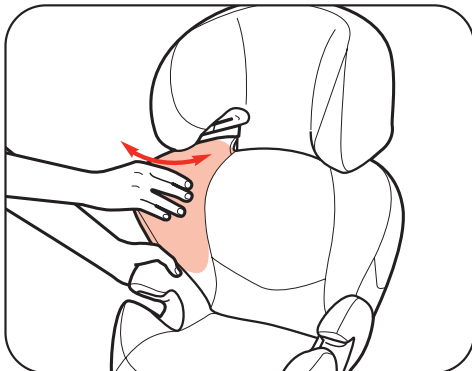

1 To Adjust the Shoulder Support

The shoulder supports can be adjusted into 2 different positions, depending on the size of your child.

Grab hold of the shoulder supports and push or pull them from side to side to fit your child.

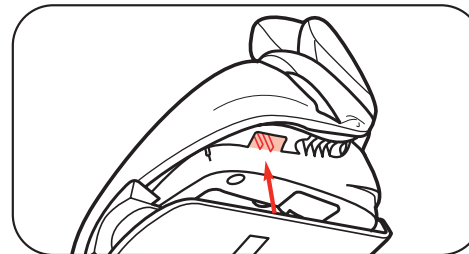



1 Install Cup Holder

The cup holder can be placed on either side.

Locate the cup holder hole on the bottom side of the seat base.


Insert the cup holder handle inside the cup holder hole. Push up until it is locked into place.


To remove, push down on the cup holder handle and remove.

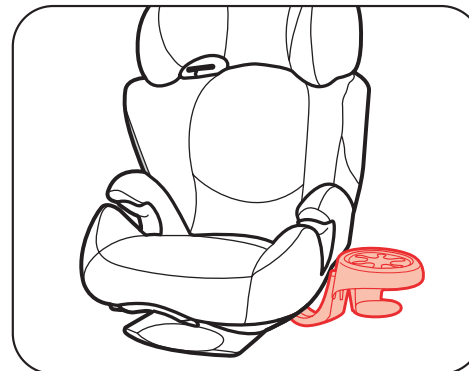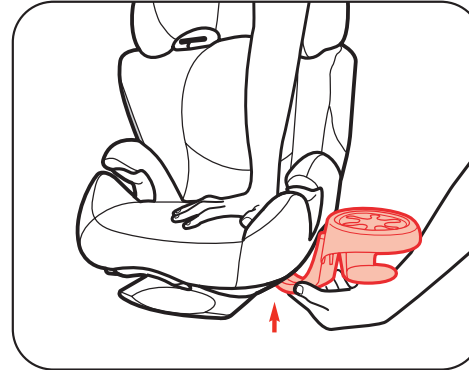

rodi™ xr



rodi™ xr





This belt-positioning booster must only be used in vehicles with appropriate vehicle belts that can be tightened securely. **If the vehicle belt cannot be tightened securely, it must be replaced. This booster MUST only be used with a lap/shoulder belt.** Belt systems which will not work with this child auto booster (or sometimes any child restraint) include, but are not limited to, the following:


- **Do not use with any automatic/passive vehicle seat belt.** An automatic (passive) 2-point belt has no lap belt. You must install a lap belt to secure a car seat. You may also need to install an extra lap belt for an automatic (passive) 3-point belt. Refer to the vehicle owner's manual.
- **If your vehicle belt is too short,** contact your vehicle dealer for a seat belt extender. Do not route the seat belt any way except as shown in the instructions.
- **You must move the auto booster to another seating location if the belts come out of the center of the door or side panel (A); or if the buckle is in the middle of the vehicle seat cushion (so that they are forward of the bight) (B).**

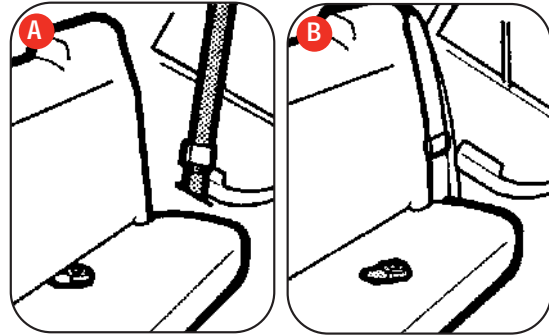

Booster with Backrest

**30-100 lbs (13.6-45.4 kg)
34-57 in. (85.1-144.8 cm)
and Over 1 Year Old.**



Vehicle lap/shoulder belt combination.
Child and child restraint face the front of the vehicle and are placed in the back seat.

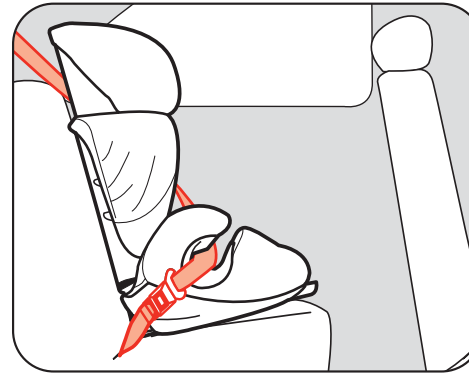

Booster without Backrest



**40-100 lbs (18.1-45.4 kg)
43-57 in. (110.1-144.8 cm)
and Over 1 Year Old.**


Vehicle lap/shoulder belt combination.
Child and child restraint face the front of the vehicle and are placed in the back seat.

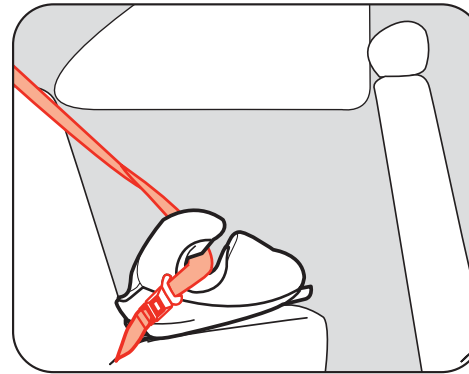

Know Your Vehicle Belts


Some vehicle belts will not work with a child restraint. See previous page for specific instructions.

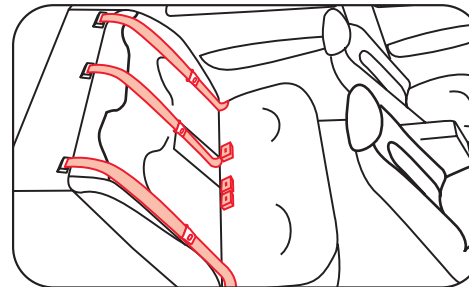



1 Place Child in the Child Restraint


Place child restraint against the back of the vehicle seat. Place the child's bottom and back flat against the child restraint.

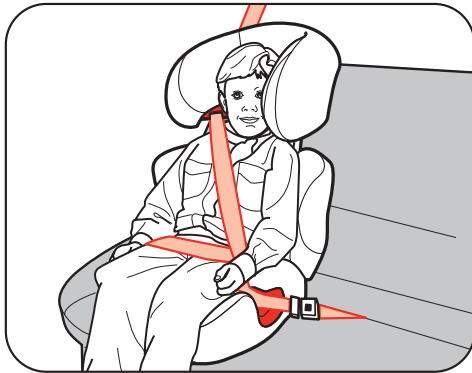

2 Buckle Child

Place lap belt across child's thighs. Lock buckle.

NOTE: Make sure the lap and shoulder belt are placed under armrests as shown.

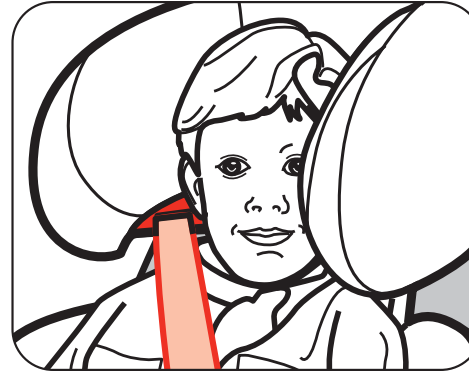


3 Secure Shoulder Belt

Secure the shoulder belt through the notch in the headrest. The belt should cross the base of the child's neck and across the chest (not the face or neck). Adjust headrest as needed (see "Headrest Adjustment" section). Pull up on the shoulder belt to tighten belt snugly.

NOTE: A snug belt should not allow any slack. It lies in a relatively straight line without sagging. It does not press on the child's flesh or push the child's body into an unnatural position.

Check periodically to ensure your child has not moved out of position and loosened the shoulder belt.

WARNING



Do not use this child restraint if the midpoint of your child's head is above the top of the vehicle seat back or vehicle headrest.

WARNING

Check vehicle instructions for more information about air bag/child restraint use.

Do Not Use only the lap belt when using this seat.

The shoulder belt must always be adjusted snugly across the child's chest.

Use only the vehicle's lap and shoulder belt system when restraining the child in this booster seat.


NEVER place the shoulder belt under the child's arms.



Failure to follow these warnings could cause serious injury or death to your child.



rodi™ xr


rodi™ xr



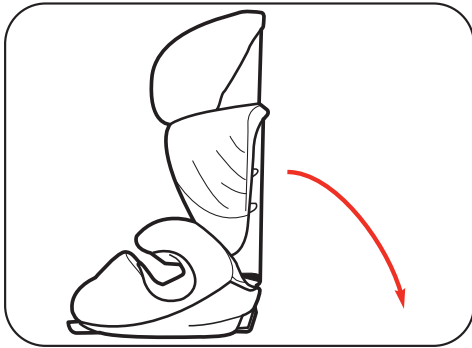

1 Lower Backrest

Place seat base close to an edge of a table. Rotate the backrest down.

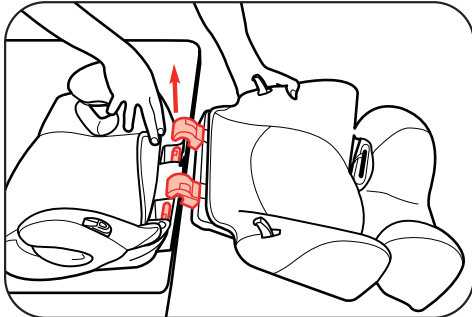

2 Remove Backrest


Lift the backrest off the seat base.

NOTE: Backrest needs to rotate below the seat base.



1 Place Child in the Child Restraint

Place child restraint against the back of the vehicle seat. Place the child's bottom flat against the child restraint and their back against vehicle seat.

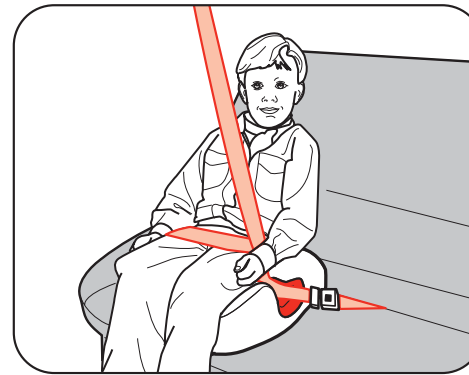

2 Buckle Child

Place lap belt across child's thighs. Lock buckle. The shoulder belt should cross the base of the child's neck and across the chest (not the face or neck). Pull up on the shoulder belt to tighten belt snugly.

NOTE: Make sure the lap and shoulder belt are placed under armrests as shown.

NOTE: A snug belt should not allow any slack. It lies in a relatively straight line without sagging. It does not press on the child's flesh or push the child's body into an unnatural position.

⚠ WARNING

Do not use this child restraint if the midpoint of your child's head is above the top of the vehicle seat back or vehicle headrest.

Use only the vehicle's lap and shoulder belt system when restraining the child in this booster seat.



Check vehicle instructions for more information about air bag/child restraint use.


Do Not Use only the lap belt when using this seat.

The shoulder belt must always be adjusted snugly across the child's chest.

NEVER place the shoulder belt under the child's arms or behind child's back.


Failure to follow these warnings could cause serious injury or death to your child.





⚠ WARNING

Do not use this child restraint without the seat pad. Failure to do this can result in serious injury.

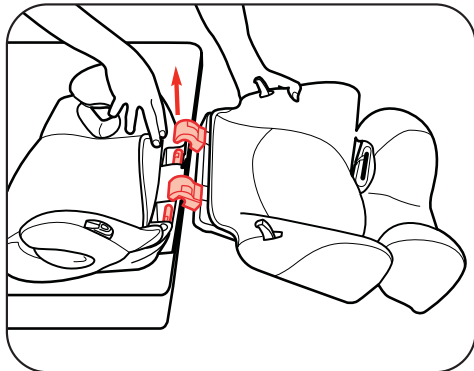


1 Remove Backrest

Place seat base close to an edge of a table. Rotate the backrest down.


Lift the backrest off the seat base.

NOTE: Backrest needs to rotate below the seat base.

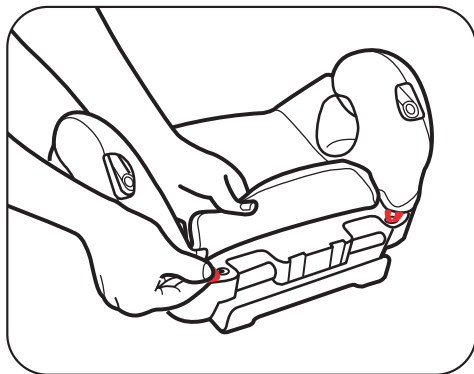


2 Release Elastic Straps on Seat Base

From the back of the seat base, release the 2 elastic straps.

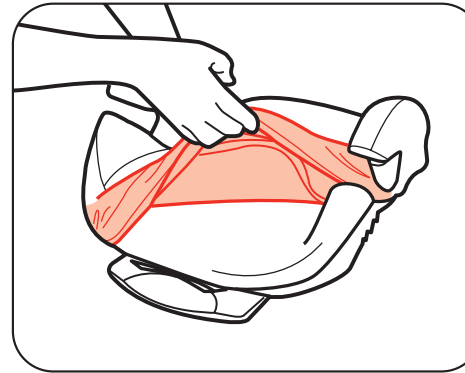


3 Pull Pad Off Seat Base



From the front of the seat base, pull the pad off the seat base. Work the pad off of the lap belt guides.

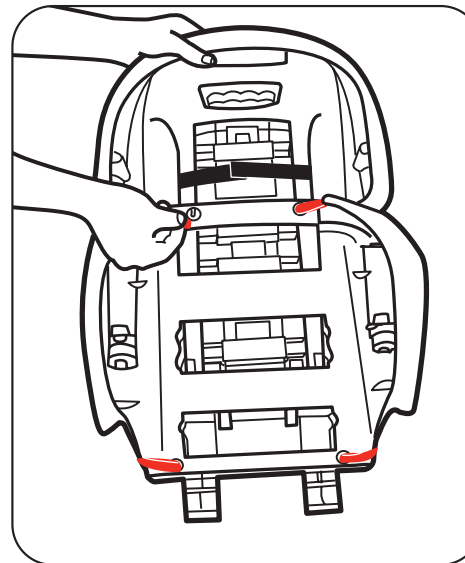

4 Release Elastic Straps on Backrest


From the back of the backrest, release the 4 elastic straps.



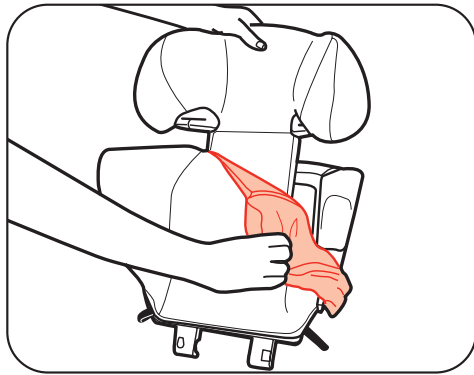


5 Pull Pad Off Backrest

From the front of the backrest, pull the pad off the seat base.

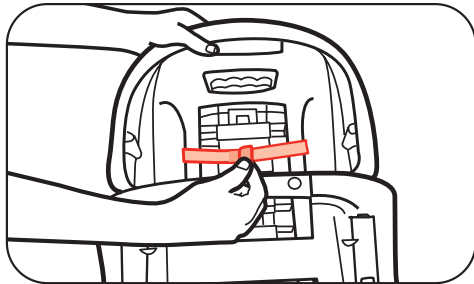

6 Release Fastening Strip

From the back of the headrest, unfasten the fastening strip.

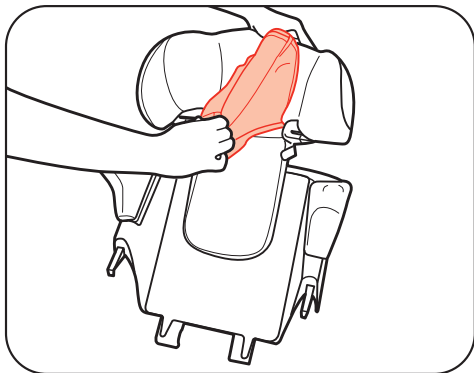

7 Pull Pad Off Headrest


From the front of the headrest, pull the pad off the headrest.




8 Replace the Seat Pad

Replace seat pad by reversing order; put pad on headrest and tuck pad under the shoulder belt guides and attach the fastening strips. Slide backrest pad on backrest and from the back, attach the elastic straps. Starting from the front of the seat base, slide the pad onto the base seat and over the armrests. Tuck the pad under and around the lap belt guides and attach the elastic straps on the back of the seat base.

NOTE: Make sure to tuck the pad around the shoulder belt guides and lap belt guides.





Dorel Juvenile Group, Inc. (DJG) warrants this product to the original retail purchaser as follows:
 This product is warranted against defective materials or workmanship for one year from the date of original purchase. **An original receipt is required to validate your warranty.** DJG will, at its option, provide replacement parts or replace this product. DJG reserves the right to substitute if the part or model has been discontinued.

To make a claim under this warranty you may contact us at www.maxi-cosi.com, fax us at 1-800-207-8182 24 hours a day, write to DJG, Consumer Relations Department, P. O. Box 2609, Columbus, IN 47202-2609, or call 1-800-951-4113 from 7:00 a.m. to 6:00 p.m. EST Monday through Thursday and from 7:00 a.m. to 4:30 p.m. on Friday. **Proof of purchase is required and shipping charges are the responsibility of the consumer.**

Warranty Limitations:

This warranty does not include damages which arise from misuse or abuse of this product.

Limitation of Damages:

The warranty and remedies as set forth are exclusive and in lieu of all others, oral or written, expressed or implied. In no event will DJG or the dealer selling this product be liable to you for any damages, including incidental or consequential damages, arising out of the use or inability to use this product.

Limitation of warranties and other warranty terms and state law rights:

Any implied warranties, including implied warranties of the merchantability and fitness for a particular purpose, shall be limited to the duration and terms of the express written warranty. Some states do not allow limitations as to how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you. This warranty gives you specific legal rights, and you may have other rights, which vary from state to state. Neither DJG nor the dealer selling this product authorized any person to create for it any other warranty, obligation, or liability in connection with this product.

PLEASE COMPLETE AND MAIL THE PRE-ADDRESSED OWNER REGISTRATION CARD WITHIN (30) DAYS OF PURCHASE TO EXPEDITE WARRANTY CLAIMS AND TO VERIFY THE ORIGINAL DATE OF PURCHASE.

Complete the form below. Your model number with color code and manufacturer date code **MUST** be included on the form to ensure proper replacement parts. Your model number with color code and the date code can be found on a sticker on the bottom of the child restraint. Payment in U.S. dollars must accompany your order. Choose parts needed from the list on the next page.
 Return the form with payment to:

Dorel Juvenile Group, Inc.
Consumer Relations Department
P.O. Box 2609
Columbus, IN 47202-2609

Fax orders to: 1-800-207-8182

Please make money orders payable to Dorel Juvenile Group, Inc. Fill in the area below to charge to Visa or Mastercard. We do not accept personal checks or Discover Card. All outside of U.S. and Canada **MUST** use credit card.

Ship To (Please Print): _____

Name: _____

Address: _____

City: _____

State/Province: _____ Zip _____

Telephone: _____

Email Address: _____

We **MUST have this information to process your order:**

Model Number (5 digits & 3 letters): _____

Manufacture Date (mm/dd/yyyy): _____

rodi™ xr

rodi™ xr

