

Studio-Quality Video Performance

OLEVIA 265T FHD



- > 65" State-of-the-Art LCD Full HD LCDTV
- > 1920 x 1080 Resolution (16:9 Aspect Ratio)
- > SiliconOptix Realta HQV™ Video Processing
- > Director's Image™—Watch programs with the rich colors and image enhancements as the director intended
- > Big Picture Technology™—See the entire broadcast, with overscan minimization
- > Ease of Use—User Friendly OSD wheel
- > FutureProof™—User upgradeable firmware via USB to add features, keep current
- > Full Picture-in-Picture/ Split-Screen
- > 176-degree Ultra Wide Viewing Angle
- > 2000:1 Contrast Ratio
- > Super Fast 6ms Response Time
- > 60,000 hour lamp life
- > RF Inputs—Standard definition TV, 480i, 480p, 720p, 1080i, 1080p
- > Video Inputs—2 ATSC/NTSC combo tuner input, 2 HDMI with HDCP, 3 component, VGA, 2 S-video, 2 composite
- > PC Input—HDMI, VGA-1920 x 1080 @60 Hz
- > Easy To Use Universal Remote Control
- > RS-232 Control
- > Quick Start Guide, Full User's Manual on CD-Rom
- > OleviaCare™ in-house tech support/customer support

Olevia 2 Series

For studio-quality, high-definition TV, the 65-inch Olevia 265T FHD LCDTV delivers a simply stunning HDTV experience for home or commercial applications. Engineered to display the richest, most vibrant images, the Olevia 265T FHD LCDTV features the industry's most advanced SiliconOptix Realta Hollywood Quality Video (HQV™) processor powered by Teranex technology. It offers dual ATSC/NTSC tuners, a super-wide 176-degree viewing angle, 2000:1 Contrast Ratio, and fast 6 ms response time. With dual HDMI connectivity and three components inputs, the Olevia 265T FHD delivers it all—high-definition digital TV and widescreen movies (up to 1080p native resolution), standard analog TV, action sports, video games, and home videos — with stunningly crisp and vibrant imagery, realistic and immersive sound. This 65-inch FHD LCDTV can even double as a presentation display with support for PC resolutions up to 1920x1080 through HDMI and VGA. The 265T FHD's speakers complement its Dolby Digital™ intelligent digital amplifier. The result? Theater-quality audio and an exceptional entertainment experience — all thanks to Olevia.

The Olevia 2 Series - Premium Video & Audio

The 265T FHD LCDTV is one of the Olevia 2 Series LCD FHD LCDTVs designed expressly to deliver breakthrough performance and top quality. Vibrant images, powerful dual combo tuner technology for viewing two HD stations simultaneously, and built-in RS-232 control for connection with entertainment systems and media centers make the Olevia 2 Series ideal for virtually any content and any environment. And, as with all Olevia 3, 5 and 7 Series TVs, the 265T FHD LCDTV features:

Director's Image™

Calibrated 6500K color and a full range of brightness, contrast, color, tint, sharpness and mode controls available to tune image quality.

Big Picture Technology™

Advanced technology displays up to 37% more of analog images and 11% more of digital broadcast images, without distortion.

HDMI with High Definition Content Protection

Olevia LCD TVs include HDMI inputs, the preferred interface for FHD TV, to provide the best in pure digital video quality.

User Friendly On-Screen Display (OSD)

Scrolling icon wheel simplifies use and features preset video and lighting modes for different environments and content types.

Firmware upgradeable via USB

The latest software updates and quality improvements available from the Olevia website, easily uploadable to your TV through its USB port.

OleviaCare™

Live, in-house technical and customer support personnel assure a total quality experience — every time.



265T FHD

The Perfect Balance of Quality and Value


265T FHD

Olevia 65" FHD LCDTV Specifications

LCD Panel	Type Display Area Aspect Ratio Contrast Ratio Viewing Angle Response Time	65", 1920x1080 resolution 56.3" horizontal x 31.8" vertical 64.5" diagonal 16:9 2000:1 176° horizontal, 176° vertical 6ms
Video Input	HDMI Component Input VGA Input S-Video Input AV Input RF	2 HDMI w/ HDCP, PC + Video, Plug & Play 3 Component + 3 R/L RCA Audio (VGA connector accept 3rd component source) RGB 15 Pin D-sub, PC + Video, Plug & Play Third Component Input + R/L RCA Audio 2 S-Video with R/L RCA Audio (Share w/AV Input) 2 Composite Video with R/L RCA Audio (Share w/S-Video Input) NTSC/ATSC Dual Tuner
Audio Output	Audio Output Digital Output Headphone	1 R/L RCA Audio, 1 Coaxial Audio, 1 Subwoofer 1 Optical Audio 1 Stereo Mini jack
Audio	Speakers	80 Watt Speakers (2X40W)
Compatibility	Video PC	NTSC & ATSC with High Definition (480i, 480p, 720p, 1080i, 1080p) Compatible up to 1920x1080@60Hz preferred
Power	Voltage Consumption	100-240 (universal), 50-60Hz 610 Watts
Other Feature	Front Panel Remote Service Port	Power, Menu, Source, Channel up/down, volume up/down Universal Remote Control USB
Additional Feature	On Screen Display Control Port	Parental Control, Closed Captioning, 3:2 Pull Down, 3D Comb filter, OSD lock, OSD Lock out, Volume Limiter, Separate and Hidden IR Remote Button Command for each input, Power lock, Director's Image, Big Picture Technology, OSD Display Modes, Aspect Ratio, Linear and Panoramic Scaling, Brightness, Contrast, Color, Tint, and Sharpness Controls, Firmware upgradeable via USB. RS-232C
Accessories	Wall-mount	VESA 200 x 200, 200x400 (recommend wallmount-WM60D)
Dimensions (WxHxD)	W/ Stand W/O Stand	61.8"x39.5"x16" 61.8"x38"x7.2"
Net Weight	W/ Stand W/O Stand	209 lbs. 180 lbs.
Regulatory Approval		FCC-B, UL, cUL, ICES003, CSA, Energy Star, Green Product Compliant
Warranty		One year parts and labor, One year on-site



Front

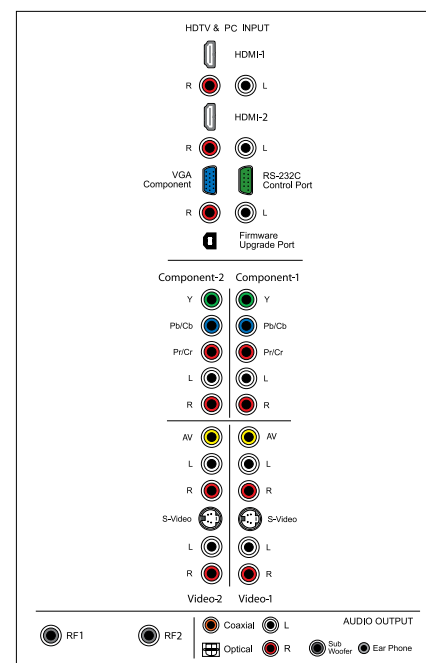

Inputs

Product designs and specifications are subject to change without notice.

