



2011 Product Line





2011 Product Line

Table of Contents:

LCD Flat Screen TVs	4
In Wall Mount/TFT LCD Monitors	6
Motorized Projector Screen/Video Projectors w/ HD Ready	7
LCD Desktop/Motorized Flat Panel TV Ceiling Mount	8
HDTV Video Kit w/ LED/ Flat Panel TV Wall Steel Shelf	9
LCD Mounting Brackets Built In Leveler System	10
LCD TV Cabinets/Sound Bar System	23
HDTV Audio/Video Connection Kit/ Cleaning Kit	24
Component Video Converters	25
HDMI Components	27
HDMI Cables /DVI Adapters/In-Wall Plates	28
Surveillance Indoor/Outdoor Camera System	33
iPod/iPad Docking Alarm Clock Radio & Subwoofers	35
Home Theater Speaker Tower w/ iPod Docking	39
Bass Expanding Single/Dual Mini Speakers	40
Voice Recorder/Wireless Headphones & Amplifiers	43
Earbuds & Waterproof Headphones	44
Professional Conference Wireless Microphone System & Mini PA Amplifiers	46
Rack Mount Power Amplifiers	50
Home Stereo Receivers System	52
Vintage Turntable w/ USB Recording and iPod Player	55
Speaker Selector/ USB Turntable & Cassette Tape Converter to PC	56
Volume Controls and Pre-Construction Speaker Brackets	57
In-Ceiling Speaker System	58
In-Wall Speaker System	63
Ceiling Mount Speaker System/Mini Cube Speakers	65
Mini Monitor Speaker Box/Powered Subwoofer	66
Indoor/Outdoor Waterproof Speakers	69
PA Horn Speakers	71
Tripods & Home Theater Speaker Stands	74
Garden Speaker System	75

PTC155LC

15.6" Hi-Definition Flat Panel LCD TV

- 15.6" LCD Screen
- NTSC Auto Color System
- 16:9 (Widescreen) Screen Aspect Ratio
- Built-In Analog (NTSC)/Digital (HD/ATSC) Tuners
- 262K Colors
- 1366 x 768 High Resolution
- HDTV Compatible: 480i, 480p, 720p, 1080i
- 400:1 Contrast Ratio
- 220 Brightness cd/m²
- Progressive Scan CCD, V-Chip
- 90° Horizontal/ 45° Vertical Viewing Angle
- Built-In Speakers 2 x 3W
- Removable Base Stand
- VESA Wall Mount Compatible (Bracket not Included)
- Multi Language OSD (English/French/Spanish)
- Multiple Input Options: AV, S-Video, VGA, HDMI, YPbPr Ports, Phone
- RF Cable Input
- Full Function Wireless Remote Control
- AC Input: 110V/240 Voltage Selectable
- 35W Power Consumption
- Dimensions: 15.8" W x 12.9" H x 3.6" D
- Weight: 7.92 lbs



PTC166LD

15.6" Hi-Definition LCD Flat Panel TV w/ Built-In DVD Player

- 15.6" LCD Screen
- NTSC Auto Color System
- Built-In Progressive Scan DVD Player
- Compatible Formats: DVD, VCD, MP3, CD, CD-RW
- 16:9 (Widescreen) Screen Aspect Ratio
- Built-In Analog (NTSC)/Digital (HD/ATSC) Tuners
- 262K Colors
- 1366 x 768 High Resolution
- HDTV Compatible: 480i, 480p, 720p, 1080i
- 400:1 Contrast Ratio
- 220 Brightness cd/m²
- Progressive Scan CCD, V-Chip
- 90° Horizontal/ 45° Vertical Viewing Angle
- Built-In Speakers 2 x 3W
- Removable Base Stand
- VESA Wall Mount Compatible (Bracket not Included)
- Multi Language OSD (English/French/Spanish)
- Multiple Input Options: AV, S-Video, VGA, HDMI, YPbPr Ports, Phone
- RF Cable Input
- Full Function Wireless Remote Control
- AC Input: 110V/240 Voltage Selectable
- 35W Power Consumption
- Dimensions: 15.8" W x 12.9" H x 3.6" D



PTC177LC

17" Hi Definition LCD Flat Panel TV

- 17" LCD Screen
- NTSC Auto Color System
- 16:10 (Widescreen) Screen Aspect Ratio
- Built-In Analog (NTSC)/Digital (HD/ATSC) Tuners
- 262K Colors
- 1366 x 768 High Resolution
- HDTV Compatible: 480i, 480p, 720p, 1080i
- 400:1 Contrast Ratio
- 220 Brightness cd/m²
- Progressive Scan CCD, V-Chip
- 90° Horizontal/ 45° Vertical Viewing Angle
- Built-In Speakers 2 x 10W
- Removable Base Stand
- VESA Wall Mount Compatible (Bracket not Included)
- Multi Language OSD (English/French/Spanish)
- Multiple Input Options: AV, S-Video, VGA, HDMI, YPbPr Ports, Phone
- RF Cable Input
- Full Function Wireless Remote Control
- Headphone Output
- AC Input: 110V/240 Voltage Selectable
- 30W Power Consumption
- Dimensions: 15.8" W x 12.9" H x 3.6" D



PTC19LC

19" Hi-Definition LCD Flat Panel TV

- 19" LCD Screen
- NTSC Auto Color System
- 16:10 (Widescreen) Screen Aspect Ratio
- Built-In Analog (NTSC)/Digital (HD/ATSC) Tuners
- 16.2M Colours
- 1440 x 900 High Resolution
- HDTV Compatible: 480i, 480p, 720p, 1080i
- 500:1 Contrast Ratio
- 400 Brightness cd/m²
- 160° Horizontal/ 135° Vertical Viewing Angle
- Built-In Speakers 2 x 10W
- Removable Base Stand
- VESA Wall Mount Compatible (Bracket not Included)
- Multi Language OSD (English/French/Spanish)
- Multiple Input Options: AV, HeadPhone, S-Video, VGA, HDMI, YPbPr Ports
- RF Cable Input
- Full Function Wireless Remote Control
- AC Input: 110V/220 Voltage Selectable
- 60W Power Consumption
- Dimensions: 19.5" W x 16.8" H x 2.8" D
- Weight: 11 lbs



PTC20LD

19" Hi-Definition LCD Flat Panel TV w/ Built-In DVD Player

- 19" LCD Screen
- Built-In Progressive Scan DVD Player
- Compatible Formats: DVD, VCD, MP3, CD-RW
- NTSC Auto Color System
- 16:10 (Widescreen) Screen Aspect Ratio
- Built-In Analog (NTSC)/Digital (HD/ATSC) Tuners
- 16.2M Colours
- 1440 x 900 High Resolution
- HDTV Compatible: 480i, 480p, 720p, 1080i
- 500:1 Contrast Ratio
- 400 Brightness cd/m²
- Progressive Scan CCD, V-Chip
- 160° Horizontal/ 135° Vertical Viewing Angle
- Built-In Speakers 2 x 10W
- Removable Base Stand
- VESA Wall Mount Compatible (Bracket not Included)
- Multi Language OSD (English/French/Spanish)
- Multiple Input Options: AV, HeadPhone, S-Video, VGA, HDMI, YPbPr Ports
- RF Cable Input
- Full Function Wireless Remote Control
- AC Input: 110V/120 Voltage Selectable
- 70W Power Consumption
- Dimensions: 19.5" W x 16.8" H x 2.8" D
- Weight: 13.4 lbs





Product Line

PTC22LC

22" Hi-Definition LCD Flat Panel TV

- 22" LCD Screen
- NTSC Auto Color System
- 16:9 (Widescreen) Screen Aspect Ratio
- Built-In Analog (NTSC)/Digital (HD/ATSC) Tuners
- 16.7M Colors
- 1366 x 768 High Resolution
- HDTV Compatible: 480i, 480p, 720p, 1080i
- 800:1 Contrast Ratio
- 400 Brightness cd/m2
- Progressive Scan CCD, V-Chip
- 170° Horizontal/ 160° Vertical Viewing Angle
- Built-In Speakers 2 x 3W
- Removable Base Stand
- VESA Wall Mount Compatible (Bracket not Included)
- Multi Language OSD (English/French/Spanish)
- Multiple Input Options: AV, S-Video, VGA, HDMI, YPbPr Ports, Phone
- RF Cable Input
- Full Function Wireless Remote Control
- AC Input: 110V/240 Voltage Selectable
- 60W Power Consumption
- Dimensions: 21.1"W x 16.7"H x 3.7"D
- Weight: 10.56 lbs



PTC27LD

26" Hi-Definition LCD Flat Panel TV w/ Built-In DVD Player

- 26" LCD Screen
- Built-In Progressive Scan DVD Player
- Compatible Formats: DVD, VCD, MP3, CD-RW
- NTSC Auto Color System
- 16:9 (Widescreen) Screen Aspect Ratio
- Built-In Analog (NTSC)/Digital (HD/ATSC) Tuners
- 16.2M Colours
- 1366 x 768 High Resolution
- HDTV Compatible: 480i, 480p, 720p, 1080i
- 800: 1 Contrast Ratio
- 500 Brightness cd/m2
- Progressive Scan CCD, V-Chip
- 160° Horizontal/ 135° Vertical Viewing Angle
- Built-In Speakers 2 x 20W
- Removable Base Stand
- VESA Wall Mount Compatible (Bracket not Included)
- Multi Language OSD (English/French/Spanish)
- Multiple Input Options: AV, S-Video, VGA, HDMI, YPbPr Ports
- RF Cable Input
- Full Function Wireless Remote Control
- AC Input: 110V/120 Voltage Selectable
- 135W Power Consumption
- Dimensions: 26.8" W x 20.7"H x 3.7"D
- Weight: 28 lbs



PTC32LC

32" Hi-Definition LCD Flat Panel TV

- 32" LCD Screen
- NTSC Auto Color System
- 16:9 (Widescreen) Screen Aspect Ratio
- Built-In Analog (NTSC)/Digital (HD/ATSC) Tuners
- 16.7M Colours
- 1366 x 768 High Resolution
- HDTV Compatible: 480i, 480p, 720p, 1080i
- 1000:1 Contrast Ratio
- 500 Brightness cd/m2
- Progressive Scan CCD, V-Chip
- 176° Horizontal/ 176° Vertical Viewing Angle
- Built-In Speakers 2 x 20W
- Removable Base Stand
- VESA Wall Mount Compatible (Bracket not Included)
- Multi Language OSD (English/French/Spanish)
- Multiple Input Options: AV, S-Video, VGA, HDMI, YPbPr Ports
- RF Cable Input
- Full Function Wireless Remote Control
- AC Input: 110V/220 Voltage Selectable
- 140W Power Consumption
- Dimensions: 32"W x 24.3"H x 4"D
- Weight: 33 lbs



PTC42LC

42" Hi-Definition LCD TV

- 42" Hi-Definition LCD TV
- NTSC Auto Color System
- 16:9 (Widescreen) Screen Aspect Ratio
- Built-In Analog (NTSC)/Digital (HD/ATSC) Tuners
- 16.7M Colors
- 1920 x 1080 High Resolution
- HDTV Compatible: 480i, 480p, 720p, 1080i, 1080P
- 1200:1 Contrast Ratio
- 500 Brightness cd/m2
- Progressive Scan CCD, V-Chip
- 178° Horizontal/ 178° Vertical Viewing Angle
- Built-In Speakers 2 x 8W
- Removable Base Stand
- VESA Wall Mount Compatible (Bracket not Included)
- Multi Language OSD (English/French/Spanish)
- Multiple Input Options: AV, S-Video, VGA, HDMI*2, YPbPr Ports
- RF Cable Input
- Full Function Wireless Remote Control
- AC Input: 110V/240 Voltage Selectable
- 220 Watts Power Consumption
- Dimensions: 41.9" W x 31.7" H x 12.2" D
- Weight: 63.8 lbs



PTC8LCD

8" LCD Digital TV with Built-in USB/SD/MP3/MPEG4 For Car/Home Use

- Digital TV (ATSC) Digital Photo Frame (DPF)
- QAM tuning cable TV and ATSC digital TV(OTA)
- 8 inch Digital LCD screen display with 16:9 Ratio.
- Capable of receiving both SD and HD channels
- Support FM Radio Function
- SD, MMC, MS card, and USB Disk.
- Video decode of ATSC A53E Table A3 formats.
- JPEG/MP3/WMA/MPEG-1/MPEG-2/MPEG-4 files
- MP@HL MPEG-2 HD video decode.
- Easily operated by remote control or button
- Dolby® Digital (AC-3) Audio Decode.
- Ultra-slim and fashionable frame design With mirror finishing.
- automatic and manual search for TV channels.
- Hook eyes for Wall-mountable use
- Easy Carrying Bag Included
- Wireless Remote Control Included
- Digital TV Magnetic Antenna
- Built-in earphone jack.
- 12 Volt Car Plug Included
- AC Adapter Included



PTC10LCD

10.1" LCD Digital TV with Built-in USB/SD/MP3/MPEG4 For Car/Home Use

- Digital TV (ATSC) Digital Photo Frame (DPF)
- QAM tuning cable TV and ATSC digital TV (OTA)
- 10.1 inch Digital LCD screen display with 16:9 Ratio.
- Capable of receiving both SD and HD channels
- Support FM Radio Function
- SD, MMC, MS card, and USB Disk.
- Video decode of ATSC A53E Table A3 formats.
- JPEG/MP3/WMA/MPEG-1/MPEG-2/MPEG-4 files
- MP@HL MPEG-2 HD video decode.
- Easily operated by remote control or button
- Dolby® Digital (AC-3) Audio Decode.
- Ultra-slim and fashionable frame design with mirror finishing
- automatic and manual search for TV channels.
- Hook eyes for Wall-mountable use
- Easy Carrying Bag Included
- Wireless Remote Control Included
- Digital TV Magnetic Antenna
- Built-in earphone jack.
- 12 Volt Car Plug Included
- AC Adapter Included

NEW FOR 2011



PLVW9IW

9.2" In-Wall Mount TFT LCD Flat Panel Monitor For Home & Mobile Use

- 9.2" TFT LCD Screen Wall Mount
- PAL/NTSC Auto Color System
- 16:9 Screen Aspect Ratio
- 640 x 480 High Resolution
- 300:1 Contrast Ratio
- Wireless Remote Control
- Brightness: 350 cd/m2
- Viewing Angle: 40 degrees Up/70 degrees Down/Left & Right 70 degrees
- Video Input: RCA & VGA
- Power Supply: DC 12V
- BNC Connector
- For Use in Limousine/RV/Bus
- Wall Mounting Bracket Included
- Mounting Trim Included
- Clean and Professional Installation
- Dimensions: 9.84"W x 0.57"H x 1.10"D



PLVW10IW

10.4" In-Wall Mount TFT LCD Flat Panel Monitor w/VGA Input

- 10.4" TFT LCD Screen In-Wall Mount
- PAL/NTSC Auto Color System
- 4:3 Screen Aspect Ratio
- 800 x 640 High Resolution
- 300:1 Contrast Ratio
- Wireless Remote Control
- Special Function Control Box
- Brightness: 350cd/m2
- Viewing Angle: 40° Up/ 70° Down/ Left Right 70°
- Video Input: RCA VGA
- Power Supply: DC 12V
- Screen Dimensions 11.41"W x 7.48"H x 0.98"D
- Control Box Dimensions 1.58"W x 1.58"H x 1.07"D
- Weight: 2.27 LBS
- Mounting Trim Included
- Clean and Professional Installation



PLVW15IW

15" In-Wall Mount TFT LCD Flat Panel Monitor w/VGA & RCA Input

- 15" TFT LCD Screen In Wall Mount
- PAL/NTSC Auto Color System
- 4:3 Screen Aspect Ratio
- 1024 x 768 High Resolution
- 400:1 Contrast Ratio
- Wireless Remote Control
- Special Function Control Box
- Brightness: 260cd/m2
- Viewing Angle: 40° Up/ 70° Down/ Left Right 70°
- Video Input: RCA VGA
- Power Supply: DC 12V
- Screen Dimensions 13.77" W x 10.23" H x 1.02" D
- Control Box Dimensions 1.58"W x 1.58"H x 1.07"D
- Weight: 3.52 LBS
- Mounting Trim Included
- Clean and Professional Installation



PLVW17IW

17" In-Wall Mount TFT LCD Flat Panel Monitor For Home & Mobile Use

- 17" TFT LCD Screen Wall Mount
- PAL/NTSC Auto Color System
- 16:9 Screen Aspect Ratio
- 1280x800 High Resolution
- 300:1 Contrast Ratio
- Wireless Remote Control
- Brightness: 350 cd/m2
- Viewing Angle: 40 degrees Up/70 degrees Down/Left & Right 70 degrees
- Video Input: RCA & VGA
- Power Supply: DC 12V
- BNC Connector
- For Use in Limousine/RV/Bus
- Wall Mounting Bracket Include
- Dimensions: 16.07"W x 10.73"H x 1.10"D
- Mounting Trim Included
- Clean and Professional Installation



PLVW19IW

19" In-Wall Mount TFT LCD Flat Panel Monitor For Home & Mobile Use

- 19" TFT LCD Screen Wall Mount
- PAL/NTSC Auto Color System
- 16:9 Screen Aspect Ratio
- 1440 x 900 High Resolution
- 300:1 Contrast Ratio
- Wireless Remote Control
- Brightness: 350 cd/m2
- Viewing Angle: 40 degrees Up/70 degrees Down/Left & Right 70 degrees
- Video Input: RCA & VGA
- Power Supply: DC 12V
- BNC Connector
- For Use In Limousine/RV/Bus/Home
- Wall Mounting Bracket Included
- Dimensions: 18.3"W x 11.22"H x 1.10"D
- Mounting Trim Included
- Clean and Professional Installation





Product Line

PRJES180

180" Hanging Electronic Motorized Projector Screen

- Opposite Angle: 180"
- Production Dimensions: 88" x 157"
- Proportion: 16:9
- Package Dimensions: 17.20" x 0.63" x 0.63"
- Gross/ Net Weight: 66.36/ 56.44 lbs



PRJES200

200" Hanging Electronic Motorized Projector Screen

- Opposite Angle: 200"
- Production Dimensions: 120" x 160"
- Proportion: 4:3
- Package Dimensions: 17.48" x 0.63" x 0.63"
- Gross/ Net Weight: 73.63/ 62.61 lbs



PRJHD66

5 Inch TFT LCD Video Projector w/ HD Ready

- Projection System: 5 inch TFT LCD
- Horizontal Definition: 480 Lines (Better than DVD Definition)
- Projection Lighting Source: 6000-8000 Hours
- Contrast: 800:1
- Lens: 3 Flake Broad Band Film Plating & High Definition Focus
- LCD Pixel: 800 x 480 MAX Support 1080p
- Illumination Level: 2000 Lumen
- Signal System: Supporting International System
- Working Voltage: AC 90-110 V 50 HZ
- Machine Power 200 Watts
- Dimensions: 11"H x 6"W x 15"D



PRJHD198

5 Inch TFT LCD Video Projector w/ HD Ready

- Projection System: 5 inch TFT LCD
- Horizontal Definition: 480 Lines (Better than DVD Definition)
- Projection Lighting Source: 6000-8000 Hours
- Contrast: 800:1
- Lens: 3 Flake Broad Band Film Plating & High Definition Focus
- LCD Pixel: 800 x 480 MAX Support 1080p
- Illumination Level: 2000 Lumen
- Signal System: Supporting International System
- Working Voltage: AC 90-110 V 50 HZ
- Machine Power 200 Watts
- Dimensions: 11"H x 6"W x 15"D



PRJSD188

5 Inch TFT LCD Video Projector w/ HD Ready

- Projection System: 5 inch TFT LCD
- Horizontal Definition: 480 Lines (Better than DVD Definition)
- Projection Lighting Source: 6000-8000 Hours
- Contrast: 800:1
- Lens: 3 Flake Broad Band Film Plating & High Definition Focus
- LCD Pixel: 800 x 480 MAX Support 1080p
- Illumination Level: 2000 Lumen
- Signal System: Supporting International System
- Working Voltage: AC 90-110 V 50 HZ
- Machine Power 200 Watts
- Dimensions: 11"H x 6"W x 15"D inch



PRJV66

5 Inch TFT LCD Video Projector w/ HD Ready

- Projection System: 5 inch TFT LCD
- Horizontal Definition: 480 Lines (Better than DVD Definition)
- Projection Lighting Source: 6000-8000 Hours
- Contrast: 800:1
- Lens: 3 Flake Broad Band Film Plating & High Definition Focus
- LCD Pixel: 800 x 480 MAX Support 1080p
- Illumination Level: 2000 Lumen
- Signal System: Supporting International System
- Working Voltage: AC 90-110 V 50 HZ
- Machine Power 200 Watts
- Dimensions: 11"H x 6"W x 15"D inch



PDLB372

10" To 24" Dual Swing Arm LCD Desktop Mount

- Universal Mounts Fits Virtually Any 10" To 24" Plasma Or Lcd Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Tilt And Leveling Adjustments
- Max Load: 33.1lbs
- Vesa: 3.9 X 3.9"
- Product Dimension: 3.9" X 3.9" X 11.8"
- Package Dimension: 25.6" X 19.9" X 11.2"
- Gross/Net Weight: 36.4/31 Lbs



PDLB373

10" To 24" Swing Arm LCD Desktop Mount

- Universal Mounts Fits Virtually Any 10" To 24" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate for Fast Installation
- Tilt and Leveling Adjustments
- Max Load: 33.1lbs
- Vesa: 3.9 x 3.9"
- Product Dimension: 3.9" X 3.9" X 11.8"
- Package Dimension: 25.6" X 19.9" X 10.2"
- Gross/Net Weight: 33/28.7 lbs



PDLB374

10" To 24" LCD Desktop Mount

- Universal Mounts Fits Virtually Any 10" To 24" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate for Fast Installation
- Tilt and Leveling Adjustments
- Max Load: 33.1lbs
- Vesa: 3.9 X 3.9"
- Product Dimension: 3.9" X 3.9" X 11.8"
- Package Dimension: 31.1" X 18.7" X 6.7"
- Gross/Net Weight: 33/28.7lbs



PETRI04

17" To 37" Motorized Universal Flat Panel TV Tilted Ceiling Mount

- Universal Mounts Fits Virtually Any 17" To 37" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Motorized Left to Right
- Remote Control Included
- Max Load: 88lbs
- VESA 15.7" X 11.8"
- Distance To The Wall: 20.5"
- Universal Dimension: 17.3" X 13.2" X 20.5"
- Package Dimension: 27.6" X 14.2" X 7.5"
- Gross/Net Weight: 30.9/26.5lbs
- AC/DC Adaptor 110/220V



PETRI05

26" To 42" Motorized Universal Flat Panel TV Tilted Ceiling Mount


- Universal Mounts Fits Virtually Any 26" To 42" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Motorized Up And Down And Left To Right Positioning
- Max Load: 88lbs
- VESA 19.7" X 15.7"
- Distance To The Wall: 19.7"
- Universal Dimension: 24.4" X 16.9" X 19.7"
- Package Dimension: 30.7" X 13.9" X 9.3"
- Gross/Net Weight: 46.3/41.9lbs
- AC/DC Adaptor 110/220V Remote Control Included



PETWI02

17" to 37" Motorized Universal Flat Panel TV Tilt wall mount

- Universal mounts fits virtually any 17" to 37" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Motorized left to right
- Max load: 88lbs
- VESA 15.7" x 11.8"
- Distance to the wall: 10.2"
- Product dimension: 17.3" x 13.2" x 10.2"
- Package dimension: 27.6" x 19" x 6.1"
- Gross/Net weight: 46.3/41 lbs.
- AC/DC Adaptor 110/220V
- Remote control Included

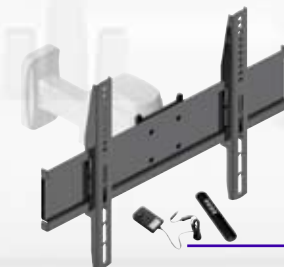



Product Line

PETW103

26" To 42" Motorized Universal Flat Panel TV Tilt Wall Mount

- Universal Mounts Fits Virtually Any 26" To 42" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto the Wall Plate For Fast Installation
- Motorized Up And Down and Left To Right
- Built In Leveler System Max Load: 88lbs,
- VESA 19.7" X 15.7"
- Distance to the Wall: 10.6"
- Product Dimension: 24.4" X 16.9" X 10.6"
- Package Dimension: 26.6" X 18.9" X 9.4"
- Gross/Net Weight: 35/31lbs
- AC/DC Adaptor 110/220V
- Remote Control Included



PLEDTKIT1

HDTV Video Kit with LED TV Wall Mount, HDMI Cable, and Screen Cleaner For 26" To 42" Flat Panel TV

- HDMI Cable
- High Definition Screen Cleaner
- Super Slim Flat Panel TV Wall Mount
- Only 12.8mm From The Wall
- Easy Lock and Release System
- Including Integrated Bubble Level
- Fits VESA Size from 100x100mm to 400x400mm
- For 26" - 42" Flat Panel TV
- Supports Up To 80 Lbs.



PLEDTKIT2

HDTV Video Kit With LED TV Wall Mount, HDMI Cable, And Screen Cleaner For 32" To 60" Flat Panel TV

- HDMI Cable
- High Definition Screen Cleaner
- Super Slim Flat Panel TV Wall Mount
- Only 0.5 Inches From The Wall
- Easy Lock and Release System
- Including Integrated Bubble Level
- Fits VESA Size from 100x100mm to 600x400mm
- For 32" - 60" Flat Panel TV
- Supports Up To 125 Lbs.



PLEDTKIT3

Heavy-Duty HDTV Video Kit with LED TV Wall Mount, HDMI Cable, And Screen Cleaner For 32" To 60" Flat Panel TV

- HDMI Cable
- High Definition Screen Cleaner
- Super Slim Flat Panel TV Wall Mount
- Only 0.5 Inches From The Wall
- Easy Lock and Release System
- Including Integrated Bubble Level
- Fits VESA Size from 100x100mm to 800x600mm
- For 32" - 60" Flat Panel TV
- Supports Up To 150 Lbs.



PSPSF101B

23"-42" Flat Panel TV Wall Unit with Acrylic & Steel Shelf

- Shelf 23" to 42" Flat Panel TV's
- TV's Monitor Stand w Built-in Cable Routing
- Weight Capacity: 132.28 Pounds
- Dimensions: 46.46" x 37.79" x 19.68"



PSPSF103


36"-42" Flat Panel TV Wall Unit with Acrylic & Steel Shelf

- Shelf 36" to 42" Flat Panel TV's
- TV's Monitor Stand w Built-in Cable Routing
- Weight Capacity: 110.23 Pounds
- Dimensions: 23.6" X 19.7" X 47.2"




PSPSW I 0 I L 42"-70" Flat Panel TV Flush Wall Mount

- Universal Flat Panel Flush Mount For 42" To 70" Screens
- Universal Brackets Easily Hook Onto Wall Plate for Fast installation
- Weight Capacity: 165.35 Pounds
- Interface Size: 25.59" x 34.25"
- Distance to the Wall: 2.95"
- Dimensions: 35.14" x 25.59" x 2.95"

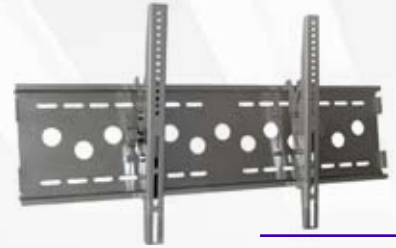


PSPSW I 1 6 L 36"-50" Flat Panel TV Articulating Wall Mount

- Universal Flat Panel Flush Mount For 36" To 55" Screens
- Universal Brackets Easily Hook Onto Wall Plate for Fast installation
- Weight Capacity: 165.35 Pounds
- Interface Size: 27.56" x 19.61"
- Distance to the Wall: 3.74" - 10.43"
- Dimensions: 30.71" X 19.61" X 10.43"

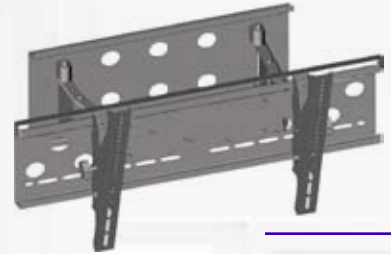

PSPSW I 1 6 S 23"-37" Flat Panel TV Articulating Wall Mount


- Universal Flat Panel Flush Mount For 23" To 37" Screens
- Universal Brackets Easily Hook Onto Wall Plate for Fast installation
- Weight Capacity: 165.34 Pounds
- Interface Size: 18.90" X 13.70"
- Distance to the Wall: 3.74" - 10.43"
- Dimensions: 20.79" X 13.70" 10.43"

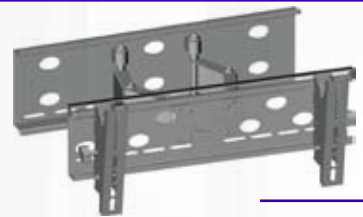

PSW I 0 I C M 36" - 65" Flat Panel Tilting TV Wall Mount Bracket

- Universal Mounts fits virtually any 36" to 65" plasma/ LCD flat Panel Screen
- One Touch tilt for effortless positioning and Adjustment of the screen
- Up to 12" of horizontal adjustment After screen is mounted
- Mounts to wood/Metal studs, concrete cinder blocks
- (Accessories included)
- Universal brackets easily hook onto wall Plate for fast installation
- Weight Capacity: 132.27lbs (60kg)
- Interface size: 31" x 24"
- Distance to the wall 3.2"
- Viewing adjustment: 5"-15"

NEW FOR 2011



PSW I 1 I 31"-55" Flat Panel Articulating TV Wall Mount

- Universal Design Fits Virtually Any 32"-55" Display
- Universal Brackets Easily Hook onto the wall Plate for Fast Installation
- Built-In Bubble Level in Wall Plate
- Max Load: 150 Lbs
- 0-12" Tilt Adjustment

NEW FOR 2011



PSW I 1 2 36" - 55" Flat Panel TV Flush Wall Mount Brackets

- Solid heavy gauge steel construction
- Durable powder coated finish (Black or Silver)
- Includes complete hardware kit for easy installation
- Weight Capacity: 165lbs (75kg)
- Interface size: 27.5" x 20"
- Distance to the wall: 2"






Product Line

PSW 113

32"-55" Flat Panel Articulating TV Wall Mount


- Universal Design Fit Virtually Any 32"-55" Display
- Brackets Easily hook onto Wall Plate for Fast Installation
- Built-In Bubble Level in Wall Plate
- MAX Load: 150 Lbs
- 0-12 ° Tilt Adjustment



PSW 16MFI

36" To 65" Flat Panel TV Wall Mount

- Universal Mounts Fits Virtually Any 36" To 65" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Built In Leveler System
- Max Load 132 Lbs
- Vesa: 31.5 X 23.6"
- Distance To The Wall: 1"
- Product Dimension: 33.3" X 24.8" X 1"
- Package Dimension: 34.8" X 7.1" X 8.9"
- Gross/Net Weight: 42.5/33.7 lbs



PSW 17ETI

36" to 65" Flat Panel Tilted TV Wall Mount

- Universal Mounts Fits Virtually Any 36" To 65" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Tilt And Leveling Adjustments
- Built In Leveler System
- Max Load 132lbs
- Vesa: 31.5 X 23.6"
- Distance To The Wall: 3.3"
- Product Dimension: 33.3" X 24.8" X 3"
- Package Dimension: 34.8" X 12.6" X 9.1"
- Gross/Net Weight: 39.7/30.9 lbs



PSW 185FI

23" to 42" Flat Panel TV Wall Mount

- Universal Mounts Fits Virtually Any 23" To 42" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Built In Leveler System
- Max Load 132lbs
- Vesa: 19.7 x 15.7"
- Distance To The Wall: 1"
- Product Dimension: 21.5" X 16.9" X 1"
- Package Dimension: 23.2" X 11.2" X 9.1"
- Gross/Net Weight: 38.4/26.5 lbs



PSW 195TI

23" To 42" Flat Panel Tilt TV Wall Mount

- Universal Mounts Fits Virtually Any 23" To 42" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Tilt And Leveling Adjustments
- Built In Leveler System
- Max Load 132 lbs
- Vesa: 19.7 X 15.7"
- Distance To The Wall: 3.3"
- Product Dimension: 21.5" X 16.9" X 3.3"
- Package Dimension: 23.2" X 16.7" X 9"
- Gross/Net Weight: 39.7/30.9 lbs



PSW 127LT


42" to 63" Flat Panel Tilted TV Wall Mount

- Universal mounts fits virtually any 42" To 63" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Tilt and leveling adjustments
- Built in leveler system
- Max load: 132lbs
- Vesa: 31.5"x19.7"
- Distance to the wall: 1.3"
- Product dimension: 33.6"x20.9"x1.3"
- Package dimension: 36.3"x10.2"x8.7" (per master carton)
- Gross/Net weight: 36.9/29.9 lbs (per master carton)




PSW128ST 23" To 37" Ultra Thin Flat Panel Flush/Tilt TV Wall Mount

- Universal Mounts Fits Virtually Any 23" To 37" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Max Load 77 Lbs
- Vesa: 400 X 400
- Distance To The Wall: 1.45"
- Product Dimension: 17.87" X 16.93" X 1.3"
- Package Dimension: 19.6" 9.57" X 12.8"
- Gross/ Net Weight: 43.6/ 41.4 Lbs



PSW129MT 32" to 50" Flat Panel TV Flush/Tilt Wall Mount

- Universal mounts fits virtually any 32" To 50" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Built in leveler system
- Max load: 110lbs
- Vesa: 23.62"x15.75"
- Distance to the wall: 1.3"
- Product dimension: 25.74"x16.93"x1.3"
- Package dimension: 28.5"x10.4"x12.8"
- Gross/Net weight:47.5/36.9 lbs

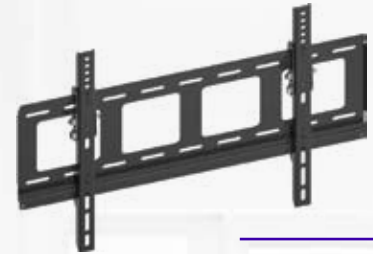


PSW228 23" TO 36" Flat Panel TV Tilting Wall Mount

- universal Mounts fits Virtually any 23" to 36" Plasma or LCD Flat Panel Screen
- Universal Brackets Easily Hook onto The Wall Plate For Fast Installation
- Tilt and Leveling Adjustments
- Max load: 22-66 Lbs
- Vesa: 19.7" x 15.7"
- Distance to the Wall" 3.3"
- Product Dimension: 21.5" x 16.9" x 3.3"
- Package Dimension: 22.6" x 8 x 3.5"
- Gross/Net Weight: 9.9/ 7.9 Lbs




PSW229 36" TO 65" Flat Panel TV Tilting Wall Mount

- universal Mounts fits Virtually any 36" to 65" Plasma or LCD Flat Panel Screen
- Universal Brackets Easily Hook onto The Wall Plate For Fast Installation
- Tilt and Leveling Adjustments
- Max load: 55-121 Lbs
- Vesa: 31.5" x 23.6"-31.5" x 15.7"
- Distance to the Wall 3.3"
- Product Dimension: 33.3" x 24.8" x 3.3"
- Package Dimension: 34.4" x 8.1" x 3.6"
- Gross/Net Weight: 14.3/ 11.6 Lbs

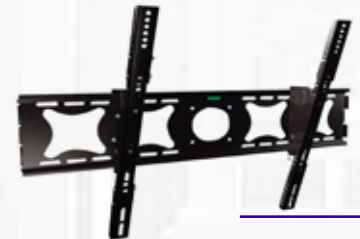

PSW320MF Universal Flat Panel Tv Wall Mount Flush for 42" to 65" Screens

- Universal Flat Panel Flush Mount for Screens
- Universal Brackets easily hook onto Installation
- Leveling Adjustments
- Max Load: 165 Lbs
- Vesa: 31.5" x 23.6"
- Distance to the Wall: 1.0
- Product Dimension: 37.6" x 24.8" x 1.0"
- Package Dimension: 38.5" x 8.5" x 2.0"
- Gross/ Net Weight: 8.2/5.4 Lbs

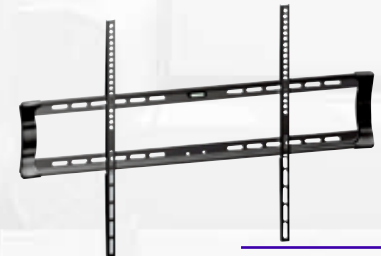

PSW321MT Universal Tilting Flat Panel Tv Wall Mount Flush for 42" to 65" Screens

- Universal Tilting Flat Panel Flush Mount for 42" to 65" Screens
- Universal Brackets easily hook onto the Wall Plate for fast Installation
- Leveling Adjustments
- Max Load: 165 Lbs
- Vesa: 31.5" x 23.6"
- Distance to the Wall: 3.3"
- Product Dimension: 37.6" x 24.8" x 3.3"
- Package Dimension: 38.5" x 8.5" x 3.6"
- Gross/ Net Weight: 12.3/9.4 Lb






Product Line

PSW3225F Universal Flat Pane Tv Wall Mount Flush for 26" to 42" Screens

- Universal Tilting Flat Panel Flush Mount for 26" to 42" Screens
- Universal Brackets easily hook onto the Wall Plate for fast Installation
- Leveling Adjustments
- Max Load: 132 Lbs


- Vesa: 19.7" x 15.8"
- Distance to the Wall: 3.3"
- Product Dimension: 25.8" x 16.9" x 3.3"
- Package Dimension: 26.8" x 8.5" x 2.0"
- Gross/ Net Weight: 9.9/7.3 Lbs

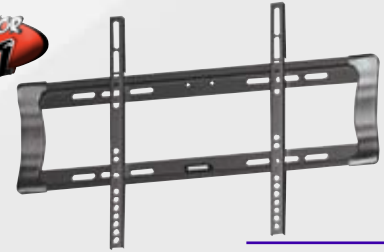

PSW3235T Universal Tilting Flat Tv Panel Flush for Wall Mount 26" to 42" Screens

- Universal Tilting Flat Panel Flush Mount Screens
- Universal Brackets easily hook onto the Installation
- Leveling Adjustments
- Max Load: 132 Lbs
- Vesa: 19.7" x 15.8"

- Distance to the Wall: 3.3"
- Product Dimension: 25.8" x 16.9" x 3.3"
- Package Dimension: 26.8" x 8.5" x 2.0"
- Gross/ Net Weight: 9.9/7.3 Lbs

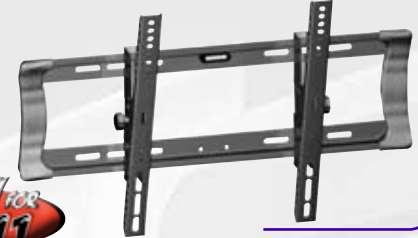

PSW328T 10" To 32" Flat Panel Tilted TV Wall Mount

- Universal Mounts Fits Virtually Any 10" To 32" Plasma Or LCD Flat Panel Screen
- Universal Wishbone Tilted Mount
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Portrait Or Landscape Viewing
- Built In Leveler System

- Max Load: 77lbs
- Vesa: 7.9 X 7.9"
- Distance To The Wall: 3.3"
- Product Dimension: 13.6" X 9.1" X 3.3"
- Package Dimension: 28.5" X 15.4" X 9.3"
- Gross/Net Weight: 49.6/47.4 lbs



PSW329F 10" To 32" Flat Panel Tv Wall Mount

- Universal Mounts Fits Virtually Any 10" To 32" Plasma Or Lcd Flat Panel Screen
- Universal Wishbone Mount
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Portrait Or Landscape Viewing
- Built In Leveler System


- Max Load: 77lbs
- Vesa: 7.9 X 7.9"
- Distance To The Wall: 1"
- Product Dimension: 13.6" X 10.7" X 1"
- Package Dimension: 18.1" X 14.8" X 9.3"
- Gross/Net Weight: 25.4/23.1 lbs



PSW445T 10" to 32" Flat Panel Tilted TV Wall Mount

- Universal Mounts Fits Virtually Any 10" To 32" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Tilt And Leveling Adjustments
- Built In Leveler System


- Max Load: 77.2lbs
- Vesa: 7.87 x 7.87"
- Distance To The Wall: 2.7"
- Product Dimension: 9.4" X 9.1" X 2.7"
- Package Dimension: 18.3" X 10.6" X 9.1"
- Gross/Net Weight: 35.3/26.5 lbs

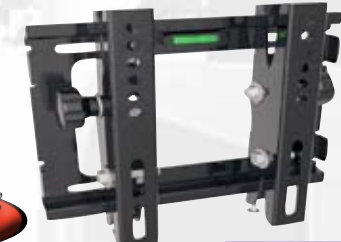

PSW446F 10" To 32" Flat Panel Tv Wall Mount

- Universal Mounts Fits Virtually Any 10" To 32" Plasma Or Lcd Flat Panel Screen
- Universal Wishbone Fixed Mount
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Portrait Or Landscape Viewing
- Built In Leveler System

- Max Load: 77lbs
- Vesa: 7.9 X 7.9"
- Distance To The Wall: 1"
- Product Dimension: 13.6" X 10.7" X 1"
- Package Dimension: 18.1" X 14.8" X 9.3"
- Gross/Net Weight: 25.4/23.1 lbs

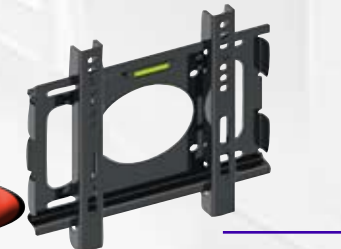

PSW448F 23" to 36" Flat Panel TV Wall Mount

- Universal Mounts Fits Virtually Any 23" To 36" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Built In Leveler System
- Max Load: 132lbs
- Vesa: 15.7x11.8"
- Distance To The Wall: 1"
- Product Dimension: 17.3" X 13" X 1"
- Package Dimension: 15" X 18.7" X 8.9"
- Gross/Net Weight: 48.5/35 lbs



PSW449T 23" to 36" Flat Panel Tilted TV Wall Mount

- Universal Mounts Fits Virtually Any 23" To 36" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation Tilt And Leveling Adjustments
- Built In Leveler System
- Max Load: 132lbs
- Vesa: 15.7 X 11.8"
- Distance To The Wall: 2.76"
- Product Dimension: 17.3" X 13" X 2.76"
- Package Dimension: 20.9" X 18.5" X 9.1"
- Gross/Net Weight: 43/33 lbs



PSW501SF 26" to 42" Flat Panel TV Wall Mount

- Universal Mounts Fits Virtually Any 26" To 42" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Built In Leveler System
- Max Load 110.2lbs
- Vesa: 19.7 X 15.8"
- Distance To The Wall: 2.2"
- Product Dimension: 24.4" X 16.9" X 2.2"
- Package Dimension: 33.9" X 7.5" X 10"
- Gross/Net Weight: 37.5/29.9lbs



PSW502MF 36" To 55" Flat Panel TV Wall Mount

- Universal Mounts Fits Virtually Any 36" To 55" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Built In Leveler System
- Max Load 176lbs
- Vesa: 27.6" X 19.7"
- Distance To The Wall: 2.2"
- Product Dimension: 32.3" X 20.9" X 2.2"
- Package Dimension: 35" X 11" X 10"
- Gross/Net Weight: 42.3/35.3lbs



PSW503ST 26" To 42" Flat Panel Tilted TV Wall Mount

- Universal Mounts Fits Virtually Any 26" To 42" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Tilt And Leveling Adjustments
- Built In Leveler System
- Max Load 110lbs
- Vesa: 19.7 X 15.8"
- Distance To The Wall: 3.1"
- Product Dimension: 24.4" X 16.9" X 3.1"
- Package Dimension: 27.2" X 13.4" X 10"
- Gross/Net Weight: 45.9/38.8 lbs



PSW504MT 36" to 55" Flat Panel Tilted TV Wall Mount

- Universal Mounts Fits Virtually Any 36" To 55" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Tilt And Leveling Adjustments
- Built In Leveler System
- Max Load 176lbs
- Vesa: 27.6x19.7"
- Distance To The Wall: 3.1"
- Product Dimension: 32.3" X 20.9" X 3.1"
- Package Dimension: 35" X 13.4" X 10"
- Gross/Net Weight: 45.9/38.8 lbs





Product Line

PSW578UT

23" To 37" Flat Panel Ultra-Thin TV Wall Mount

- Universaly Mount Fits Virtually any 23" To 37" Plasma or LCD Flat Panel Screen
- Universal Brackets easily hook's onto the wall Plate for fast Installation
- Max Load: 77.21lbs
- Vesa: 15.7" x 11.8"
- Distance to the wall: 0.6"
- Product Dimension: 15.7" x 13.0" x 0.6"
- Package Dimension: 19.2" x 8.2" x 1.8"
- Gross/Net weight: 4.6/ 4.0 lbs



PSW588UT

32" To 50" Flat Panel Ultra-Thin TV Wall Mount

- Universaly Mount Fits Virtually any 32" To 50" Plasma or LCD Flat Panel Screen
- Universal Brackets easily hook's onto the wall Plate for fast Installation
- Max Load: 99lbs
- Vesa: 23.6" x 15.7"
- Distance to the wall: 0.6"
- Product Dimension: 23.6" x 16.9" x 0.6"
- Package Dimension: 27.3" x 8.2" x 1.8"
- Gross/Net weight: 6.4/ 5.3 lbs



PSW598UT

42" To 65" Flat Panel Ultra-Thin TV Wall Mount

- Universaly Mount Fits Virtually any 42" To 65" Plasma or LCD Flat Panel Screen
- Universal Brackets easily hook's onto the wall Plate for fast Installation
- Max Load: 132lbs
- Vesa: 31.5" x 23.6"
- Distance to the wall: 0.7"
- Product Dimension: 31.5" x 24.8" x 0.7"
- Package Dimension: 35.2" x 8.2" x 1.8"
- Gross/Net weight: 8.58/ 7.3 lbs



PSW601AT

32" to 50" Flat Panel Articulating TV Wall Mount

- Universal mounts fits virtually any 32" To 50" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Tilt and leveling adjustments
- Built in leveler system
- Max load: 132lbs
- Vesa: 23.6"x15.7"
- Distance to the wall: 5.8"-20.3"
- Product dimension: 28.3"x16.9"x5.8"
- Package dimension: 30.9"x12.4"x12.6"
- Gross/Net weight:59.4/55 lbs



PSW602AT

42"to 65" Flat Panel Articulating TV Wall Mount

- Universal mounts fits virtually any 42" To 65" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Tilt and leveling adjustments
- Built in leveler system
- Max load: 132lbs
- Vesa: 31.50"x19.7"
- Distance to the wall: 5.83"-20.28"
- Product dimension: 36.22 "x20.87"x5.83"
- Package dimension: 39.2"x12.6"x12.6"
- Gross/Net weight:71.1/67.3lbs



PSW701F

23"- 50" Flat Panel Flush Wall Mount With Built In Level

- 23" to 50" Flat Panel Flush Mount
- Adjustable Pivot Points Provide Tension Control
- Pre-Assembled for Quik Intallation
- All Necessary Hardware Included
- Max Load: 165 Pounds
- Vesa: 23.6" x 15.7"
- Distance to the Wall: 1.2"
- Gross/Net Weight: 8.8/5.5 Pounds
- Dimensions: 26.4" x 16.9" x 1.2"



PSW710S

14" to 37" Flat Panel Articulating TV Wall Mount

- Universal mounts fits virtually any 14" to 37" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Max load: 55 lbs
- Vesa: 7.8" X 7.8" / 7.8" X 3.9"
- Distance to the wall: 2.8" - 15.6"
- Product dimension: 9.8" x 9.8" x 2.8"
- Package dimension: 12" x 10.6" x 3.1"
- Gross/Net weight: 7.26/5.94 lbs



PSW730S

32" to 42" Flat Panel Articulating TV Wall Mount

- Universal mounts fits virtually any 32" to 42" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Tilt and leveling adjustments
- Built in leveler system
- Max load: 77lbs
- Vesa: 15.7" x 15.7"
- Distance to the wall: 5.19" - 17.3"
- Product dimension: 20.4" x 15.7" x 5.19"
- Package dimension: 23.8" x 9.3" x 15.4"
- Gross/Net weight: 33.4/31.2 lbs



PSW740L

32" to 50" Flat Panel Articulating TV Wall Mount


- Universal mounts fits virtually any 32" to 50" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Tilt and leveling adjustments
- Built in leveler system
- Max load: 132lbs
- Vesa: 23.6" x 15.7"
- Distance to the wall: 5.31" - 21.6"
- Product dimension: 28.3" x 16.9" x 5.31"
- Package dimension: 31.3" x 14.4" x 12"
- Gross/Net weight: 54.1/49.7 lbs



PSW770

23" to 42" Flat Panel Steel Solid Articulating TV Wall Mount


- Universal mounts fits virtually any 23" to 42" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Max load: 77lbs
- Vesa: 3.9" x 3.9" 15.7" x 15.7"
- Distance to the wall: 3.90" - 17.91"
- Product dimension: 18.3" x 16.9" x 3.9"
- Package dimension: 21.3" x 10.4" x 10.2"
- Gross/Net weight: 31.9/30.36lbs

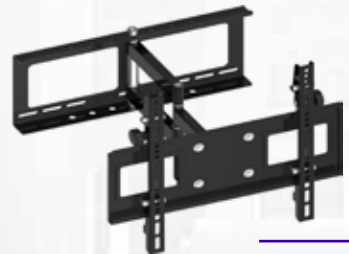

PSW771

32" to 50" Flat Panel Steel Solid Articulating TV Wall Mount


- Universal mounts fits virtually any 32" to 50" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Max load: 88lbs
- Vesa: 3.9" x 3.9" 23.6" x 15.7"
- Distance to the wall: 3.90" - 17.91"
- Product dimension: 26.1" x 16.9" x 3.9"
- Package dimension: 29.1" x 10.4" x 10.2"
- Gross/Net weight: 37.4/35.2lbs

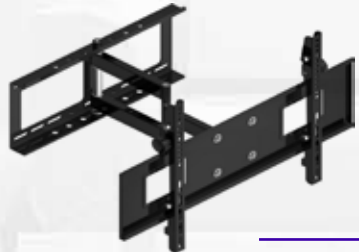

PSW772

42" to 65" Flat Panel Steel Solid Articulating TV Wall Mount

- Universal mounts fits virtually any 42" to 65" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Max load: 110lbs
- Vesa: 3.9" x 3.9" 31.5" x 19.7"
- Distance to the wall: 3.90" - 17.91"
- Product dimension: 34.0" x 20.9" x 3.9"
- Package dimension: 36.4" x 10.2" x 11.6"
- Gross/Net weight: 52.8/50.6lbs

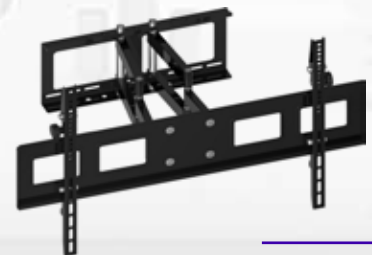



Product Line

PSW801T

23" - 50" Flat Panel Tilting Wall Mount With Built In Level


- 23" to 50" Flat Panel Tilted Mount
- Universal Brackets Easily hook onto the Wall Plate for Fast Installation
- Tilt and Leveling Adjustments
- Max Load: 165 Pounds
- Vesa: 23.6" x 15.7"
- Distance To The Wall: 2.8"
- Gross/Net Weight: 12.3/9.0 Pounds
- Dimensions: 26.4" x 19.6" x 2.76"



PSW802T

36" - 70" Flat Panel Tilting Wall Mount With Built In Level

- 36" to 70" Flat Panel Tilted Mount
- Universal Brackets Easily Hook onto the Wall Plate for Fast Installation
- Tilt and Leveling Adjustment
- Max Load: 165 Pounds
- Vesa: 35.4" x 23.6"
- Gross/Net Weight: 79.37/74.96 Pounds
- Dimensions: 38.19" x 25.59" x 2.76"

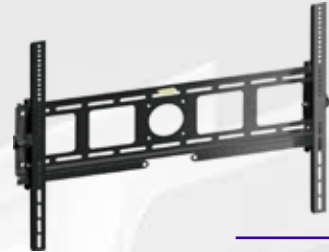

PSW901AT

23" to 50" Flat Panel Articulating Wall Mount

- 23" to 50" Flat Panel Articulating mount
- Universal brackets Easily Hook onto the Wall Plate for Fast installation
- Portrait or Landscape Viewing
- Max Load: 165 Pounds
- Vesa: 23.6" x 15.7"
- Distance To The Wall: 23"
- Gross/Net Weight: 25.4/20.9 Pounds
- Dimensions: 26.4" x 19.6" x 4.9"



PSW902AT

36" to 70" Flat Panel Articulating Wall Mount


- 36" to 70" Flat Panel Articulating Wall Mount
- Universal Brackets Easily Hook onto the Wall Plate for Fast Installation
- Portrait or Landscape Viewing
- Max Load: 165 Pounds
- Vesa: 35.4" x 23.6"
- Gross/Net Weight: 77.16/72.75 Pounds
- Distance to the Wall: 4.7"-25.6"
- Dimensions: 38.19" x 25.59" x 25.59"



PSW974S

26" To 42" Flat Panel Articulating TV Wall Mount

- Universal Mounts Fits Virtually Any 26" To 42" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Tilt and Leveling Adjustments
- Built In Leveler System
- Max Load 88lbs
- Vesa: 15.7 X 11.8"
- Distance To The Wall: 4.9-14.8"
- Product Dimension: 17.3" X 13.2" X 4.9"
- Package Dimension: 20.1" X 19.7" X 8.5"
- Gross/Net Weight: 39.7/37.5lbs

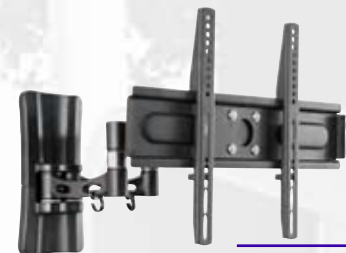

PSW976S


32" To 50" Flat Panel Articulating TV Wall Mount

- Universal Mounts Fits Virtually Any 32" To 50" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto the Wall Plate For Fast Installation
- Tilt and Leveling Adjustments Built In Leveler System
- Max Load 132.2lbs
- Vesa: 23.6 X 15.8"
- Distance To The Wall: 5.7-15.8"
- Product Dimension: 28.3" X 16.9" X 1 5.8"
- Package Dimension: 30.3" X 12" X 9.8"
- Gross/Net Weight: 48.5/44 lbs



PSW977L 42" to 65" Flat Panel Articulating TV Wall Mount

- Universal Mounts Fits Virtually Any 42" To 65" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Tilt And Leveling Adjustments
- Built In Leveler System
- Max Load 176 Lbs
- Vesa: 31.5 X 19.7"
- Distance To The Wall: 6.3-22.3"
- Product Dimension: 36.2" X 20.9" X 32.3"
- Package Dimension: 38" X 14.1" X 6.5"
- Gross/Net Weight: 46.3/42 lbs

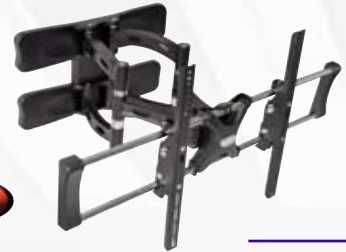


PSWLB273 Up to 32" Cantilever TV Wall Mount

- Universal Mounts Fits LCD Display up to 32"
- Built-In Leveler System
- VESA Standard: 50 x 50 mm, 75 x 75mm, 100 x 100mm
- MAX Load: 44 Lbs
- 180 ° Swivel Left and Right
- 20 ° up and down




PSWLB371 10-24" Universal Dual Arm Swivel/Articulating LCD TV Wall Mount

- Universal Flat TV Mount For 10" To 24" Screens
- Universal Brackets Easily Hook Onto Wall Plate
- Adjustable Pivot Points Provides Tension Control
- Pre-assembled For Quick Installation
- Weight Capacity 50Lbs
- Interface Size 4" x 4"
- Distance to the Wall: 3.5" -16"
- Dimensions: 4.7" X 4.7" X 3.5"

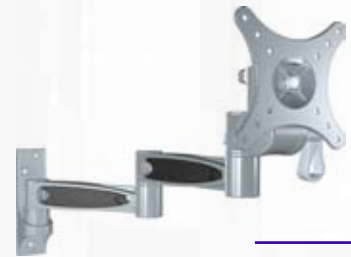

PSWLB372 10"- 24" Single Arm Flat Panel TV Adjustable Full Motion Arm Wall Mount

- Universal Flat Panel Flush Mount For 10" To 24" Screens
- Universal Brackets Easily Hook Onto Wall Plate for Fast installation
- Distance to the Wall: 3.14" - 9.84"
- Dimensions: 9.8" X 7.09" X 3.94"

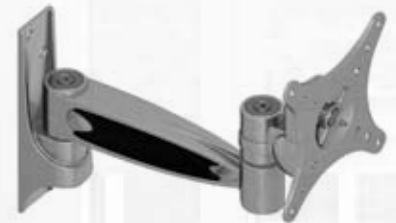

PSWLB373 10"- 24" Flat Panel Articulating Wall Mount

- Universal Flat Panel Flush Mount For 10" To 24" Screens
- 90o Swivel Left Right
- -5o-20o Vertical Angle Adjustable
- Universal Brackets Easily Hook Onto Wall Plate for Fast installation
- Weight Capacity: 33.07 Pounds
- Interface Size: 3.94" X 3.94"
- Distance to the Wall: 3.54"
- Dimensions: 8.66" X 4.72" X 3.54"



PSWLB374 10"- 32" Flat Panel TV Dual Arm Cantilever Wall Mount

- Universal Flat Panel Flush Mount For 10" To 32" Screens
- Universal Brackets Easily Hook Onto Wall Plate for Fast installation
- Weight Capacity: 55.11 Pounds
- Distance to the Wall: 4" -16.7"
- Dimensions: 16.73" X 13.78" X 4.33"





Product Line

PSWLE07

23"-46" Ultra Thin Low Profile LED/LCD TV Wall Mount

- Easy installation mounts for LED and LCD TV's
- Built in leveler system
- Steel construction keeps your television safe And secure
- Space-saving design keeps your TV close to the Wall
- Max load:88 lbs
- Vesa: 15.75" x 15.75" and 3.94"x3.94"
- Distance to the wall: 0.79"
- Product dimension: 18.31"x2.28"x0.79"
- Package dimension: 27.17"x10.83"x5.51"
- Gross/Net weight: 32.8/31.5 lbs



PSWLE08

37"-65" Super Ultra Thin Low Profile LED/LCD TV Tall Mount

- Easy installation mounts for LED or LCD TV
- Built in leveler system
- Steel construction keeps your television safe And secure
- Space-saving design keeps your TV close to the Wall
- Max load:132 lbs
- Vesa: 31.5" x 23.63" and 7.88"x3.94"
- Distance to the wall: 0.79"
- Product dimension: 35.28"x2.28"x0.79"
- Package dimension: 42.92"x8.86"x5.51"
- Gross/Net weight: 40.9/38.7 lbs



PSWLE54

23"-46" Flat Panel LCD TV Wall Mount


- Universal mounts fits virtually any 23" To 46" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Steel construction keeps your television safe And secure
- Built in leveler system
- Max load:66 lbs
- Vesa: 15.75" x 15.75"
- Distance to the wall: 0.98"
- Product dimension: 17.52"x16.93"x0.98"
- Package dimension: 19.09"x5.12"x12.21"
- Gross/Net weight: 36.3 / 34.9lbs



PSWLE55

36"-55" Flat Panel LCD TV Wall Mount

- Universal mounts fits virtually any 36" To 55" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Steel construction keeps your television safe And secure
- Built in leveler system
- Max load:77 lbs
- Vesa: 23.63" x 15.75"
- Distance to the wall: 0.98"
- Product dimension: 26.18"x16.93"x0.98"
- Package dimension: 26.58" x 5.12"x12.21"
- Gross/Net weight: 41.4 / 39.9lbs



PSWLE56

23"-46" Flat Panel LCD Tilt TV Wall Mount

- Universal mounts fits virtually any 23" To 46" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Steel construction keeps your television safe And secure
- Built in leveler system
- Max load:66 lbs
- Vesa: 15.75" x 15.75"
- Distance to the wall: 2.05"
- Product dimension: 17.52"x16.93"x2.05"
- Package dimension: 19.09"x5.71"x19.14"
- Gross/Net weight: 41.5 / 39.78lbs



PSWLE57

36"-55" Flat Panel LCD Tilt TV Wall Mount

- Universal mounts fits virtually any 36" To 55" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Built in leveler system
- Steel construction keeps your television safe And secure
- Max load:77 lbs
- Vesa: 23.63" x 15.75"
- Distance to the wall: 2.05"
- Product dimension: 26.18"x16.93"x2.05"
- Package dimension: 26.58" x 5.71"x14.6"
- Gross/Net weight: 36.3 / 34.8lbs



PSWLE58

23"-42" Flat Panel Low Profile Tilt LED/LCD TV Wall Mount

- Extremely ultra-thin tilt mounts for LED TV
- Steel construction keeps your television safe And secure
- Space-saving design keeps your TV close to the Wall
- Max load:44 lbs
- Vesa: 15.75" × 15.75" and 3.94"×3.94"
- Distance to the wall: 1.10"
- Product dimension: 21.46"×16.93"×1.10"
- Package dimension: 24.02"×8.27"×10.63"
- Gross/Net weight: 32.7 / 31.5lbs



PSWLE59

32"-55" Flat Panel Low Profile Tilt LED/LCD TV Wall Mount

- Extremely ultra-thin tilt mounts for LED or LCD TV
- Steel construction keeps your television safe And secure
- Space-saving design keeps your TV close to the Wall
- Max load:66 lbs
- Vesa: 23.63"× 19.69" and 3.94"×3.94"
- Distance to the wall:1.10"
- Product dimension: 29.33"×20.87"×1.10"
- Package dimension: 31.89"×8.27"×10.36"
- Gross/Net weight: 40.4 / 39.1lbs



PSWLE81

26"-42" Flat Panel Low Profile Articulating LED/LCD TV Wall Mount

- Extremely low profile articulating mounts for LED or LCD TV
- Only 38mm(1.49")to the wall when folded up
- Steel construction keeps your television safe And secure
- Space-saving design keeps your TV close to the Wall
- TV view up to 90 degree perpendicular to the Wall
- Built in leveler system
- Max load: 55 lbs
- Vesa: 15.75" × 15.75" and 7.88"×3.94"
- Distance to the wall: 1.49-21.06"
- Product dimension: 18.82"×15.75"×1.49"
- Package dimension: 21.97"×8.27"×14.49"
- Gross/Net weight: 35.9/34.3 lbs



PSWLE82

37"-55" Flat Panel Low Profile Articulating LED/LCD TV Wall Mount


- Extremely low profile articulating mounts for LED or LCD TV
- Only 41mm(1.61")to the wall when folded up
- Steel construction keeps your television safe And secure
- Space-saving design keeps your TV close to the Wall
- TV view up to 83 degree nearly perpendicular To the wall
- Built in leveler system
- Max load: 77 lbs
- Vesa: 27.56" × 19.69" and 7.88"×3.94"
- Distance to the wall: 1.61-24.61"
- Product dimension: 31.26"×19.69"×1.61"
- Package dimension:34.85"×6.10"×14.29"
- Gross/Net weight: 37.6/35.8 lbs



PSXPT003M

36"- 55" Flat Panel TV Tilting Wall Mount

- Universal Mounts fits virtually any 36" to 55" plasma/ LCD flat Panel Screen
- One Touch tilt for effortless positioning And adjustment of the screen
- Up to 12" of horizontal adjustment After screen is mounted
- Mounts to wood/Metal studs, concrete cinder blocks
- Universal brackets easily hook onto wall Plate for fast installation
- Weight Capacity: 165lbs (75kg)
- Interface size: 28" x 19"
- Distance to the wall 2.95"
- Viewing adjustment: 5°-15°

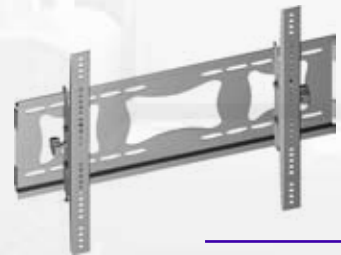

PSXPT006

14"- 37" Flat Panel TV Tilting Wall Mount

- Universal Flat Panel Flush Mount For 14" To 37" Screens
- Universal Brackets Easily Hook Onto Wall Plate for Fast installation
- Weight Capacity: 77.16 Pounds
- Interface Size: 9.84" x 11.81"
- Dimensions:13.39" X 11.26" X 2.36"






Product Line

PWL8121

10" - 24" Dual Arm Flat Panel TV With adjustable Wall Mount


- Fits VESA 75/100 Mounting Hole Patterns
- Adjustable Pivot Points Provide Tension Control
- Extensive Tilt Range of 30°
- Screen Swivels up to 180°
- All Necessary Hardware Included
- Pre-assembled for quick Installation
- Weight Capacity: 15Kg (33Lbs)
- Interface Size: 4" x 4"
- Distance to the Wall: 2.76" – 14.25"

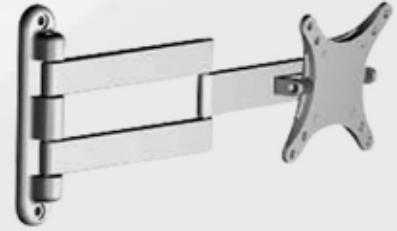

PWL8151

14" To 37" Flat Panel Articulating TV Wall Mount

- Universaly Mount Fits Virtually any 14" To 37" Plasma or LCD Flat Panel Screen
- Universal Brackets easily hook's onto the wall Plate for fast Installation
- Max Load: 77lbs
- Vesa: 7.8" x 7.8"
- Distance to the wall: 3.3"-19.7"
- Product Dimension: 12.2" x 4.7" x 3.3"
- Package Dimension: 1.6" x 1.2" x 3.9"
- Gross/Net weight: 10.45/ 9.35 lbs

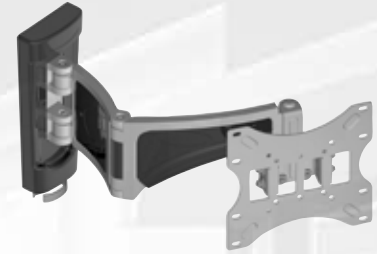

PWL8241

10" to 24" Dual arm flat panel TV adjustable cantilever wall mount

- Universal mounts fits virtually any 10" To 24" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Built in leveler system
- Max load: 33lbs
- Vesa: 3.94"x3.94"
- Distance to the wall: 3.1"-13.0"
- Product dimension: 4.52"x4.92"x13.0"
- Package dimension: 17.7"x13.2"x13.2"
- Gross/Net weight:39.7/32.7 lbs



PWL8242

10" To 24" Single Arm Flat Panel TV Adjustable Full Motion Arm Wall Mount

- Universal mounts fits virtually any 10" To 24" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Built in leveler system
- Max load: 33lbs
- Vesa: 3.94"x3.94"
- Distance to the wall: 3.1"-7.48"
- Product dimension: 17.87"x16.93"x13.3"
- Package dimension: 22.6"x8.9"x10.4"
- Gross/Net weight:39.7/29.5 lbs



PWL8243

10" to 24" Flat Panel Articulating TV Wall Mount

- Universal mounts fits virtually any 10" To 24" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Built in leveler system
- Max load: 33lbs
- Vesa: 3.94"x3.94"
- Distance to the wall: 3.1"
- Product dimension: 4.53"x4.92"x3.07"
- Package dimension: 28.3"x13.3"x10.8"
- Gross/Net weight:48.5/36.6 lbs



PXPF201C 23" to 47" Ultra Thin Fixed LED/LCD/PDP Mount

- Universal mounts fits virtually any 23" To 47" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Max load: 77lbs
- Vesa: 3.94"x3.94" 15.7"x15.7"
- Distance to the wall: 1.1"
- Product dimension: 18.1"x16.9"x1.1"
- Package dimension: 20.7"x17.1"x9.8"
- Gross/Net weight:38.5/36.3lbs




PXPF202C 26" to 55" Ultra Thin Fixed LED/LCD/PDP Mount

- Universal mounts fits virtually any 26" To 55" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Max load: 99lbs
- Vesa: 3.94"x3.94" 23.6"x15.7"
- Distance to the wall: 1.1"
- Product dimension: 26.0"x16.9"x1.1"
- Package dimension: 28.3"x17.1"x9.8"
- Gross/Net weight:45.3/43.1lbs



PXPT201 23" to 46" Ultra Thin Tilt LED/LCD/PDP Mount

- Universal mounts fits virtually any 23" To 46" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Max load: 77lbs
- Vesa: 3.94"x3.94" 15.7"x15.7"
- Distance to the wall: 1.5"
- Product dimension: 18.1"x16.9"x1.5"
- Package dimension: 19.7"x10.2"x15.0"
- Gross/Net weight:30.1/27.9lbs



PXPT202 26" to 55" Ultra Thin Tilt LED/LCD/PDP Mount

- Universal mounts fits virtually any 26" To 55" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Max load: 99lbs
- Vesa: 3.94"x3.94" 23.6"x15.7"
- Distance to the wall: 1.5"
- Product dimension: 26.0"x16.9"x1.5"
- Package dimension: 27.6"x10.2"x15.0"
- Gross/Net weight:34.1/31.9lbs



PXPT203 37" to 65" Ultra Thin Tilt LED/LCD/PDP Mount

- Universal mounts fits virtually any 37" To 65" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Max load: 99lbs
- Vesa: 3.94"x3.94" 31.5"x19.7"
- Distance to the wall: 1.5"
- Product dimension: 33.8"x20.9"x1.5"
- Package dimension: 35.4"x10.2"x15.0"
- Gross/Net weight:40.7/38.5lbs





Product Line

PTVC32 I

LCD TV Cabinet Dual Channel Home Theater System W/ iPod Docking Station & USB Fits Up to 32" Monitor

- 2 Channel Home Theater System
- LCD TV Cabinet Stand Up To 32"
- Ipod Dock Station And USB Function
- Built-in 500 Watt Amplifier
- 2 Microphone Input
- Blue Led Display Screen For Pre/Next/Stop Pause/Play/Song/Time
- Speaker Impedance: 8 ohm

- Built-in Dual 8" Woofer
- Built-in Dual 3" Midrange
- Built-in Dual 1" Tweeter
- Wireless IR Remote Control Included
- Built-In Storage Drawer
- 110v/220v Switchable Power Source
- Dimensions: 32.3"W x 16.9"D x 26"H



PTVC42 I

LCD TV Cabinet Dual Channel Home Theater System w/ iPod Docking Station & USB Fits Up to 42" Monitor

- LCD TV Cabinet Stand Fits Up To 42"
- Ipod Dock Station And USB Function
- 2 Microphone Input
- Power:500 Watts
- Blue Led Display Screen For Pre/Next/Stop/Pause Play/Time For Songs
- Speaker Impedance: 8ohm

- Built-in Dual 8" Woofer
- Built-in Dual 3" Midrange
- Built-in Dual 1" Tweeter
- Built-In storage drawer
- Wireless IR Remote Control Included
- 110v/220v Switchable Power Source
- Dimensions: 43"W x 16.9"D x 26"H



PSBM200

6-Way 300 Watt Multi-Source Wall/Shelf Mount Sound Bar w/USB, SD, MP3, FM Tuner & SRS 3D Technology

- Piano black finish painted wooden case, front Panel with blue backlight LCD display.
- 300 Watts Peak Output/ 150W RMS Output
- FM stereo radio with auto search and can Store 30 Preset stations.
- USB 2.0 host and SD/MMC connector for External moving HD, flash drive,
- SD/MMC card, can play MP3, WMA format music. Support's FAT32 file system.
- INPUT, MUTE, STANDBY, VOL+, VOL- buttons.

- CD, AUX1, AUX2, PC/MP3 INPUTS.
- RCA video input and video output to transfer your DVD video to TV set.
- 2 x 4" woofer, 4 x 3" full range speaker.
- Adopted SRS 3D technology for better sound.
- With wireless remote control.
- With integrated wall mount.
- Unit dimensions: 5.6" H x 5.6" W x 39.4"L
- Unit weight: 22.5 lbs



PSBV400

6-Way 300 Watt Multi-Source Wall/Shelf Mount Sound Bar w/USB, SD, MP3, FM Tuner & SRS 3D Technology

- Piano black finish painted wooden case, front Panel with blue backlight LCD display.
- 300 Watts Peak Output/ 150W RMS Output
- FM stereo radio with auto search And can store 30 Preset stations.
- USB 2.0 host and SD/MMC connector for external Moving HD, flash drive, SD/MMC card, can play MPEG1 (dat, mpg), MPEG2 (vob,mpg), MPEG4 (avi, divx, xvid) movies, MP3, WMA, WAV, AC3 music and JPEG/JPG photos.

- CD, AUX1, AUX2, PC/MP3 INPUTS.
- RCA video input and video output to transfer your DVD video to TV set.
- 2 x 4" woofer, 4 x 3" full range speaker.
- Adopted SRS 3D technology for better sound.
- With wireless remote control.
- With integrated wall mount.
- Unit dimensions: 5.6" H x 5.6" W x 39.4"L
- Unit weight: 22.5 lbs



PSBV800

6-Way 300 Watt Multi-Source Wall Mount/Surface Sound Enhancement Bar w/USB, SD, HD, MP3, HDMI, FM Tuner & SRS 3D Technology

- Piano black finish painted wooden case, front Panel with blue backlight LCD display.
- 300 Watts Peak Output/150 Watts RMS Output
- FM stereo radio with auto search and can store 30 Preset stations.
- Built-in High Definition media player which can play MPEG1 (dat, mpg), MPEG2 (vob, mpg, ts), MPEG4 (avi, divx, xvid), mkv, iso, ifo movies,
- MP3, WMA, AAC, OGG music and JPG/JPEG/BMP photos.
- Two USB 2.0 host and one SD/MMC connector For connecting external
- moving HDD, flash drive, SD/MMC card
- HDMI output supports up to 1920*1080i video output

- And excellent audio output.
- Wired LAN port to connect computer For network playing.
- Component video output and Composite video output.
- AV IN and video input for recording Viewing AV Signal from DVD etc.
- AUX, PC/MP3 audio inputs.
- INPUT, MUTE, STANDBY, VOL+, VOL- buttons.
- 1 x 5.25" woofer, 5 x 3" full range speaker
- Adopted SRS 3D technology for better sound.
- With wireless remote control.
- With stand and integrated wall mount.
- Unit dimensions: 8.3"H x 5.1"W x 44.1"L
- Unit weight: 25 lbs



PHDMIKT1

HDTV Audio/Video Connection Kit Compatible w/ Plasma, LCD, DLP, DVD Players

- 1@6ft AV Cable (3r-3r), Gold Plated
- 1@6ft Component Cable(3r-3r), Gold Plated
- 1@6ft Audio Cable (2r-2r), Gold Plated
- 1@6ft HDMI Cable, Gold Plated
- 1@6ft Toslink Cable
- 1@6ft S-Video Cable, Gold Plated
- 1@6ft HDMI To DVI Male Adaptor, Gold Plated
- PACKED COLOR GIFT BOX



NEW FOR 2011



PHDMIKT2

HDTV CLEANING KIT w/ 2 HDMI HIGH DEFINITION CABLES/COMPONENT VIDEO HIGH DEFINITION CABLE/OPTICAL AUDIO HIGH DEFINITION CABLE

- 2@ 6ft Gold HDMI Cable, Gold Metal Plug, With Braids
- 1@ 6ft Gold Component Cable, Gold Metal Plugs, With Braids
- 1@6ft Toslink Cable, Gold Metal Plugs, With Braids
- 1@Screen Cleaner With Clothes
- PACKED BLISTER PACKING



NEW FOR 2011

PCL101

LCD Screen & Computer Keyboard Cleaning Kit

- Cleaner Kit for LCD
- Classical Design for Cleaning Screens and Keyboards
- Brings Powerful Cleaning Effect
- Quickly Cleans Fingerprints, Oil Stains and Surface Adhesion of Dust
- Pyle Home Kit Is Your Partner for Cleaning
- One 40ML Bottle Cleaning Solution & One Cloth



NEW FOR 2011

PCL102

Screen, LCD, and Keyboard Cleaner

- Cleaner Kit for LCD
- Classical Design for Cleaning Screens and Keyboards
- Brings Powerful Cleaning Affect
- Quickly Cleans Fingerprints, Oil Stains, and Surface Adhesion of Dust
- Pylehome Kit is Your Partner for Ceaning
- One 120ML Bottle Cleaning Soutlution and One Cloth



NEW FOR 2011

PCL103

LCD Screen & Cleaning Eraser Cleaning Kit

- Cleaner Kit for LCD
- Classical Design for Cleaning | Screens and Keyboards
- Brings Powerful Cleaning Affect
- Quickly Cleans Fingerprints, Oil Stains and Surface Adhesion of Dust
- Pylehome Kit is Your Partner for Cleaning
- One 20ML Bottle of Cleaning Soutlution and One Cleaning Eraser



NEW FOR 2011

PCL104

LCD Screen & Computer Keyboard Cleaning Kit

- Cleaning Kit for LCD
- Classical Design for Cleaning Screens and Keyboards
- Brings Powerful Cleaning Affect
- Quickly and Effectively Cleans Fingerprints, Oil Stains, and Surface Adhesion of Dust
- Pylehome Kit is Your Ideal Partner for Cleaning
- One 220ML Bottle Cleaning Soutlution and One Cloth



NEW FOR 2011

PCL105

LCD Screen & Computer Keyboard 3 pc Cleaning Kit

- Cleaning Kit for LCD
- Classical Design for Cleaning Screens and Keyboards
- Brings Powerful Cleaning Affect
- Quickly Cleans Fingerprints, Oil Stains, and Surface Adhesion of Dust
- Pylehome Kit is Your Ideal Partner for Cleaning
- One 60ML Bottle of Cleaning Soutlution, One Cloth, One Brush, and One Bag



NEW FOR 2011

PCL106

LCD Screen & Computer Keyboard Cleaning Kit

- Cleaning Kit for LCD Screens
- Classical Design for Cleaning Screens and Keyboard
- Brings Powerful Cleaning Affect
- Quickly Cleans Unwanted Fingerprints, Oil Stains, and Surface Adhesion of Dust
- Pylehome Kit is Your Ideal Partner for Cleaning
- One 207ML Bottle Cleaning Soutlution and One Cloth



NEW FOR 2011

PCL107

LCD Screen & Computer Keyboard 8 pc Cleaning Kit

- Cleaning Kit for LCD Screens
- Classical Design for Cleaning Screens and Keyboards
- Brings Powerful Cleaning Affect
- Quickly Cleans Fingerprints, Oil Stains, and Surface Adhesion of Dust
- Pylehome Kit is Your Definite Partner for Cleaning
- One 35ML Bottle Cleaning Soutlution, One Dual-Sided Brush, and Five Replacement Cleaning Pads



NEW FOR 2011





Product Line

PBNC7503 Composite BNC & S-Video To VGA Converter -Wide Screen

- Composite Video Input Interface: BNC (The Model With RCA Interface Is: PBNC7504);
- Inputs: 1XComposite BNC Video, 1 X S-Video And 1 X VGA;
- Output: 1 X VGA;
- Switch Between The 3 Inputs And Output One Of Them To VGA;
- The VGA Input Is Pass Through To The VGA Output Directly Without Any Processing
- Both PAL / NTSC Are Supported
- It Supports Wide-Screen 16:9 And 16:10 LCD As Well To Cater For Wider Applications
- Optional Resolution: 800 X 600/60HZ, 800 X 600/75HZ, 1024 X 768/60HZ, 1280 X 720/60HZ, 1440X900/60HZ,1600X900/60HZ,and1680X1050/60HZ;
- Lightness, Hue, Contrast, Saturation, Color, Etc. Are Adjustable And Settings Is Auto-Saved When Power Off
- Composite Video And S-Video Are Up-Scaled To 1680 x 1050 And 3D Video-Processing Tech Is Applied To Make Output Picture Rich In Color
- More Vivid And Free From Flicker
- Product Dimension: 3.9"(L) X 2.4(W) X 1"(H)
- AC Adapter 110/220V Included



PCVHDM49 Composite Video And S-Video To HDMI Converter

- RCA Composite Video And S-Video To HDMI Converter Takes Either Composite Video Or S-Video As Input And Converts It To HDMI
- It Is With Up-Scaling And The Output Resolution Is Fixed At 720p or 1080p To Avoid Compatibility Problem;
- It Allows Older Analog Devices To Be Integrated Into Hd Home Theater System.
- Motion Compensated 3d Wavelet Video Coding Technology Is Applied To Make The Converted Picture
- Rich In Color And More Vivid
- Input Audio Is Integrated Into Hdmi Output As Well As Pass-Through To Earphone Or Sound Box; Input Video Systems - NTSC And Pal Is Automatically Detected And Adjusted.
- Product Dimension: 6.1"(L) X 3.3" (W) X 1.1"(H)
- AC Adapter 110/220V Included



PYPBHD40 Component Video & Audio/Spdif To HDMI Converter

- Input: 1 X Component Video), 1 X Audio L/R, 1 X SPDIF
- Output: 1 X HDMI
- Output Audio Is Selectable Between Stereo Audio L/R And SPDIF
- 1 X Component Video Input + 1X Stereo Audio = 1 X HDMI Output
- 1 X Component Video + 1 X SPDIF = 1 X HDMI Output -Supports SPDIF Digital 5.1 Audio
- It Supports Full Range Of Component Video Resolutions: 480i, 480p, 576i, 576p, 720p, 1080i And 1080p
- Output Resolution Is The Same With The Input One, And Users Need To Set A Resolution Of The Input Device That The HDTV Supports
- In Case You Have To Use A 480i Or 480p Input Device While Your HDTV Doesn't Support These
- Resolution, Please Choose Another Model PVGCHD72, Which Is With Up-Scaling Function And The Output Resolution Is Fixed At 720p
- Product Dimension: 1.3"(L) X 2.9(W) X 1.1"(H)
- AC Adapter 110/220V Included



PYPBV760 Component Video TO VGA Converter

- Input: 1 X VGA, 1 X Component Video (Y-PB-PR), 1 X Stereo Audio
- Output: 1 X VGA, 1 X Audio
- Component Video Resolution: 480i, 576i, 480p, 576p, 720p, 1080i, 1080p(50hz/60hz);
- VGA Resolution: 640x480; 800x600; 1024x768; 1440x900; 1400x1050, 1600x1200; 1680x1050;
- 1920x1200; 1280x768
- Brightness, Contrast, Saturation, HUE Are Adjustable;
- OSD (On-Screen-Display) Menu
- Both PC And Mac Computer Are Supported
- Portable Size:5"(L) X 4.2"(W) X 1.4"(H)
- AC Adapter 110/220V Included



PRCA7504 Composite & Converter To VGA-Wide Sreen

- Composite Video Input Interface: RCA (The Model With BNC Interface Is: PBNC7503)
- Inputs: 1 X Composite Video, 1 X S-Video And 1 X VGA;
- Output: 1 X VGA;
- Switch Between The 3 Inputs And Output One Of Them To VGA;
- The VGA Input Is Pass Through To The VGA Output Directly Without Any Processing, Both PAL/NTSC Are Supported;
- It Supports Wide-Screen 16:9 And 16:10 LCD As Well To Cater For Wider Applications;
- Optional Resolution: 800 X 600/60HZ, 800 X 600/75HZ, 1024X768/60HZ, 1280 X 720/60HZ, 1440 X 900/60HZ, 1600 X 900/60HZ, 1680 X 1050/60HZ;
- Lightness, Hue, Contrast, Saturation, Color, Etc. Are Adjustable And Settings Is Auto-Saved When Power Off
- Composite Video And S-Video Are Up-Scaled To 1680 x 1050 And 3D Video-Processing Tech Is Applied To Make Output Picture Rich In Color, More Vivid And Free From Flicker
- Product Dimension: 3.9"(L) X 2.4"(W) X 1"(H)
- AC Adapter 110/220V Included



PSCHD45

SCART To HDMI Converter

- Up-Scales SCART (Including RGB, Composite Video And Audio L/R)
- Signal From Devices Such As Sky, Sky+, Standard DVD Player, Wii Console, Etc. To HDMI 720p.
- It Is With Real Scaler Function, And Output Resolution Is Fixed At 720P To Avoid Compatibility Problem
- Motion Compensated 3D Wavelet Video Coding Technology Is Applied To Make The Converted Picture
- Rich In Color And More Vivid;
- SCART Audio Is Integrated Into HDMI Output As Well As Pass-Through To Earphone Or Sound Box;
- RGB Input At 50Hz Or 60Hz Vertical Rate And Composite Video NTSC Or PAL Is Automatically Detected And Adjusted;
- Product Dimension: 6.1(L) X 3.3(W) X 1.1 (H)
- AC Adapter 110/220V Included



PSPHD42

PSP To HDMI Converter With Up-Scaling (Full Screen)

- Input: 1 X PSP In (Component Video And Audio From PSP Pass Through A VGA Interface)
- Output: 1 X HDMI, 1 X 3.5mm Audio
- It Achieves Full-Screen Display Of Sony Playstation Portable On HDTV And HD LCD, While Normal Conversion Or Direct Connection Can Not Be Done
- It Is With Up-Scaling Function Up-Scales PSP Output Resolution 480P To HDMI 720P, Offering You HD Video Game
- Motion Compensated 3D Wavelet Video Coding Technology Is Applied To Make The Converted Picture Richer In Color More Vivid And Free From Flicker Or Delay For Fast-Moving Video
- HDMI Output: 720P @ 60Hz
- Compatible With All Kinds Of HDMI Displays
- Product Dimension: 4.3"(L) X 3.3"(W) X 1.1"(H)
- AC Adapter 110/220V Included



PVGC200

PC VGA To TV Composite Video & S-Video Converter

- 1 Input: 1 X VGA; 3 Loop-Through Outputs: 1 X VGA, 1 X Composite Video, 1 X S-Video;
- PC VGA Resolution: 640 X 480 (60/72/75/85Hz), 800 X 600 (60/75Hz), 1024 X 768 (60/75Hz).
- Higher Resolutions Are Supported, While The Lower The Resolution Is, The Better The Picture Effect Will Be On Screen Display (OSD) Menu
- Plug And Play. No Software Driver Is Needed
- Both PAL / NTSC Are Compatible
- HSIZE, VSIZE, BRIGHTNESS, CONTRAST, HUE, SATURATION, SHARPNESS And OSD -Background Color Are Adjustable
- Product Dimension: 3.9"(L) X 2.4"(W) X 1"(H)
- It Is Powered By USB Port Of PC Host Via Special-Made USB Power Cable. When The USB Port Of The PC Host Fails To Work
- A DC 5V External Power Supply Is Optional
- AC Adapter 110/220V Included



PVGCHD72

VGA & Component & Audio To HDMI Scaler

- PVGCHD72 Is A VGA (With Audio) To HDMI + Component (With Audio) To HDMI All In One Box;
- It Is With High Quality UpScaling Function To Up Scale Either VGA Or Component Video To HDMI 720P
- Input: 1 X VGA, 1 X Component Video, 1 X 3.5mm Audio (Stereo Audio L/R);
- Output: 1 X HDMI;
- Stereo Audio Passes Through 3.5mm Audio Interface;
- Input VGA And Component Video Are Selectable By Switch Button On The Converter Box; PC VGA Resolution: 640x480(60Hz;75Hz,85Hz), 800x600 (60Hz,75Hz,85Hz), 1024x768(60Hz,75Hz,85Hz), 1280x720 (60Hz), 1280x768 (75Hz), 1280x960 (60Hz);
- Component Video Resolution: 480i (60Hz), 480P (60Hz), 576i (50Hz), 576P (50Hz), 720P (50Hz,60Hz), 1080i (50Hz, 60Hz), 1080P (50Hz, 60Hz)
- Output Resolution Is Fixed At 720p To Avoid Compatibility Problem And Save User's Work Of Setting Resolution On Their PC's And HDTV's.
- Product Dimension: 5.8"(L) X 3.7" (W) X 1"(H)
- AC Adapter 110/220V Included



PVHDM35

VGA & Audio To HDMI Converter

- Input: 1 X VGA, 1 X 3.5mm Audio (Stereo Audio L/R);
- Output: 1 X HDMI;
- The Input Stereo Audio L/R Passes Through 3.5mm Audio Interface;
- VGA Resolution: 1920 X 1080 @ 60Hz, 1360 X 768 @ 60Hz, 1280 X 1024 @ 60Hz, 1024 X 768 @ 60Hz, 1280 X 720 @ 60Hz, 1280 X 768 @ 60Hz, 800 X 600 @ 60Hz, 640 X 480 @ 60Hz, 720 X 400 @ 85Hz;
- Output Resolution Is The Same With The Input One.
- Please Set An Output VGA Resolution & Refresh Rate That The HDTV Supports
- In Case Your HDTV Doesn't Support Any One Of The VGA Resolution This Converter Box Supported, Please Choose Another Model From Us: PVGCHD72, Which Is With Up-Scaling Function And The Output Resolution Is Fixed At 720p;
- Product Dimension: 4.3" (L) X 2.9" (W) X 1.1" (H)
- AC Adapter 110/220V Included



PHCT45

Network Cable Tester

- Made to crimp RJ45 plugs
- All-steel handles with padding
- Checks RJ45 and BNC network cables
- Checks up to four pairs of conductors for Continuity and correct polarity
- Dimensions: 4.4" X 3.8" x 1"





Product Line

PHDMSWM2 High Definition HDMI 2 Source Input and 1 Source Output Manual Switcher (MECHANICAL)

- The HDMI switch is designed to allow your Multiple High Definition Audio & Video equipment to a HD Ready TV using concise space saving and time Saving Technology.
- The HDMI switch allows more than one HDMI devices to share one HDMI compatible monitor, HDTV or projector.
- Suitable for 1080p and Lower Video formats
- Support digital video and audio by HDMI standard 1.3 Specification
- HDMI-HDMI cable can be used to connect The inputs or output
- Inputs can be selected from button on the front panel



PHDMSWM3 High Definition HDMI 3 Source Input and 1 Source Output Manual Switcher (MECHANICAL)

- The HDMI switch is designed to allow your Multiple High Definition Audio & Video equipment to a HD Ready TV using concise space saving and time Saving Technology.
- The HDMI switch allows more than one HDMI devices to share one HDMI compatible Monitor, HDTV or projector.
- Suitable for 1080p and Lower Video formats
- Support digital video and audio by HDMI standard 1.3 Specification
- HDMI-HDMI cable can be used to connect The inputs or output
- Inputs can be selected from button on the front panel



PHDMSWM4 High Definition HDMI 4 Source Input and 1 Source Output Manual Switcher (MECHANICAL)

- The HDMI switch is designed to allow your Multiple High Definition Audio & Video equipment to a HD Ready TV using concise space saving and Time saving Technology. The HDMI switch Allows more than one HDMI devices to share one HDMI compatible monitor, HDTV or projector.
- Suitable for 1080p and Lower Video formats
- Support digital video and audio by HDMI standard 1.3 Specification
- HDMI-HDMI cable can be used to connect The inputs or output
- Inputs can be selected from button on the front panel



PHDMSWR3 High Definition HDMI 3 Source Input and 1 Source Output Wirelessly Operated Switcher(W Remote Control)

- The HDMI switch is designed to allow your Multiple High Definition Audio & Video equipment to a HD Ready TV using concise space saving and time Saving Technology. The HDMI switch allows more Than one HDMI devices to share one HDMI compatible monitor, HDTV or projector.
- Suitable For 1080p and Lower Video Formats.
- Support Digital Video and Audio by HDMI Standard 1.3 Specification
- HDMI-HDMI Cable Can Be Used To Connect The Inputs Or Output.
- Inputs Can Be Selected From Wireless IR Remote Controller (Included) Or Controls On The Front Panel



PHDMSWR4 High Definition HDMI 4 Source Input and 1 Source Output Wirelessly Operated Switcher

- The HDMI switch is designed to allow your Multiple High Definition Audio & Video equipment to a HD Ready TV using concise space saving and time saving Technology.
- The HDMI switch allows more than one HDMI devices to share one HDMI compatible monitor, HDTV or projector.
- Suitable For 1080p and Lower Video Formats.
- Support Digital Video and Audio By HDMI Standard 1.3 Specification
- HDMI-HDMI Cable Can Be Used To Connect The Inputs Or Output.
- Inputs Can Be Selected From Wireless IR Remote Controller (Included) Or Controls On The Front Panel



PHDMSWR5 High Definition HDMI 5 Source Input and 1 Source Output Wirelessly Operated Switcher (W Remote Control)

- The HDMI switch is designed to allow your Multiple High Definition Audio & Video equipment to a HD Ready TV using concise space saving and time Saving Technology. The HDMI switch allows More than one HDMI devices to share one HDMI compatible monitor, HDTV or projector.
- Suitable For 1080p and Lower Video Formats.
- Support Digital Video and Audio by HDMI Standard 1.3 Specification
- HDMI-HDMI Cable Can Be Used To Connect The Inputs Or Output.
- Inputs Can Be Selected From Wireless IR Remote Controller (Included) Or Controls On The Front Panel



PD006

6 FT Toslink Optical Digital Audio cable

- Immune to all forms of EMI/RFI
- Low-Loss MPPA core ensures low distortion
- Superior-grade optical fiber and precision polished Optical terminations
- Ultra-flexible PVC jacket makes installation easy, Non-slip rubber grip connector provides for easy installation
- Protective plastic cover protects lens from Dust, dirt, and other material



PHAA3

3 FT HDMI Type A Male To HDMI Type A Male

PHAA6

6 FT HDMI Type A Male To HDMI Type A Male

PHAA12

12 FT HDMI Type A Male to HDMI Type A Male

- Number of Connectors: 2
- Connectors Details: 1 x HDMI Type A 19 Pin Male, 1 x HDMI Type A 19 Pin Male
- 24k Gold-Plated Connectors
- Insulation: Quad-Shielding
- Jacket: PVC - Flexible



PHDD3

3 FT HDMI Type D (Micro) Male To HDMI Type D (Micro) Male

PHDD6

6 FT HDMI Type D (Micro) Male To HDMI Type D (Micro) Male

PHDD12

12 FT HDMI Type D (Micro) Male To HDMI Type D (Micro) Male

- Number of Connectors: 2
- Connectors Details: 1 x HDMI Type D (Micro) 19 Pin Male, 1 x HDMI Type D (Micro) 19 Pin Male
- 24k Gold-Plated Connectors
- Insulation: Quad-Shielding
- Jacket: PVC - Flexible



PHAD3

3 FT HDMI Type A Male To HDMI Type D (Micro) Male

PHAD6

6 FT HDMI Type A Male To HDMI Type D (Micro) Male

PHAD12

12 FT HDMI Type A Male To HDMI Type D (Micro) Male

- Number of Connectors: 2
- Connectors Details: 1 x HDMI Type A 19 Pin Male, 1 x HDMI Type D (Micro) 19 Pin Male
- 24k Gold-Plated Connectors
- Insulation: Quad-Shielding
- Jacket: PVC - Flexible



PHDM3

3ft High Definition HDMI Cable

PHDM6

6ft High Definition HDMI Cable

PHDM12

12ft High Definition HDMI Cable

- HDMI cables provide an uncompressed digital link Between consumer electronics equipment such as DVD players, Cable or Satellite boxes and audio Video monitors such as Plasma & LCD Display Screens for HDTV's. Suitable for 1080p and Lower Video formats.



PHDMRT3

3FT Horizontal Swivel High Definition HDMI Cable w/ Heavy-Duty Fiber Shielding

PHDMRT6

6FT Horizontal Swivel High Definition HDMI Cable w/ Heavy-Duty Fiber Shielding

PHDMRT12

12ft Horizontal Swivel High Definition HDMI Cable w/ Heavy-Duty Fiber Shielding

- HDMI cables provide an uncompressed digital link Between consumer electronics equipment such as DVD players, Cable or Satellite boxes and audio/ Video monitors such as Plasma & LCD Display Screens for HDTV's. Suitable for 1080p and Lower Video formats.
- Delivers rich uncompressed Digital Video and True Life Surround Sound Audio on One Cable
- Engineered to Complement Flat Screen LCDs and Plasma Displays
- Swivel 180 Degrees Design is Ideal for Flat Panel HDTVs, and Other Hook-Ups where Space is Limited
- Supports High Definition Resolutions 1080p, 1080i, 720p, and Standard Video Format
- Backward Compatible with Prior HDMI and DVI Specifications
- Gold Plated HDMI Connections
- Smooth Flexible 28 AWG Jacket
- Resolution: 2048 x 1536
- Data Speed Transfer: 10.2 Gbps



PHDMDV13

3FT HDMI Male To DVI Male Cable

PHDMDV16

6FT HDMI Male To DVI Male Cable

PHDMDV12

12FT HDMI Male To DVI Male Cable

- Number of Connectors: 2
- Connector Details: 1 x DVI Male 18 Pin, 1 x HDMI Male 19 Pin
- 24k Gold-Plated Connectors
- Insulation: Quad-Shielding
- Jacket: PVC - Flexible





Product Line

PHDMFCI

HDMI Male to Female Coupler - 90 Degree

- High Performance Connection Between HDMI And HDMI Cables
- This Adapter Makes It Easy To Enjoy The Ultra-High Definition Video HDMI Delivered.
- Transfer Digital Audio & Video Signals At Warp Speed Of 5 Gigabytes Per Second



PHDMFFI

HDMI Female To Female Adapter

PHDMFF9

HDMI Female to Female Adaptor Right Angle

- HDMI Female to Female adaptor
- Accepts A Standard 19 Pin Male HDMI Plug On Both Ends Which Extends Your HDMI Cables
- Supports Video Resolutions Up To 1920 X 1080 And Data Rates To 5Gbps
- Audio And Video Signal Transfer Is All Digital And Uncompressed While Control Signal Transfer Is Inherently Bi-Directional
- Fully Molded Construction
- Black PVC Body And Overmold
- 100% Coverage Tinned Steel Shield
- Gold plated



PHDMMF3

HDMI Male to 2 Female Video Splitter Adapter Cable

- HDMI 24K Gold Plated
- HDMI 19-Pin Male At One End
- 2x HDMI 19-Pin Female At Another End
- Output HDMI High Quality Digital Video Signal To 2 HDMI Female Output
- You Can Only Connect One Input Device (Eg. DVD Player) To Two HDMI Output Device (Eg. TV). You Cannot Connect Two Input Device To One Output Device
- Suitable For High Definition Image Resolutions Such As 720p, 1080i, And 1080p
- You Can Connect The HDMI Cable To HDTV For The Ultimate Experience
- Suitable Use For Home Theater And Gaming Entertainment



PHMIDM

HDMI Male to DVI Male Adapter

- 24k Gold-Plated Connectors
- For Enhanced And Optimized Video Signal
- Jacket: PVC - Flexible
- Connector Details: 1 x DVI Male 18 Pin, 1 x HDMI Male 19 Pin



PHFIDM

HDMI Female to DVI Male Adapter

- 24k Gold-Plated Connectors
- For Enhanced And Optimized Video Signal
- Jacket: PVC - Flexible
- Connector Details: 1 x DVI Male 18 Pin, 1 x HDMI Female 19 Pin



PHDMIB I

Single HDMI Wall Palte 90 degree exit Port (BLACK)

PHDMIWI

Single HDMI Wall Plate 90 Degree Exit Port(WHITE)

- Feed-Thru HDMI Wall Plate
- Designed For In-Wall HDMI Cable Routing For Commercial Or Residential
- Suitable For Home Theater Hi-Def Installs
- High Impact ABS Plastic
- Delivers High-Bandwidth, Uncompressed Video And Multi-Channel Digital Audio Between HDMI Compliant Devices Including DVD Player / Recorders, Set-Top Boxes And Digital Tvs
- Supports High Resolution Display Up To 1080p
- HDMI Female To HDMI Female Ports
- Black Color Plate



PHWP I

Dual Post Binding/Banana Plug Wall Plate White (2 Posts/Polarity For 1 Speaker)

PHWP2

Four Post Binding/Banana Plug Wall Plate White (4 Posts/Polarity For 2 Speakers)

- Provides Wall Mounted Wire Connection For One Speaker To Your Stereo System
- Single Speaker Wall Mount Clean Wire Connection
- In-Wall Speaker To Amplifier Connection
- Gold Plated, Color Coded (+/-) Terminals
- Banana Plug Compatible
- Attractive Decora Style White Wall Plate



PHDMF1

Single HDMI Wall Plate

PHDMF2

Dual HDMI Wall Plate

- HDMI one Jack Wall Plate
- Feed-Thru HDMI Wall Plate
- Designed For In-Wall HDMI Cable Routing For Commercial Or Residential
- Suitable For Home Theater Hi-Def Installs
- High Impact ABS Plastic
- Delivers High-Bandwidth, Uncompressed Video And Multi-Channel Digital Audio Between HDMI Compliant Devices Including DVD Player Recorders, Set-Top Boxes And Digital TVs
- Supports High Resolution Display Up To 1080p
- HDMI Female To HDMI Female Ports
- Attractive Decora style white wall plate



PHDMR82

Dual HDMI Wall Plate 90 Degree Exit Ports (BLACK)

PHDMIW2

Dual HDMI Wall Plate 90 Degree Exit Ports (WHITE)

- Feed-Thru HDMI Wall Plate
- Standard Dual HDMI Input With Dual 90 Degree Exit Port
- Designed For In-Wall HDMI Cable Routing For Commercial Or Residential
- Suitable For Home Theater Hi-Def Installs
- High Impact ABS Plastic
- Delivers High-Bandwidth, Uncompressed Video And

Multi-Channel Digital Audio Between HDMI Compliant Devices Including DVD Player / Recorders, Set-Top Boxes And Digital Tvs

- Supports High Resolution Display Up To 1080p
- HDMI Female To HDMI Female Ports
- Mounts To Standard Electrical Box
- Attractive Decora style wall plate



PHDMR8C2

Dual HDMI Wall Plate 90 Degree Exit Ports

PHDMR8C3

HDMI/ 3 (RGB/RCA) Component Combo Wall Plate

- Feed-Thru HDMI Wall Plate
- Standard Dual HDMI Input With Dual 90 Degree Exit Port
- Designed For In-Wall HDMI Cable Routing For Commercial Or Residential
- Suitable For Home Theater Hi-Def Installs
- High Impact ABS Plastic
- Delivers High-Bandwidth, Uncompressed Video And Multi-Channel Digital Audio Between HDMI Compliant Devices Including DVD Player / Recorders, Set-Top Boxes And Digital Tvs
- Supports High Resolution Display Up To 1080p
- HDMI Female To HDMI Female Ports
- Mounts To Standard Electrical Box
- Attractive Decora style Black wall plate



PHDK6

HDMI + RJ11 + RJ45 + Coaxial + RCA Wallplate W/Back Built-in Flexible Cable For Easy Installation

- Back Cable Terminal For Easy Installation
- HDMI Input/Output Connector: Type A 19 Pin
- Works Well With both HDMI and DVI Equipped Components (DVI Adapter Required)
- Current Rating: Dc 1amp
- Withstanding Voltage: Dc 300v, 10ms

- Insulation Resistance: 10m Ohms
- Conductive Resistance: 2 OHMSV
- Perfect For Connecting Your HDMI Monitors, A/V Receivers, and HDTV
- Supports All HDMI Devices, Including 1.3b
- Supports Resolutions Up To 1080p



PHDK8

Single Port HDMI White Wall Plate W/Back Built-in Flexible Cable For Easy Installation

- HDMI Input/Output Connector: type A 19 pin
- Works well with both HDMI and DVI equipped Components (DVI adapter required)
- Current rating: DC 1Amp
- Withstanding voltage: DC 300V, 10MS
- Insulation resistance: 10M Ohms
- Conductive resistance: 2 Ohmsv

- Perfect for connecting your HDMI Monitors, A/V Receivers, and HDTV
- Supports all HDMI Devices, including 1.3b
- Supports Resolutions up to 1080P
- Mounts To Standard Electrical Box
- Attractive Decora Style White Wall Plate
- Color White





Product Line

PHDK9

2 Port HDMI Wallplate W/Back Built-in Flexible Cable For Easy Installation

- This HDMI Mounting Wall Plate Supports The Appearance Of A Professional Installation
- Route Your HDMI Cable Behind The Drywall For A Cable-Free Environment
- Wall Plate Has A Perfect Fitting With The Standard Outlet / Light Switch
- Works Well With Both HDMI And DVI Equipped Components (DVI Adapter Required)
- Current Rating: DC 1Amp
- Withstanding Voltage: DC 300V, 10ms
- Insulation Resistance: 10M Ohms
- Conductive Resistance: 2 OHMSV
- Perfect For Connecting Your HDMI Monitors, A/V Receivers, And HDTV
- Supports All HDMI Devices, Including 1.3B
- Supports Resolutions Up To 1080P
- Mounts To Standard Electrical Box
- Attractive Decora Style White Wall Plate
- color:white



PHDBM6

HDMI+2 RCA+3 RCA Black Wall plate

- HDMI Input/Output Connector: type A 19 pin
- Perfect for connecting your HDMI Monitors, A/V Receivers, and HDTV
- Supports all HDMI Devices, including 1.3b
- Supports Resolutions up to 1080P
- Works well with both HDMI and DVI equipped Components (DVI adapter required)
- Current rating: DC 1Amp
- Withstanding voltage: DC 300V, 10ms
- Insulation resistance: 10M Ohms
- Conductive resistance: 2 Ohmsv



PHDM2RJRF1

HDMI /Mono RCA Audio /Coaxial /Dual Ethernet Combo Wall Plate

- HDMI Plus 1 Gold RCA, 2 RJ45, And Coaxial Wall Plate
- Single F-Type Coaxial Wall Plate
- Suitable for both Rg59 and Rg6 coaxial cable
- Mono Audio RCA Port
- Dual Ethernet (RJ45) Ports
- Gold Plated
- Helps Remove The Clutter Of HDMI And Other Cables And Enhances An HDTV Installation
- Supports Standard And High-speed Cables For HDTV Sets And Blu-Ray Disc™ Players/Recorders And HD Set-Top Boxes
- Smooth Finish, High-Impact ABS Plastic Construction
- HDMI Feed-Through RCA Couplers With Gold-Plated Contacts Includes Mounting Screws And HDMI Port Protectors
- HDMI Female To HDMI Female Ports
- Mounts to Standard Electrical Box
- Attractive Decora style white wall plate



PHDM2RB2

HDMI/Mono RCA Audio/Coaxial/ Dual Ethernet

- HDMI Plus 1 Gold RCA, 2 Rj45, And coaxial Wall Plate
- Gold Plated
- Includes Matching Screws
- Designed For In-Wall HDMI Cable Routing For Commercial Or Residential
- Suitable For Home Theater Hi-Def Installation
- High Impact ABS Plastic
- Delivers High-Bandwidth, Uncompressed Video And Multi-Channel Digital Audio Between HDMI Compliant Devices Including DVD Player Recorders, Set-Top Boxes And Digital TVs
- Mounts to Standard Electrical Box
- Attractive Decora style Black wall plate



PHDK1

Dual HDMI + 2 RCA + 3 RCA Wall plate W/Back Pigtail Plug For Easy Intallation

- Back Cable Terminal For Easy Instulation
- HDMI Input/Output Connector: Type A 19 Pin
- Works Well With Both HDMI And DVI Equipped Components (DVI Adapter Required)
- Current Rating: DC 1Amp
- Withstanding Voltage: DC 300V, 10ms
- Insulation Resistance: 10M Ohms
- Conductive Resistance: 2 Ohmsv
- Perfect For Connecting Your HDMI Monitors, A/V Receivers, And HDTV
- Supports All HDMI Devices, Including 1.3b
- Supports Resolutions Up To 1080P
- Mounts to Standard Electrical Box
- Attractive Decora style white wall plate



PHDMRCF2

HDMI/Stereo (Dual) RCA Audio Combo Wall Plate

- HDMI jack And RCA Audio Jack Wall Plate
- Connectors:1 HDMI, 2 RCA Component Video
- Supports High Resolution Display Up To 1080p
- HDMI Female To HDMI Female Ports
- Stereo Audio RCA Port
- Suitable For Home Theater Hi-Def Installs
- Delivers High-Bandwidth, Uncompressed Video And Multi-Channel Digital Audio Between HDMI Compliant Devices Including DVD Player Recorders, Set-Top Boxes And Digital TVs
- Gold plated connections
- Mounts to Standard Electrical Box
- High Impact ABS Plastic
- Attractive Decora style white wall plate



PHDMRCF3 HDMI/ 3 (RGB/RCA) Component Combo Wall Plate

- HDMI jack and RGB jack wall Plate
- Feed-Thru HDMI Wall Plate
- Designed For In-Wall HDMI Cable Routing For Commercial Or Residential
- Suitable For Home Theater Hi-Def Installs
- Delivers High-Bandwidth, Uncompressed Video And Multi-Channel Digital Audio Between HDMI Compliant Devices Including DVD Player / Recorders, Set-Top Boxes And Digital TVs
- Supports High Resolution Display Up To 1080p
- HDMI Female To HDMI Female Ports
- Use with RGB Component Video Cables
- (3) Gold plated Color-Coded RCA Jacks (Red/Green/Blue)
- Provides wall mounted RGB/RCA connection For one device to your video system
- Mounts to Standard Electrical Box
- High Impact ABS Plastic
- Attractive Decora style white wall plate



PHDMIW6 HDMI + 2 RCA + 3 RCA Double Wall Plate

- HDMI Input/Output Connector: type A 19 pin
- Works well with both HDMI and DVI equipped Components (DVI adapter required)
- Current rating: DC 1Amp
- Withstanding voltage: DC 300V, 10ms
- Insulation resistance: 10M Ohms
- Conductive resistance: 2 Ohmsv
- Perfect for connecting your HDMI Monitors, A/V Receivers, and HDTV
- Supports all HDMI Devices, including 1.3b
- Supports Resolutions up to 1080P
- Mounts To Standard Electrical Box
- Attractive Decora Style White Wall Plate



PHI71B 7.1 Home Theater Fourteen Post Binding/Banana Plug with Dual RCA Subwoofer Posts Wall Plate Black (14 Posts/Polarity for 7 Speakers)

- Provides Wall Mounted Wire Connection For Seven Speakers To Your Stereo System
- Seven Speaker Wall Mount Clean Wire Connection
- In-Wall Speaker To Amplifier Connection
- 14 Gold Plated, Color Coded (+/-) Terminals
- Banana Plug Compatible
- Dual Sub-Woofer RCA Line-Level Connection.
- Mounts To Standard Electrical Box
- Attractive Decora Style Black Wall Plate



PHIW71 7.1 Home Theater Fourteen Post Binding/Banana Plug with Dual RCA Subwoofer Posts Wall Plate White (14 Posts/Polarity for 7 Speakers)

- Provides Wall Mounted Wire Connection For Seven Speakers To Your Stereo System
- Seven Speaker Wall Mount Clean Wire Connection
- In-Wall Speaker To Amplifier Connection
- 14 Gold Plated, Color Coded (+/-) Terminals
- Banana Plug Compatible
- Dual Sub-Woofer RCA Line-Level Connection.
- Mounts To Standard Electrical Box
- Attractive Decora Style White Wall Plate



PHDMRCF1 HDMI/Mono RCA Audio Combo Wall Plate

- HDMI jack And RCA Audio Jack Wall Plate
- Connectors:1 HDMI, 1 RCA Component Video
- Supports High Resolution Display Up To 1080p
- HDMI Female To HDMI Female Ports
- Mono Audio RCA Port
- Suitable For Home Theater Hi-Def Installs
- Delivers High-Bandwidth, Uncompressed Video And Multi-Channel Digital Audio Between HDMI Compliant Devices Including DVD Player / Recorders, Set-Top Boxes And Digital TVs
- Gold plated connections
- Mounts to Standard Electrical Box
- High Impact ABS Plastic
- Attractive Decora style white wall plate



PHRCA2 Dual Stereo RCA Wall Plate

- Double RCA Wall Plate
- No soldering required - plug and play
- Fits Standard J-Box (Electrical Outlet Box)
- Dual threaded gold plated terminals
- Attractive Decora style white wall plate



PHRCOMP3 3 RGB/RCA Component Wall Plate

- Use With RGB Component Video Cables
- (3) Gold Plated Color-Coded RCA Jacks (Red/Green/Blue)
- Provides Wall Mounted RGB / RCA Connection For One Device To Your Video System
- Mounts To Standard Electrical Box
- Attractive Decora Style White Wall Plate





Product Line

PHDVR40

4 Channel DVR & 4 Color Camera Surveillance Kit

- DVR
- Duplex Operation: Simultaneous Playback/Record
- Built in removable HD rack and USB V1.1 port for Backup
- Motion detection and video loss alarm function
- Power recovery auto-record function
- OSD: Support multi-language
- Color Cameras
- Low Illumination
- Electronic Shutter control
- IR LEDs/Day and Night mode switch
- High S/N ratio
- Optical Low pass filter
- Optional: color CMOS/CCD camera
- Package Contents:
- Built-in Removable HD Rack DVR
- 4 x Color Cameras
- Power Supply
- 5 Way Power Cable Splitter
- 4x18m Cables
- User Manual
- PS/2 Mouse
- IR Controller



PDVRJ2

4 Channel DVR Color Camera Surveillance Kit w/ Built-in Monitor & 4 Cameras

- DVR
- Simplex Operation: Simultaneous Playback/Record
- Built in fixed HD rack and USB V2.0 port for Backup
- Supports SATA Hard Disk Drives
- Motion detection and video loss alarm function
- Power recovery auto-record function
- OSD: Support multi-language
- Color Cameras
- Low Illumination
- Electronic Shutter control
- IR LEDs/Day and Night mode switch
- High S/N ratio
- Optical Low pass filter
- Optional: color CMOS/CCD camera



PDVRJ4

Wireless 4 Color Camera Surveillance Kit

- 380 TVL of horizontal definition.
- Extra 4 PIP with 4 channels for watch.
- Camera feature 12 φ5 LED infrared lamps and 7m night vision distance.
- Sealed Case, Completely Waterproof.
- Wireless or Wired Operation.
- 100m Wireless Transmission Distance.
- Audio Monitoring with Built In Microphones.
- NTSC System
- Receiver and Cameras Utilize DC 12V/500mA Power Adapters.



PHCM27

Replacement Camera for DVR Surveillance Kit

- Color Cameras
- Low Illumination
- Electronic Shutter control
- IR LEDs/Day and Night mode switch
- High S/N ratio
- Optical Low pass filter
- Optional: color CMOS/CCD camera



PHCM29

Indoor/Outdoor Security Camera with 65 Foot Night Vision, 1/4" Sharp CCD

- For Both Indoor and Outdoor Use
- Validity Pixel: NTSC: 510(H)*492(V)
- Image Sensor: 1/4" Sharp CCD
- Horizontal Definition: 420TV Line
- Lens: 3.6mm Fix Lens
- IR View Distance: 65 feet
- LED 24PCS
- LED Switch Auto
- Minimum Illumination 0 Lux
- AGC Auto
- Synchronization Internal
- Scanning Frequency (H) 15.625 KHz
- Scanning Frequency (V) 50Hz
- Backlight Compensation Auto
- Electronic Shutter 1/50 (1/60) ~ 1/100.000sec
- White Balance Auto
- S/N Ratio >48db
- Gamma Correction >0.45
- Operation Temperature -10 ~ +50/+14 ~ +122
- Operation Humidity 85%RH
- Power adapter DC 12V/500mA



PHCM30

Indoor/Outdoor Surveillance Security Camera with 65 Foot Night Vision, 1/4" Sharp CCD

- For Both Indoor and Outdoor Use
- Validity Pixel: NTSC: 510(H)*492(V)
- Image Sensor: 1/4" Sharp CCD
- Horizontal Definition: 420TV Line
- Lens: 3.6mm Fix Lens
- Night Vision Distance: 65 Ft.
- LED 24PCS
- LED Switch Auto
- Minimum Illumination 0 Lux
- AGC Auto
- Synchronization Internal
- Scanning Frequency (H) 15.625 KHz
- Scanning Frequency (V) 50Hz
- Backlight Compensation Auto
- Electronic Shutter 1/50 (1/60) ~ 1/100.000sec
- White Balance Auto
- S/N Ratio >48db
- Gamma Correction >0.45
- Operation Temperature -10 ~ +50/+14 ~ +122
- Operation Humidity 85%RH
- Power adapter DC 12V/500mA



NEW for 2011

PHCM31

Indoor Dome Security Surveillance Camera with 1/4" Sharp CCD

- For Indoor Use
- Validity Pixel: NTSC: 510(H)*492(V)
- Image Sensor: 1/4" Sharp CCD
- Horizontal Definition: 420TV Line
- Lens: 3.6mm Fix Lens
- Minimum Illumination 0.5 Lux
- AGC Auto
- Synchronization Internal
- Scanning Frequency (H) 15.625 KHz
- Scanning Frequency (V) 50Hz
- Backlight Compensation Auto
- Electronic Shutter 1/50 (1/60) ~ 1/100.000sec
- White Balance Auto
- S/N Ratio >48db
- Gamma Correction >0.45
- Operation Temperature -10 ~ +50/+14 ~ +122
- Operation Humidity 85%RH
- Power adapter DC 12V/500mA



NEW for 2011

PHCM32

Outdoor/Indoor Security Surveillance Camera with 50 Foot Night Vision, 1/4" Sharp CCD

- For Both Indoor and outdoor Use
- Validity Pixel: NTSC: 510(H)*492(V)
- Image Sensor: 1/4" Sharp CCD
- Horizontal Definition: 420TV Line
- Lens: 3.6mm Fix Lens
- Night Vision Distance: 50 Ft.
- LED 12PCS
- LED Switch Auto
- Minimum Illumination 0 Lux
- AGC Auto
- Synchronization Internal
- Scanning Frequency (H) 15.625 KHz
- Scanning Frequency (V) 50Hz
- Backlight Compensation Auto
- Electronic Shutter 1/50 (1/60) ~ 1/100.000sec
- White Balance Auto
- S/N Ratio >48db
- Gamma Correction >0.45
- Operation Temperature -10 ~ +50/+14 ~ +122
- Operation Humidity 85%RH
- Power adapter DC 12V/500mA



NEW for 2011

PHCM34

Color Video Surveillance Outdoor Night Vision Camera, 1/4" CMOS 420TVL, 12V/500mA Power adapter

- Validity Pixel: NTSC: 510(H)*492(V)
- Image Sensor: 1/4" Color CMOS
- Horizontal Definition: 420TV Line
- Lens: 3.6mm Fix Lens
- IR View Distance: 10M
- LED 12PCS
- LED Switch Auto
- Minimum Illumination 0 Lux
- AGC Auto
- Synchronization Internal
- Scanning Frequency (H) 15.625 KHz
- Scanning Frequency (V) 50Hz
- Backlight Compensation Auto
- Electronic Shutter 1/50 (1/60) ~ 1/100.000sec
- White Balance Auto
- S/N Ratio >48db
- Gamma Correction >0.45
- Operation Temperature -10 ~ +50/+14 ~ +122
- Operation Humidity 85%RH
- Power adapter DC 12V/500mA



NEW for 2011

PHCM35

1/4" Sharp CCD 420TVL, 12V/500mA Power adapter

- Validity Pixel: NTSC: 510(H)*492(V)
- Image Sensor: 1/4" Sharp CCD
- Horizontal Definition: 420TV Line
- Lens: 3.6mm Fix Lens
- IR View Distance: 20M
- LED 24PCS
- LED Switch Auto
- Minimum Illumination 0 Lux
- AGC Auto
- Synchronization Internal
- Scanning Frequency (H) 15.625 KHz
- Scanning Frequency (V) 50Hz
- Backlight Compensation Auto
- Electronic Shutter 1/50 (1/60) ~ 1/100.000sec
- White Balance Auto
- S/N Ratio >48db
- Gamma Correction >0.45
- Operation Temperature -10 ~ +50/+14 ~ +122
- Operation Humidity 85%RH
- Power adapter DC 12V/500mA



NEW for 2011

PHCM36

Indoor Dome Video Surveillance Night Vision Camera, 1/4" Sony CCD

- For Indoor Use
- Validity Pixel: NTSC: 510(H)*492(V)
- Image Sensor: 1/4" Sony CCD
- Horizontal Definition: 420TV Line
- Lens: 3.6mm Fix Lens
- Night Vision Distance: 82 Feet
- LED 24PCS
- LED Switch Auto
- Minimum Illumination 0 Lux
- AGC Auto
- Synchronization Internal
- Scanning Frequency (H) 15.625 KHz
- Scanning Frequency (V) 50Hz
- Backlight Compensation Auto
- Electronic Shutter 1/50 (1/60) ~ 1/100.000sec
- White Balance Auto
- S/N Ratio >48db
- Gamma Correction >0.45
- Operation Temperature -10 ~ +50/+14 ~ +122
- Operation Humidity 85%RH
- Power adapter DC 12V/500mA



NEW for 2011



Product Line

PICL20

iPhone/iPod Docking Alarm Clock Radio

- Compatible with iPod
- Support USB/SD/MMC (optional)
- LED display
- Alarm Clock with snooze
- AM/FM Radio
- AC operation
- Total Power Output: 40 Watts



iPod Touch Sold Separately

PICL21U

iPhone/ iPod Docking Alarm Clock Radio

- Amplified speaker for iPhone/iPod/PC
- FM digital radio alarm clock
- Remote control
- USB port and SD/MMC slot (optional)
- Aux-in jack
- Charger for iPhone/iPod
- Total Power Output: 40 Watts
- AC power adaptor included



iPod Touch Sold Separately

PICL34B

iPhone/iPod FM Radio Receiver with Alarm Clock

- FM Stereo Radio PLL Digital Tuning System
- 10 Preset radio station memory
- LCD Display with 7 Auto Changing Colour Back-light
- Back-light Colour Select
- Electric Volume +/- Control
- 30 Pins iPod Docking Connector(Not included)
- Compatible with iPhone 3GS & 4G,iPod Classic, iPod Video,iPod 5G, iPod Mini, iPod Nano & iTouch,(all Generations)
- Battery Charging after iPhone/iPod Unit Docked-in (available for all iPod Models with 30 pin connector port)
- Clock Display with Sleep & Snooze Function
- Dual Alarm, Gradual wake up by Radio/ipod
- Buzzer or iPhone/iPod songs
- AC Adaptor Operates,with DC 3V Battery back-up (Battery not included)



iPod Touch Sold Separately

PICL34W

iPhone/iPod FM Radio Receiver with Alarm Clock

- FM Stereo Radio PLL Digital Tuning System
- 10 preset radio station memory
- LCD Display with 7 Auto Changing Colour Back-light
- Back-light Colour Select
- Electric Volume +/- Control
- 30 Pins iPod Docking Connector(Not included)
- Compatible with iPhone 3GS & 4G,iPod Classic, iPod Video ,iPod 5G , iPod Mini, iPod Nano & iTouch,(all Generations)
- Battery Charging after iPhone/iPod Unit Docked-in (available for all iPod Models with 30 pin connector port)
- Clock Display with Sleep & Snooze Function
- Dual Alarm, Gradual wake up by Radio/ipod
- Buzzer or iPhone/iPod songs
- AC Adaptor Operates ,with DC 3V Battery back-up (Battery not included)



iPod Touch Sold Separately

PH5CI20W

200 Watts High-Performance 2.0 Channel AM/FM Clock Radio Speaker With iPod / Iphone Docking Station(White)

- Compatibility: iPod Mini 1G; iPod Nano 1G, 2G, 3G,4G, 5G; iPod 3G, 4G, 5G, 5.5G, 6G; iPod Touch(Generation 1 & Generation 2) ;iPhone
- Aux Input Jack Allows Connection of Other Audio Devices, Such As MP3 and CD Players, Desktop Computers, Satellite Radio and Laptops
- Includes AM/FM Radio, Clock, Alarm, And RF Remote With Full iPod Navigation
- Radio Memory Station: AM 9 Station / FM 9 Stations
- sleep timer 5MIN/15MIN/30MIN
- Alarm Allows One To Wake Up To An iPhone, iPod, AM/FM Radio, Or Buzzer
- Fully Function Remote Control
- LCD Display
- Equalizer Function Control
- Automatic Gain Control
- SRS-3D Level Control
- Color: White
- Dimensions: 8.16"D 9.45"W 4.88"H
- Weight: 8 LBS;
- Power Source: 18V , 1.6A 110V



iPod Touch Not Included

PHSCI208

200 Watts High-Performance 2.0 Channel AM/FM Clock Radio Speaker With iPod / iPhone Docking Station(Black)

- Compatibility: iPod Mini 1G; iPod Nano 1G/2G/ 3G/4G/5G/iPod 3G/4G/5G/5.5G/6G/ iPod Touch(Generation 1 & Generation 2) iPhone
- Aux Input Jack Allows Connection of Other Audio Devices, Such As MP3 and CD Players, Desktop Computers, Satellite Radio and Laptops
- Includes AM/FM Radio, Clock, Alarm, And RF Remote With Full iPod Navigation
- Radio Memory Station: AM 9 Station / FM 9 Stations
- sleep timer 5MIN/15MIN/30MIN
- Alarm Allows One To Wake Up To An iPhone, iPod,

- AM/FM Radio, Or Buzzer
- Fully Function Remote Control
- LCD Display
- Equalizer Function Control
- Automatic Gain Control
- SRS-3D Level Control
- Color: Black
- Dimensions: 9.45" D 14.4 W" 4.88" H
- Weight: 8 LBS;
- Power Source: 18V , 1.6A 110V

NEW FOR 2011



PICDL082I

iPod/iTouch/iPhone Multi-Source Charging Clock Radio

- Dual Super High Bass Speaker System
- High Grade Digital Class-D Amplifier
- Velvet-Like Soft Top Panel Carpeting for Personal Devices
- Blue LED Clock Display with Dimmer / Night Mode
- AC Operation using Separate AC-Adaptor
- Multi-Charger for Upto 3 Devices
- Certified for iPhone Compatibility
- Plays and Charges most iPods, iPod Touch and iPhone
- PLL FM Stereo Radio Tuner with

- Station Memory Presets
- Digital Alarm Clock with Touch Snooze - Wake to iPhone/iPod/Radio
- DC Jack for Charging of Mobile Phones (DC Wire and Most Popular Connectors Included)
- USB-Jack for Universal Charging of Mobile Phones, Cameras and other Popular Devices
- AUX-In Jack (Audio Line Input) for External MP3 Player Connection
- Micro Size Remote Control Included

NEW FOR 2011



PICL82W

iPhone/iPod FM Radio Micro Receiver with CD Player & Alarm Clock (WHITE COLOR)

- Top Loading CD Player
- Compatible with CD/CD-R/CD-RW Discs
- Play, Pause ,Stop ,Forward & Backward Skip or search
- Programmable CD Playback, Repeat 1/all Tracks
- FM Stereo Radio PLL Digital Tuning System
- 10 preset stations memory,
- LCD Display with Back-light
- Electric Volume +/- Control
- 30 Pins iPod Docking Connector (Not included),
- Compatible with iPhone 3G, iPod, iPod Mini, iPod

- Nano (all Generations), iTouch, iPod Classic & iPod Video,
- Battery Charging after iPhone/iPod Unit Docked-in(available for all iPod Models with 30 pin connector port).
- Clock Display
- Full Function Remote Control
- AC Adaptor Operates
- 3.5mm AUX-IN Jack
- 2-way Speaker Box
- AC 110 Volts

NEW FOR 2011



PICL82B

iPhone/iPod FM Radio Micro Receiver with CD Player & Alarm Clock

- Top Loading CD Player
- Compatible with CD/CD-R/CD-RW Discs
- Play, Pause ,Stop ,Forward & Backward skip or search
- Programmable CD Playback, Repeat 1/all Tracks
- FM Stereo Radio PLL Digital Tuning System
- 10 preset stations memory,
- LCD Display with Back-light
- Electric Volume +/- Control
- 30 Pins iPod Docking Connector (Not included),
- Compatible with iPhone 3G, iPod, iPod Mini, iPod

- Nano (all Generations), i Touch, iPod Classic & iPod Video
- Battery Charging after iPhone/iPod Unit Docked-in(available for all iPod Models with 30 pin connector port).
- Clock Display
- Full Function Remote Control
- AC Adaptor Operates
- 3.5mm AUX-IN Jack
- 2-way Speaker Box
- AC 110 Volts

NEW FOR 2011



PICL48B

iPhone/iPod FM Radio Receiver with CD Player & Alarm Clock

- Top Loading CD Player
- Compatible with CD/CD-R/CD-RW Discs
- Play, Pause, Stop, Forward & Backward Skip or search
- Programmable CD Playback
- Repeat 1/all Tracks
- FM Stereo Radio
- PLL Digital Tuning System
- 20 preset stations memory
- LCD Display with Back-light
- Electric Volume +/- Control
- 30 Pins iPod Docking Connector (Not included)

- Compatible with iPhone 3GS & 4G,iPod 5G,iPod Mini,iPod Nano & iTouch (all Generations)
- iPod Classic & iPod Video
- Battery Charging after iPhone/iPod Unit Docked-in(available for all iPod Models with 30 pin connector port)
- Clock Display
- DUal Alarm Function Wake up by Buzzer
- FM Radio or iPhone/iPod music
- Full Function Remote Control
- 3.5mm AUX-IN Jack
- AC 110 Volts

NEW FOR 2011





Product Line

PICL48W

iPhone/iPod FM Radio Receiver with CD Player & Alarm Clock

- Top Loading CD Player
- Compatible with CD/CD-R/CD-RW Discs
- Play, Pause, Stop, Forward & Backward skip or search
- Programmable CD Playback
- Repeat 1/all Tracks
- FM Stereo Radio
- PLL Digital Tuning System
- 20 preset stations memory
- LCD Display with Back-light
- Electric Volume +/- Control
- 30 Pins iPod Docking Connector (Not included)
- Compatible with iPhone 3GS & 4G, iPod 5G, iPod Mini, iPod Nano & iPod Touch (all Generations)
- iPod Classic & iPod Video
- Battery Charging after iPhone/iPod Unit Docked-in (available for all iPod Models with 30 pin connector port)
- Clock Display
- DUAL Alarm Function Wake up by Buzzer
- FM Radio or iPhone/iPod music
- Full Function Remote Control
- 3.5mm AUX-IN Jack
- Total Power Output: 50 Watts
- AC 110 Volts



PICL45B

Enhanced iPod/iPhone Alarm Clock Speaker System W/ Am Fm Radio and Remote Control (Black)

- Supports Most iPhone and iPod Models With Universal Dock Connector
- AUX Input to Plug in Any Other Audio Source
- Wake to iPhone/iPod or buzzer
- AM/FM PLL Tuning with 20 Preset Memory Stations
- iPod/iPhone 30 Pins Docking with Rechargeable Plug
- Dual Alarm Clock Modes
- Snooze/Dimmer, Volume Up/Down, Dst On/Off, Sleep Auto Power On/Off
- Auto Memory Recall
- Lithium Battery for Clock Memory Backup
- Big LCD display, Aux input jack DC jack Rear Input
- Dual Stereo Speakers
- FM and AM antenna included
- Remote Control Included
- 4 x AA Batteries Provided
- Designed High-end Drivers Delivers Clarity, Depth and Power
- AC/DC Switching Power Adaptor 110-240V



PICL45W

Enhanced iPod/iPhone Alarm Clock Speaker System W/ Am Fm Radio and Remote Control (White)

- Supports most iPhone and iPod models with Universal Dock Connector
- AUX Input to Plug in Any Other Audio Source
- AM/FM PLL Tuning with 20 Preset Memory Stations
- iPod/iPhone 30 Pins Docking with Rechargeable Plug
- Dual Alarm Clock Modes
- Snooze/Dimmer, Volume Up/Down, Dst On/Off, Sleep Auto Power On/Off
- Auto Memory Recall
- Lithium Battery for Clock Memory Backup
- Big LCD display, Aux input jack DC jack Rear Input
- Dual Stereo Speakers
- FM and AM antenna included
- Remote Control Included
- 4 x AA Batteries Provided
- Designed High-end Drivers Delivers Clarity, Depth and Power
- AC/DC Switching Power Adaptor 110-240V



PICD651

iPod/iTouch/iPhone Flat Panel Motorized Vertical FM Radio CD Sound System

- Single Piece Flat Panel Micro System
- Wall Mountable, and Supplied with Desk Stand and Shelf Use
- Motorized Sliding CD-Door, Upward Opening
- Blue Backlit LCD Display
- Blue LED Lighting CD-Door and Control Keys
- 2-Way Isolated Speaker System with Elegant Cloth Speaker Grills
- Certified "Made for iPhone" by APPLE
- Apple® iPhone+iPod@Dock Built-In (Top Mounting)
- Plays and Charges most iPods, iPod Touch and iPhone
- FM Stereo Digital PLL Tuner with Station Memory Presets
- Programmable Vertical JAPANESE CD-Laser Optical Module
- CD-Audio Playback (CD-R Readable)
- Electronic Volume Controls + Electronic Power On/Off Switch
- Digital Quartz Clock with Alarm/Timer Functions
- AUX (Line-In) Jack for External MP3 Player Connection
- iPod/iPhone Video Out (RCA Jack) Built-In
- Wireless Credit-Card Type Remote Control



PHS150B

300 Watts High-Performance 2.1 Channel iPod / iPhone Home Music System With Built-In AM/FM Clock Radio

- Compatibility: iPod Mini 1G/iPod Nano 1G/2G/3G /4G/5G/iPod 3G/4G/5G/5.5G/6G/ iPod Touch (Generation 1 & Generation 2) ; iPhone
- Aux Input Jack Allows Connection of Other Audio Devices, Such As MP3 and CD Players, Desktop Computers, Satellite Radio and Laptops
- Includes AM/FM Radio, Clock, Alarm, And RF Remote With Full iPod Navigation
- One Key Control System
- Radio Memory Station AM:10 Stations / FM 10 Stations
- Dual Alarm Allows Two To Wake Up To An iPhone, iPod, AM/FM Radio, Or Buzzer
- Fully Function Remote Control
- LCD Display
- Equalizer Function Control
- Automatic Gain Control
- Dimensions: 11.26" x 11.26" x 11.26"
- Weight: 16 LBS;
- Power Supply: 18V , 2.5A; 110V



PIPDSP20

iPod/iTouch/iPhone Audio Docking Portable Speaker System

- High Grade Speaker and Digital Amplifier for Superior Sound Quality
- Side Air Vent for Optimal Bass
- Elegant Cloth with Aluminum Trim Panel Design
- Slide Out Rear Stand for Added Support and Comfortable Use
- Side Up Back Support for Extra Safe Device Docking/Support
- Plays and Charges most iPods, iPod Touch and iPhone
- Fast 1A Charging for iPhone
- AC Operation using Separate AC-Adaptor (Included)
- Top Panel Electronic Volume Controls
- Low Power Consumption with Smart Auto-Off/On Power
- Optional Travel Carry Case for Portability



NEW FOR 2011

iPod not included

PIPDSP30

iPad & iPod Audio-Video Docking Media Center

- High Grade Brushed Aluminum and Piano Black Finishing
- Dual Color LED Power Indicator
- Adjustable Back Support Stand
- Weighted Base Unit for Sturdy Placement
- Slide Out Support Rear Stand for Added Support
- Multifunction iPhone/iPad AV Docking System
- 2.1A Super Fast Charge for All iPods, iPod Touch, iPhones and iPad
- Component Video Out, Direct 720P HD Video to External T.V. Screens
- Composite (RCA) Video Out Also Included for Older TV's
- Video Cables (Composite & Component) Included
- Audio Line Output (RCA L+R) to Connect to Existing Hi-Fi Systems
- Audio RCA Cable Included
- AC Operation using Separate AC-Adaptor (Included)
- Full Ergonomic Wireless Remote Control



NEW FOR 2011

iPod not included

PIPHD50

iPad & iPod 2.1 Channel Premium Desktop Speaker+Docking System with Built-In Subwoofer & Alarm Clock

- Purist Mololithic Design High Power Speaker+Docking System
- Brushed Aluminum + Piano Black High Grade Finishing
- Active Subwoofer Built In for Extra High Bass
- 3D Acoustic Sound Effect Processor Built-In
- Digital Clock with Alarm Timer
- Ergonomic iPad Dock Platform, Apple "Made for iPad" License
- FM-Stereo PLL Tuner with Station Memory Presets
- USB (1.1 & 2.0) and SD/MMC Card Slot for MP3 Playback
- Wide Screen Multifunction LCD Display
- Plays and Charges most iPods, iPod Touch, iPhones and iPad
- Digital Alarm Timer - Wake to iPad/iPhone/iPod/USB/SD-Card/Tuner
- AUX-In Jack (Audio Line Input) for External MP3 Player Connection
- Component Video-Out Jack for 720P HD Playback From most iPods, iPod Touch, iPhones and iPad
- External AC-Power Supply, 2.1A Super Fast Charging for iPhone/iPad
- Full Function Heavy Alloy Metal Wireless Remote Control



NEW FOR 2011

iPad not included

PIPHDSB 10

iPad & iPod Desktop Speaker Bar System With Built In Dual Passive Subwoofers

- Futuristic Slim Line Speaker Bar System
- Brushed Aluminum with Piano Black High Grade Finishing
- Built-In Dual Passive Subwoofers for High Bass
- Digital Clock with Alarm Timer
- Large Multifunction Reverse White BackLit LCD Display
- FM-Stereo PLL Tuner with Station Memory Presets
- Plays and Charges most iPods, iPod Touch, iPhones and iPad
- Dock Cavity Designed to Fit iPad
- Apple certified for "Made for iPad" & "Made for iPhone" Licensing
- Digital Alarm Timer - Wake to iPad/iPhone/iPod/Tuner
- AUX-In Jack (Audio Line Input) for External MP3 Player Connection
- Composite Video-Out Jack for Playback From iPod, iPhone and iPad
- External AC-Power Supply 2.1A Super Fast Charging for iPhone/iPad
- 3.5 mm Stereo Line-In Jack & DC Jack Built-In
- Full Function Ergonomic Wireless Remote Control



NEW FOR 2011

iPad not included

PIWPD3

Wireless Speaker iPhone/ iPod Docking

- 3 transmission channels for low interference
- Automatic tuning on speakers
- 100 feet Transmission Range
- Works with iPhone function
- Charger for iPhone function
- Charger for iPhone/iPod
- Built-in rechargeable lithium batteries recharges
- By connecting to main base station
- 3.5mm Aux-in jack
- Output power:3W*2 (RMS)
- Power source:9V DC
- AC power adaptor included



NEW FOR 2011

iPod not included



Product Line

PIP0SP2B

Ipod/iPad Touch Screen Dock With Built-In FM Radio/Alarm Clock (Black)

- iPod/iPhone/iPad input
- Line in Input
- Built in FM Radio
- Component Video out
- Alarm/Clock Control
- 2.0 Channel Amplifier
- Fully function Remote Control
- iPod/iPhone/iPad controlled by remote control
- iPod/iPhone/iPad charged automatically
- LCD display
- Synchronize with iTunes on the personal computer
- When iPhone/iPod/iPad is Connected
- Touch Panel control system
- Amplified 2 Speaker Stereo Output
- Frequency: 80Hz-20kHz
- S/N: 88dB
- THD: 0.1%
- Size: 13.58" x 13.58" x 6.80"



PHST90IBGL

600 Watt Digital 2.1 Channel Home Theater Tower w/ iPod Docking Station - Piano Wood Finish

- iPod/iPhone/MP3/AUX Input
- Built-in FM Radio With Memory
- Alarm Clock Control and Time
- 2.1 Channel amplifier
- Real 2.1 Channel output
- Full Function Remote Control
- Independent Control of Each Channel
- iPod/iPhone Can be Controlled Through Remote
- iPod/iPhone Charged Automatically
- Touch Key Control System
- LCD display
- Output power:600 Watts
- L (150Watts x 1) R (150Watts x 1)
- Subwoofer (300Watts x 1)
- Frequency: L,R 150Hz-20kHz Subwoofer 50Hz-180Hz
- Mid Range Driver:Dual 3.5 Inch
- Tweeter:Dual 3.5 inch
- Subwoofer: 8 inch
- S/N: 85dB
- THD: 0.1%
- Wood Construction w/ Beautiful Exterior
- Power: DC 21 Volts w/ 110V Adapter
- Dimensions: 5.43"D x 17.3"W x 40.15"H
- iPod not included



PHST92IBGL

600 Watt Digital 2.1 Channel Home Theater Tower w/ iPod & iPhone Docking Station - Piano Wood Finish

- iPod/iPhone/MP3/AUX Input
- Built-in FM Radio With Memory
- Alarm Clock Control and Time
- 2.1 Channel amplifier
- Real 2.1 Channel output
- Full Function Remote Control
- Independent Control of Each Channel
- iPod Can be Controlled Through Remote
- iPod Charged Automatically
- Touch Key Control System
- LCD display
- Output power:600 Watts
- L (150Watts x 1) R (150Watts x 1)
- Subwoofer (300Watts x 1)
- Frequency: L,R 150Hz-20kHz Subwoofer 50Hz-180Hz
- Mid Range Driver:Dual 3.5 Inch
- Tweeter:Dual 3.5 inch
- Subwoofer: 8 inch
- S/N: 85dB
- THD: 0.1%
- Wood Construction w/ Beautiful Exterior
- Power: DC 21 Volts w/ 110V Adapter
- Dimensions: 7.48"D x 11.42"W x 39.37"H
- iPod not included



PIWIPDK I

Ipod/iPhone In-Wall Mounted Audio/Video Docking Center w/Wireless Remote

- Remote control system
- The unit has S-Video output For Ipod/iPhone Playback On a Monitor
- Provides a balanced RCA audio output
- Supports IR control
- Built-in IR receiver
- Strong construction and protective cover
- Charges All Ipods and iPod/iPhone
- You Can view any iPod/iPhone videos on a TV

NEW FOR 2011



iPod Touch Sold Separately

PIP10

Portable Speaker System For Ipod & Any Other MP3 Player

- Output Power: 2 x 20W
- 1.5 inches Magnetically Shield Full Range Driver
- 5 Volt Convenient Switching Adapter from 110V to 220V Included, UL/ CU or CE/ GS Listed
- Power Volume Controls
- Convenient 4 AAA Battery Compartment
- Set of Speakers
- User Manual
- 110-220V Switching Adapter
- 3.5mm to 3.5mm Audio Cable Included
- Three Ipod Holders
- Carry Bag
- Folded Dimensions: 9.1" x 1.5" x 2.4"
- Unfolded Dimensions: 9.1" x 3.2" x 4.3"
- Weight: 1.4 LB
- Color: White



PIP20

Portable Speaker System for MP3 Devices

- Output Power 2 x 20W
- 1.5" Magnetically Shield Full Range Driver
- 5 Volt Adaptor 110/ 220 V
- UL/ CU/ CE/ GS Approved
- Power Volume Controls
- Uses 4 AAA Batteries not Included
- 3.5mm to 3.5mm Audio Cable
- 3 Ipod Holders
- Carrying Bag
- Folded Dimensions 9.1" x 1.5" x 2.4"
- Unfolded Dimension 9.1" x 3.2" x 4.3"



PMNP2B

Mini High Volume Portable Rechargeable Speaker System For iPod, MP3 Players, & Mobile Phones

- Rechargeable Li-ion Built In
- 10 Watts RMS Amplification
- High Volume - Low Distortion
- USB Charging Interface
- Works With Any Device w/ Audio Out
- Powerful and Portable
- Blue/Purple Indicator LED
- Individual On/Off Switches
- Silver Polypropylene Cone
- Rubber Cone Suspension
- Full Range 1.6" Speakers
- Available in Silver and Black
- Speaker Dimensions - 2.5" x 2.35" x 2.25"

NEW FOR 2011



PMNP2S

Mini High Volume Portable Rechargeable Speaker System For iPod, MP3 Players, & Mobile Phones

- Rechargeable Li-ion Built In
- 10 Watts RMS Amplification
- High Volume - Low Distortion
- USB Charging Interface
- Works With Any Device w/ Audio Out
- Powerful and Portable
- Blue/Purple Indicator LED
- Individual On/Off Switches
- Silver Polypropylene Cone
- Rubber Cone Suspension
- Full Range 1.6" Speakers
- Available in Silver and Black
- Speaker Dimensions - 2.5" x 2.35" x 2.25"

NEW FOR 2011



PMS5DB

Bass Expanding Rechargeable Dual Mini Speakers for iPod/MP3 (Black)

- Plays all iPod/iPhone models and other audio Devices with 3.5-mm audio jack
- Perfect replacement for laptop speakers
- Unique vacuum bass design for surprising Volume and bass response
- Fits in your Hand / Pocket for ultimate portability
- Built in li-ion rechargeable batteries
- Frequency response 100HZ-20KHZ
- Battery Charge time:DC 5V 200MAH-300 MAH Around 2.5 hours;USB 4 hours
- Plays On Fully Charged 8 hours
- Dimensions:2" D x 1.4" W x 2.2"H
- Color: Black

NEW FOR 2011





Product Line

PMS2B

Bass Expanding Rechargeable Mini Speakers for iPod/iPhone/MP3 (Black)

- Plays all iPod/iPhone models and other audio Devices with 3.5-mm audio jack
- Perfect replacement for laptop speakers
- Unique vacuum bass design for surprising Volume and bass response
- Fits in your Hand / Pocket for ultimate portability
- Built in li-ion rechargeable batteries
- Frequency response 100HZ-20KHZ
- Battery Charge time:DC 5V 200MAH-300 MAH Around 2.5 hours; USB 4 hours
- Plays On Fully Charged 8 hours
- Dimensions:2" D x 1.4" W x 2.2"H
- Color: Black



PMS6B

Bass Expanding Chainable Rechargeable Mini Speakers For iPod/iPhone/MP3 (Black)

- Works With All iPod/iPhone Models And Other Audio Devices With 3.5mm Audio Jack
- Daisy-Chain Multiple Speakers Together For A Huge Sound
- Perfect Replacement For Laptop Speakers
- Unique Vacuum Bass Design For Surprising Volume And Bass Response
- Fits In Your Hand Or Pocket For Ultimate Portability
- Built In Li-Ion Rechargeable Batteries - Lasts Up To 4 Hours
- Frequency Response: 280 Hz - 16 kHz
- Battery Charge Time: DC 5V 200MAH-300 MAH Around 2.5 Hours; USB 4 Hours
- Power Output: 10 W
- Dimensions: 2.55" X 2.17" X 1.26"
- Color: Black



PMS7B

Bass Expanding Chainable Rechargeable Mini Speakers For iPod/iPhone/MP3 (Black)

- Works With All iPod/iPhone Models And Other Audio Devices With 3.5mm Audio Jack
- Daisy-Chain Multiple Speakers Together For A Huge Sound
- Perfect Replacement For Laptop Speakers
- Unique Vacuum Bass Design For Surprising Volume And Bass Response
- Fits In Your Hand Or Pocket For Ultimate Portability
- Built In Li-Ion Rechargeable Batteries - Lasts Up To 4 Hours
- Frequency Response: 280 Hz - 16 kHz
- Battery Charge Time: DC 5V 200MAH-300 MAH Around 2.5 Hours; USB 4 Hours
- Power Output: 10 W
- Dimensions: 3.03" x 2.18" x 1.49"
- Color: Black



PMS8B

Bass Expanding Chainable Rechargeable Mini Speakers For iPod/iPhone/MP3 (Black)

- Works With All iPod/iPhone Models And Other Audio Devices With 3.5mm Audio Jack
- Daisy-Chain Multiple Speakers Together For A Huge Sound
- Perfect Replacement For Laptop Speakers
- Unique Vacuum Bass Design For Surprising Volume And Bass Response
- Fits In Your Hand Or Pocket For Ultimate Portability
- Built In Li-Ion Rechargeable Batteries - Lasts Up To 4 Hours
- Frequency Response: 280 Hz - 16 kHz
- Battery Charge Time: DC 5V 200MAH-300 MAH Around 2.5 Hours; USB 4 Hours
- Power Output: 10 W
- Dimensions: 2.55" X 2.17" X 1.26"
- Color: Black



PMS8R

Bass Expanding Chainable Rechargeable Mini Speakers For iPod/iPhone/MP3 (Red)

- Works With All iPod/iPhone Models And Other Audio Devices With 3.5mm Audio Jack
- Daisy-Chain Multiple Speakers Together For A Huge Sound
- Perfect Replacement For Laptop Speakers
- Unique Vacuum Bass Design For Surprising Volume And Bass Response
- Fits In Your Hand Or Pocket For Ultimate Portability
- Built In Li-Ion Rechargeable Batteries - Lasts Up To 4 Hours
- Frequency Response: 280 Hz - 16 kHz
- Battery Charge Time: DC 5V 200MAH-300 MAH Around 2.5 Hours; USB 4 Hours
- Power Output: 10 W
- Dimensions: 2.55" X 2.17" X 1.26"
- Color: Red



PMSU1B

Bass Expanding Mini Speaker With Built-In USB SD Card Reader volume control Remote Controller For Ipod/iPhone/Laptops/Computers/Mp3 Players (Color Black)

- Plays all iPod/iPhone models and other audio Devices with 3.5-mm audio jack
- Custom-tuned vacuum bass design for low Frequency response and sound beyond size
- Fits in your Hand / Pocket for ultimate portability
- Built in li-ion rechargeable batteries
- Contains built-in amplifier powered By rechargeable battery
- Play Music From USB Drivers Or MINI SD/MMC Cards
- Slim Design for easy Transport
- Volume +/- Button, Easy To Adjust Volume Rechargeable battery, which can support MP3 player and charger to other device
- Card Reader: Mini SD/MMC card Support And USB Port
- Full Function Remote Controller
- Color: Black
- Dimensions: 2.1"D x 1.6"W x 2.5"H
- A total audio solution, the sleekly designed Mini Speaker not only operates as a speaker is now also A mobile music player which doubles up as an SD/SDHC card reader.
- Engineered to be user-friendly one button serves to Control all functions which include power Volume pause and track change.
- The Pyle Mini Bass Expanding Speaker guarantees A tuneful journey for the world's burgeoning Population of music enthusiasts



PMSU1R

Bass Expanding Mini Speaker With Built-In USB & SD Card Reader (Red)

- Plays all iPod/iPhone models and other audio Devices with 3.5-mm audio jack
- Custom-tuned vacuum bass design for low frequency Response and sound beyond size
- Fits in your Hand / Pocket for ultimate portability
- Built in li-ion rechargeable batteries
- Built-in amplifier powered by rechargeable battery
- Play Music From USB Drivers Or SD/MMC Cards
- Slim Design for easy Transport
- Volume +/- Button, Easy To Adjust Volume
- Battery can support MP3 player
- Card Reader: Mini SD/MMC card Support And USB Port
- Full Function Remote Controller
- Color: Red
- Dimensions: 2.1"D x 1.6"W x 2.5"H



PMSU1W

Bass Expanding Mini Speaker With Built-In USB & SD Card Reader (White)

- Plays all iPod/iPhone models and other audio Devices with 3.5-mm audio jack
- Custom-tuned vacuum bass design for low frequency Response and sound beyond size
- Fits in your Hand / Pocket for ultimate portability
- Built in li-ion rechargeable batteries
- Built-in amplifier powered by rechargeable battery
- Play Music From USB Drivers Or SD/MMC Cards
- Slim Design for easy Transport
- Volume +/- Button, Easy To Adjust Volume
- Battery can support MP3 player
- Card Reader: Mini SD/MMC card Support And USB Port
- Full Function Remote Controller
- Color: White
- Dimensions: 2.1"D x 1.6"W x 2.5"H





Product Line

PVR825

Basic Digital Voice Recorder

- Micro SD Card Slot Ready (Support up to 16GB)
- Recording Time For 2GB Up to 400 Hours (LP Mode)
- 2 Recording Mode Selection (HP/LP)
- 4 Message Folders Selection
- Each Folder Contains 99 Messages For A Total 396 Messages
- VOX (Voice Activity System) On/Off
- Built-In Microphone & Speaker
- Built-In External Mic Jack & Ear Phone Jack
- Hold On/Off
- Full Function LCD display
- Repeat Function
- Accessories: Earphone
- Power: 1x "AAA" Batteries (Not Including)
- Dimension: 4.5 x 0.9 x 0.5 Inches



PHPW2

FM Hi-fi Wireless Headphones with Extreme Bass

- Wireless Reception from TV
- Wired Reception to Mp3 Player
- FM Radio and Wired Reception from PC, CD, DVD Players
- Reception Frequency Range: 85MHz~108MHz
- Driver Size: 40mm
- Sensitivity (S.P.L): 105dB±3dB/MW (at 1 KHz)
- Impedance: 32 Ohms ± 15%
- Frequency Response: 20~20,000Hz
- Signal/Noise Ratio: >50dB
- Headphone: DC 3V (2x1.5V AAA batteries)
- Transmitter: DC 3V (2x1.5V AAA batteries)
- Maximum operation distance: 100FT, 360°



PHA15

3.5mm / 1/8" Mono Audio Amplifier

- 3.5mm / 1/8" Male Audio Input
- 1 Channel Speaker Audio Output
- 1 RMS Audio Output 1 Peak Audio Output
- 4 Ohm Stable
- Designed for use with all audio players with 3.5mm /1/8" audio outputs mp3, Ipod, etc.



PHA25

3.5mm / 1/8" 2 Channel Stereo Audio Amplifier

- 3.5mm / 1/8" Male Audio Input
- 2 Channel Speaker Audio Output
- 1 RMS Audio Output /1 Peak Audio Output
- 4 Ohm Stable
- Designed for use with all audio players with 3.5mm /1/8" audio outputs mp3, Ipod, etc.



PHA40

4 Channel Stereo Headphone Amplifier

- Power On LED Indicator
- Stereo Headphone Output Level Controls
- Stereo Headphone 1/4" TRS Output Jacks
- Stereo 1/4" TRS Source Input Jack
- 12V/150mA DC Power Supply Included
- Dimensions: 4.07" W x 1.18" H x 2.24" D



PHA80

4 Channel Stereo Headphone Amplifier w/ LED Level Indicators

- Power On Button With LED Illumination
- Stereo Headphone Output Level Controls
- Headphone Input Channel Selector A/B With LED Illumination
- Stereo Headphone 1/4" TRS Output Jacks, Front
- Stereo Headphone 3.5mm Output Jacks
- Channel Headphone Output Level LED Meters
- Channel Source Input Balance Controls
- Channel Source Input Level Controls
- Channel Source Input Level LED Meter (A+B)
- Stereo Headphones 1/4" TRS Output Jacks, Rear
- Link Out A Connectors
- 1/4" TRS Source Balanced Input Jacks CH-A/CH-B
- 9V/750mA DC Power Supply Included
- Dimensions: 10" W x 1.77" H x 4.25" D



PEBH25BK

Ultra Slim In-Ear Ear-Buds Stereo Bass Headphones For Ipod/MP3/All Audio source Players (Black)

PEBH25BL

Ultra Slim In-Ear Ear-Buds Stereo Bass Headphones For Ipod/MP3/All Audio source Players (Blue)

PEBH25WT

Ultra Slim In-Ear Ear-Buds Stereo Bass Headphones For Ipod/MP3/All Audio source Players (White)

- Compatibility:IPod/Iphone/Zune/Sansa Models, As Well As Any Audio Playback Device With A 3.5-Millimeter Jack
- Mini Retractable Earbud Set
- Impedance: 32 Ohms
- Sensitivity: 105dB S.P.L at 1 KHz
- Frequency Response: 20Hz~20,000Hz
- Cable Length: 4Ft
- Plug Type: 3.5mm Stereo Plug
- Color:Black



PIEH30B

Ultra Slim In-Ear Ear-Buds Stereo Bass Headphones For Ipod/MP3/All Audio source Players (Black)

PIEH30W

Ultra Slim In-Ear Ear-Buds Stereo Bass Headphones For Ipod/MP3/All Audio source Players (White)

- 3 Sizes Of Soft Silicone Ear Buds For A Super Comfortable, Noise Reducing Fit
- Compatibility:IPod/Iphone/Zune/Sansa Models, As Well As Any Audio Playback Device With A 3.5-Millimeter Jack
- Impedance: 32 Ohms
- Sensitivity: 105dB S.P.L at 1 KHz
- Frequency Response: 20Hz~20,000Hz
- Cable Length: 4Ft
- Plug Type: 3.5mm Stereo Plug
- Color: Black



PIEH10B

Ultra Slim In-Ear Ear-Bud's Stereo Bass Headphones For Ipod/MP3/All Audio source Players (Black)

PIEH10W

Ultra Slim In-Ear Ear-Bud's Stereo Bass Headphones For Ipod/MP3/All Audio source Players (White)

- 3 Sizes Of Soft Silicone Ear Buds For A Super Comfortable, Noise Reducing Fit
- Compatibility:IPod/Iphone/Zune/Sansa Models, As Well As Any Audio Playback Device With A 3.5-Millimeter Jack
- Handcrafted Aluminum Housing And Titanium Drivers For Unparalleled Clarity And Definition
- Impedance: 32 Ohms
- Sensitivity: 105dB S.P.L at 1 KHz
- Frequency Response: 20Hz~20,000Hz
- Cable Length: 4Ft
- Plug Type: 3.5mm Stereo Plug
- Color: Black



PHRT32BK

Ultra-Compact Retractable In-Ear Ear-Buds Stereo Bass Headphones(Black)

PHRT32WT

Ultra-Compact Retractable In-Ear Ear-Buds Stereo Bass Headphones(White)

- Compatibility:IPod/Iphone/Zune/Sansa Models, As Well As Any Audio Playback Device With A 3.5-Millimeter Jack
- Mini Retractable Earbud Set
- Impedance: 32 Ohms
- Sensitivity: 105dB S.P.L at 1 KHz
- Frequency Response: 20Hz~20,000Hz
- Cable Length: 4Ft
- Plug Type: 3.5mm Stereo Plug
- Color:Black





Product Line

PIEH40B

Ultra Slim In-Ear Ear-Buds Stereo Ultra Super Bass Headphones For Ipod/MP3/All Audio source Players (Black)

PIEH40P

Ultra Slim In-Ear Ear-Buds Stereo Ultra Super Bass Headphones For Ipod/MP3/All Audio source Players (Pink)

PIEH40T

Ultra Slim In-Ear Ear-Buds Stereo Ultra Super Bass Headphones For Ipod/MP3/All Audio source Players (Tan)

PIEH40W

Ultra Slim In-Ear Ear-Buds Stereo Ultra Super Bass Headphones For Ipod/MP3/All Audio source Players (White)

- 3 Sizes Of Soft Silicone Ear Buds For A Super Comfortable, Noise Reducing Fit
- Compatibility: IPod/Iphone/Zune/Sansa Models, As Well As Any Audio Playback Device With A 3.5-Millimeter Jack
- Handcrafted Aluminum Housing And Titanium Drivers For Unparalleled Clarity And Definition
- Impedance: 32 Ohms
- Sensitivity: 105dB S.P.L at 1 KHz
- Frequency Response: 20Hz~20,000Hz
- Cable Length: 4Ft
- Plug Type: 3.5mm Stereo Plug



PIEHIP20BK

Ultra Slim In-Ear Ear-Buds Stereo Ultra Bass Headphones/Microphone For Ipod/Iphone (Black)

PIEHIP20BL

Ultra Slim In-Ear Ear-Buds Stereo Ultra Bass Headphones/Microphone For Ipod/Iphone (Blue)

PIEHIP20S

Ultra Slim In-Ear Ear-Buds Stereo Ultra Bass Headphones/Microphone For Ipod/Iphone (Silver)

PIEHIP20P

Ultra Slim In-Ear Ear-Buds Stereo Ultra Bass Headphones/Microphone For Ipod/Iphone (Pink)

PIEHIP20W

Ultra Slim In-Ear Ear-Buds Stereo Ultra Bass Headphones/Microphone For Ipod/Iphone (white)

- 3 Sizes Of Soft Silicone Ear Buds For A Super Comfortable, Noise Reducing Fit
- Built-in Microphone For Iphone Talk Back
- Compatibility: IPod/Iphone/Zune/Sansa Models, As Well As Any Audio Playback Device With A 3.5-Millimeter Jack
- Handcrafted Aluminum Housing And Titanium Drivers For Unparalleled Clarity And Definition
- Impedance: 32 Ohms
- Sensitivity: 105dB S.P.L at 1 KHz
- Frequency Response: 20Hz~20,000Hz
- Cable Length: 4Ft
- Plug Type: 3.5mm Stereo Plug



PIEHWDBOLT

Wood-Bud Wooden In-Ear Ear-Buds Stereo Ultra Bass Headphones (Red Mahogany)

- Compatibility: IPod/Iphone/Zune/Sansa Models, As Well As Any Audio Playback Device With A 3.5-Millimeter Jack
- Wood-Buds Features Wood Housing For Deep Bass Performance
- Impedance: 32 Ohms
- Sensitivity: 105dB S.P.L at 1 KHz
- Frequency Response: 20Hz~20,000Hz
- Cable Length: 4Ft
- Plug Type: 3.5mm Stereo Plug
- Color: Red Mahogany



PWPE10B

Waterproof Marine Headphones Earbuds compatible w/ MP3 players & iPods (Black Color)

PWPE10W

Waterproof Marine Headphones Earbuds compatible w/ MP3 players & iPods (White Color)

- Waterproof Marine Earbuds for a Custom Fit
- Includes 3 Pairs of Different sized
- Frequency Response: 20-20,000Hz
- Impedance: 32 Ohms \pm 15%
- Sensitivity (S.P.L): 110dB \pm 4dB/mW (at KHZ)
- Maximum Input Power: 20mW
- Speaker Driver Diameter: \varnothing 10mm
- Plug Diameter: \varnothing 3.5mm golden-Plated Stereo Plug
- Cable Length: 4 ft.
- Compliant w/ IP7 Waterproof Standard



PDWM8300 Professional conference Desktop VHF Wireless Microphone System

- Professional VHF 8 Channel Wireless System
- Eight Table Top Microphones Included
- Dual Telescoping Receiver Antennas
- Eight Volume Controls
- On/Off Broadcasting Switch
- One mixed microphone output 1/4" and XLR jacks
- Carrier Frequency: 174MHz-216MHz
- Dynamic Range: 92dB
- Total Harmonic Distortion: 0.5%
- Frequency Response: 50Hz~16KHz
- Operation Range: 50-180 Meters
- Signal to Noise Ratio: 90dB
- Receiver Power Supply: AC 110/240V
- Microphone Power Source: 9 Volt
- Receiver Dimensions Without Rack Mount: 1.8" x 16.5" x 8.7"
- Receiver Dimensions With Rack Mount: 1.8" x 18.9" x 8.7"
- Microphone Dimensions: 12.7" X 4.9" X 5.9"



PDMIK6 Professional Table Top Condenser Microphone

- Adjustable Gooseneck Type Mast
- Cardioid Pickup Rejects Off-Axis Sound
- Durable Metal Tube and Bottom Base and PVC Plastic construction
- Frequency Response: 40Hz~14KHz
- 2.2K Ohm Output Impedance
- Microphone Sensitivity: -42db (+/-)2db
- Reference Sound Receiving Distance: 20~60cm
- Power Supply: DC 1.5 Volt x 2
- On/Off Broadcasting Switch
- 26.2 Foot XLR (F) - 1/4" (M) Microphone Cable with 600 Ohms Outputs



PDMIK5 Professional Table Top Condenser Microphone

- Adjustable Gooseneck Type Mast
- Cardioid Pickup Rejects Off-Axis Sound
- Durable Metal Tube And Bottom Base And PVC Plastic Construction
- Frequency Response: 40hz~16khz
- 200 Ohm Output Impedance
- Microphone Sensitivity: -40db (+/-)2dB
- Reference Sound Receiving Distance: 20~80cm
- Power Supply: Dc 9 Volt
- On/Off Broadcasting Switch
- 26.2 foot XLR (F) - 1/4" (M) Microphone Cable with 600 Ohms Outputs



PAMP1000 160 Watt Home Stereo Power Amplifier

- Power On/Off Switch & LED Indicator
- Speaker A/B Channel Selectors & LED Indicators
- Balance Control
- Volume Control
- Auto On Switch
- Auto Input Switching
- 2 Stereo Line Inputs
- 1 Stereo Line Output
- Stereo/Bridged Mode Selector
- Speaker A/B Binding Post Terminals
- Bridgeable Output
- Replaceable Fuse
- Unswitched 200W Max AC Outlet
- 110/220 Voltage Selector
- Detachable Power AC Input
- Dimensions: 16.5"W x 2.36"H x 8.2"D



PCA1 Mini 2X15 W Stereo Power Amplifier

- 2X15W 10% RMS At 4-Ohm
- Power On Led Indicator
- Master Volume Control
- RCA Cable L/R Input
- Four Push Type Speaker L/R Terminals
- Compatible With Any Audio/Computerize Devices
- (MP3) Via 3.5mm To RCA Converter.
- 110/220 Voltage Selector
- Dimensions: 5.61"(W) X 2.17"(H) X 4.21"(D)



PCA2 Mini 2x40W Stereo Power Amplifier

- 2x8W 1% THD and 2x40W MAX.
- POWER ON/OFF switch and LED indicator
- MASTER volume control
- TREBLE and BASS controls
- PUSH TYPE speaker output
- Compatible With Any Audio/Computerize Devices
- (MP3) Via 3.5mm To RCA Converter
- RCA jack input
- 110/220 VOLTAGE selector
- Dimensions: 6.3"W x 2.72"H x 4.72"D





Product Line

PCA3

Mini 2x75W Stereo Power Amplifier

- 2x15W 1% THD and 2x75W MAX.
- BLUE LED output level display
- POWER ON/OFF switch and LED indicator
- Compatible With Any Audio/Computerize Devices
- MP3)Via 3.5mm To RCA Converter
- MASTER volume control
- TREBLE and BASS controls
- PUSH TYPE speaker output
- RCA jack input
- 115/230 VOLTAGE selector
- Dimensions: 7.48"W x 2.87"H x 5.39"D



PCA4

Mini 2x120 Watt Stereo Power Amplifier

- 2x120W at 4 Ohm
- Blue LED Output Level Display
- Power on LED Indicator
- 3.5mm Aux CD/MP3 Input Jack
- Treble and Bass Control
- Master Volume Control
- RCA L/R Input
- Four Push Type Speaker L/R Terminals
- 110/220 Voltage Selector
- Dimensions: 8.27"W x 2.72"H x 5.39"D



PCAU11

Mini 2x15 Watt Stereo Power Amplifier w/ USB Input

- 2x15W RMS at 4-ohm
- Compatible w/ USB Memory Sticks & MP3 Files
- Power on LED Indicator
- USB Reader Function
- Master Volume Control
- RCA Cable L/R Input
- Four Push Type Speaker L/R Terminals
- 110/220 Voltage Selector
- Dimensions: 5.61"W x 2.17"H x 4.21"D



PCAU22

Mini 2x40 Watt Stereo Power Amplifier w/ USB Input

- 2x40W RMS at 4 Ohm
- Compatible w/ USB Memory Sticks & MP3 Files
- Power on LED Indicator
- Treble and Bass Control
- Master Volume Control
- RCA L/R Input
- Four Push Type Speaker L/R Terminals
- 110/220 Voltage Selector
- Dimensions: 6.30"W x 2.72"H x 4.72"D



PCAU33

Mini 2 x 75 Watts Stereo Power Amplifier With USB Input

- 2x75W 10% RMS at 4-ohm
- Blue LED Output Level Display
- Power on LED Indicator
- USB Reader Function
- Treble and Bass Controls
- Master Volume Control
- RCA L/R Input
- Four Push Type Speaker L/R Terminals
- Compatible with Walkman and Computerized Devices (MP3) via 3.5mm to RCA Converter
- 110/220 Voltage Selector
- Dimensions: 7.48"W x 2.87"H x 5.39"D



PCAU44

Mini 2x120 Watt Stereo Power Amplifier w/ USB & CD Input

- 2x120W RMS at 4 Ohm
- Compatible w/ USB Memory Sticks & MP3 Files
- Blue LED Output Level Display
- Power on LED Indicator
- 3.5mm Aux CD/MP3 Input Jack
- Treble and Bass Controls
- Master Volume Control
- RCA L/R Input
- Four Push Type Speaker L/R Terminals
- 110/220 Voltage Selector
- Dimensions: 8.27"W x 2.72"H x 5.39"D



PCM20A

40 Watt Power Amplifier w/ 25 & 70 Volt Output

- Power On/Off Switch & LED Indicator
- MIC 1 Output Level Control
- MIC 2 Output Level Control
- AUX Output Level Control
- Bass and Treble Tone Controls
- MIC 1 Front Located 1/4" Input Jack
- MIC 2 Front Located 1/4" Input Jack
- AUX Front Located 1/4" Input Jack
- MIC 1 Auto Talkover
- Speaker Terminals (COM/8-Ohm/25V/70V)
- Replaceable Fuse
- 110/220 Voltage Selector
- Detachable AC Power Input
- Dimensions: 7.87"W x 3.15"H x 5.9"D



PCM30A

60 Watt Power Amplifier w/ 25 & 70 Volt Output

- Power On/Off Switch & LED Indicator
- MIC 1 Output Level Control
- MIC 2/AUX Output Level Control
- Bass and Treble Tone Controls
- AUX RCA Input
- MIC 2/AUX Input Selector Switch
- MIC 1/MIC 2 Terminals (MIC 1 Auto Talkover)
- Mute Terminals
- Monitor 600-Ohm 1V Terminals (Music On Hold)
- Monitor 1W 8-Ohm Terminals (Music On Hold)
- Monitor Output Level Control (Music On Hold)
- TEL/PAGING Terminals
- Paging Output Level Control
- MIC/TEL VOX Level Control (Internal)
- Speaker Terminals (COM/4-ohm/8-Ohm/16-Ohm/25V/70V)
- Replaceable Fuse
- Unswitched 500W Max AC Outlet
- 110/220 Voltage Selector
- Detachable AC Power Input
- Dimensions: WxHxD: 10.7"W x 3.46"H x 8.86"D



PCM60A

100 Watt Power Amplifier w/ 25 & 70 Volt Output

- Power On/Off Switch & LED Indicator
- AUX 1/MIC 1 Output Level Control
- AUX 2/MIC 2 Output Level Control
- AUX 3/MIC 3 Output Level Control
- Bass and Treble Tone Controls
- Contour Control on/off Loudness Switch
- AUX RCA Output
- AUX 1/AUX2/AUX 3 RCA Input
- AUX/MIC Input Selector Switch
- Mute Terminals
- MIC 1/MIC 2/MIC 3 Terminals (MIC 1 Auto Talkover)
- TEL/PAGING Terminals
- Paging Output Level Control
- MIC/TEL VOX Level Control (Internal)
- MIC 1 XLR Connector
- MIC 1 VOX (Auto-Talkover) Switch
- Monitor 600-Ohm 1V Terminals (Music On Hold)
- Monitor 1W 8-Ohm Terminals (Music On Hold)
- Monitor Output Level Control (Music On Hold)
- Speaker Terminals (COM/4-ohm/8-Ohm/16-Ohm/25V/70V)
- Replaceable Fuse
- Unswitched 500W Max AC Outlet
- 110/220 Voltage Selector
- Detachable AC Power Input
- Dimensions: 16.93"W x 3.46"H x 10.51"D



PDSA 10

Mobile Powered DC 12 Volt 75 Watt PA Amplifier

- Power/Load Rating: 75Watts
- Power on/off with LED indicator
- Mic1 /Mic 2/ Aux volume controls
- Suggested Installs Car's, Buses, RV's, Parade Vehicles, EMS, etc.
- DC 12V Powered
- Mounting brackets included
- Dimensions: 2.2" H x 6.5" W x 7.9"D



PMSA20

50 Watt PA Mini Amplifier

- 50 Watts RMS
- Impedance 4/8 ohms
- Power On/Off Switch with LED indicator
- MIC 1 / MIC 2/ AUX 1/4" Inputs
- Individual Volume Controls
- Removable AC Cord
- Power Input: AC 110V 60HZ
- Power Input: DC 12V Inlet
- Mounting Brackets Included
- Dimensions: 2.5"H x 8"W x 7.9"D





Product Line

PMZ300A

90x4 Watt Multi Source & Zone Power Amplifier w/ 25 & 70 Volt Output

- Power On/Off Switch & LED Indicator
- Master (Monitor) LED Output Level Meter
- Master (Monitor) Volume Control
- Headphones Volume Control
- Headphones Output Jack
- Zone LED Output Level Meters
- Zone Monitor Assign Selectors
- Zone Volume Controls
- Zone Assign Selectors
- Mute Switches and LED Indicators
- Volume Controls
- Gain Controls
- Tone Controls
- Monitor Line Out Terminals
- Monitor 1W 8-Ohm Terminals
- Priority Terminals
- TEL/PAGING Terminals
- TEL/ZONE Switch and Volume Control
- CH1/CH2/CH3 Input Selectors
- CH1/CH2/CH3 Mono MIC/LINE Input COMBO Connectors
- CH4/CH5 RCA Line Input Connectors
- Line Out (ZONE) Terminals (Balanced/Unbalanced)
- Speaker Terminals (COM/4-ohm/8-Ohm/25V/70V)
- Cooling Fan
- Replaceable Fuse
- 110/220 Voltage Selector
- Detachable AC Power Input
- Dimensions: 19"W x 5.19"H x 10.7"D



PT110

80 WATT AC/DC Microphone PA Mono Amplifier w/ 70V Output & Mic Talkover

- 1/4" Phone Jack
- LED Level Display
- Master Volume Control
- Tone Control
- Mix Bus Jacks
- Front 3.5mm AUX CD Input Jack
- MIC 1/MIC 2 Talkover
- DC 12V Inlet
- Phono/Aux Volume Control
- Mic 1 Mic 2 Volume Controls
- Mic 1 Mic 2 6.35mm Connectors
- Voltage Selector 110/220V
- Removable AC Cord
- Unswitched AC Outlet
- Phono/Aux/RCA Input Jacks
- Phono/Aux Input Selector
- Variety of Speaker Outputs Terminal
- Dimensions: 3 1/3" H x 12 3/4" W x 8 9/10" D



PT210

120 WATT MICROPHONE PA Mono Amplifier w/70V Output & Mic Talkover

- Power On/Off with LED Indicator
- 1/4" Phone Jack
- LED Level Display
- Master Volume Control
- High/Mid/Low Tone Controls
- Front 3.5mm AUX CD Input Jack
- MIC 1 Talkover
- Phono/Aux Volume Control
- Mic 1 Mic 2 Volume Controls
- Mic 1 Mic 2 6.35mm Connectors
- Voltage Selector 110/220V
- Removable AC Cord
- Unswitched AC Outlet
- Mix Bus Jacks
- Phono/Aux/RCA Input Jacks
- Phono/Aux Input Selector
- Variety of Speaker Outputs Terminal
- Dimensions: 3 1/3" H x 12 3/4" W x 8 9/10" D



PT610

19" Rack Mount 600 Watt Power Amplifier/Mixer w/ 70V Output & Mic Talkover

- 5 Channel Mixer
- 4 Mic Inputs XLR & 1/4" Combo Jack
- 2 Line Inputs RCA
- CH4 Mic/Line Switchable
- Effects Loop RCA In/Out
- Front 3.5mm AUX CD Input Jack
- 4 ohm, 8 ohm, 16 ohm & 70V Screw Terminals
- 8 ohm 1/4" and Binding Post Outputs
- Illuminated VU Output Level Meter
- Feedback Filter with Rotary Control
- MIC 1 Talkover
- Headphone Output
- Rotary Channel & Master Level Controls
- Thermal Overload Protection w/ Indicator
- Clip LED Indicator
- Ground Screw
- 2U Rack Mountable
- 110/220 Voltage Selector
- Dimensions: 4 3/16"H x 19.0"W x 12"D
- Weight: 22.3 lbs



PT710

19" Rack Mount 2000 Watt PA Amplifier with 3 Way Frequency Selectors

- Three XLR Microphone Input Jack with Sensitivity Selector (25dB, 35dB, 45dB) and Frequency Selector (200, 300, 400)
- Three Line Input (RCA / 1/4" TPS Balanced Jack / 3.5mm Input Jack) with Frequency Selector (50Hz, 100Hz, 200Hz)
- Three Output (one RCA, two 1/4" TPS Balanced Jack)
- 80 Watts RMS @ 8 Ohms
- 120 Watts RMS @ 4 Ohms
- 2000 Watts Peak @ 4 Ohms
- S/N: 102dB
- Master Volume/Low/High Control for main Channel
- MIC Volume Control with Frequency Selector (500, 1K, 3K, 7K, 10K) +-15dB Special Frequency Volume Provider Selector
- Repeat/Echo/Delay Control for Microphone Echo
- 3 Combo Microphone Inputs XLR / 1/4" Jacks
- +18 Volts Phantom Power Switch
- 3 Gain/Sensitivity Microphone Input Selector (25db-35db-45db)
- Echo Delay Repeat Controls For Microphone Inputs
- 2 RCA Plug Line Level Input
- 1 x 1/4" TPS Balanced Audio Input
- 3 x Microphone Inputs With Frequency And Sensitivity Controls
- 3.5 mm Aux Audio Input
- L.E.D. Level Meter Output
- Send And Return Jacks 1/4"
- 2 RCA Audio Record Line Output
- Line Bass And Treble Controls
- Master Volume Control
- 2 Channels Or Bridged Speaker Output
- Cooling Fan
- Rack Mount Brackets
- 110V/220V Switch-able Power Source
- Dimensions: 19"w X 3.1"h X 12"d
- Weight: 14.3 Lbs



NEW for 2011

PT910

19" Rack Mount 1200 Watt Stereo Power Amplifier/Mixer w/ 70V Output

- 5 Channel Mixer
- 4 Mic Inputs XLR & 1/4"
- 1 Stereo Line Input 1/4" & RCA
- 1 Mono Line Input RCA
- 1 Stereo Phono Input RCA with Ground Screw
- Effects Loop RCA In/Out
- Mix Bus Jack to Connect Another PT910
- Stereo/Mono Selector
- A/B Speaker Selector
- Stereo or Bridged Power into 4 or 8 Ohms
- 70V Output (Mono)
- Binding Post Outputs
- L/R Master Volume Controls w/Blue LED's
- Feedback Filter with Rotary Control
- Thermal Overload Protection with Indicator
- Clip LED Indicator
- Heavy Duty Fan Cooling
- Blue LED Level Display
- Headphone Output
- Frequency Response: 10-50 kHz \pm 3dB
- 110/220V Switchable
- Dimensions: 5 3/8" H x 19" W x 14 7/16" D
- Weight: 27 lbs



PT720A

1000 Watts AM/FM/ Tuner Hybrid Amplifier W/ 70V Output w/Built In Auto Mute Function And Music On Hold Output

- 1000 Watts Peak Power
- 450 watts @ 2 ohms
- 360 watts @ 4 ohms
- 200 watts @ 8 ohms
- IPOD/MP3 Input With 3.5MM Cable
- 110-220V Switchable
- Digital Fluorescent Output Display Meter
- AM/FM Quartz Synthesized Tuner
- Auto Scan, PRE/NEXT/MEMORY/STORE For Radio Stations, 50 Stations Storage
- Removable Rack-Mount Brackets
- Auto Mute Function And Music On Hold Output With Separate Level Control
- All Blue LED's /Lights Gain Control Through LED DIMMER
- Remote Control Included



PT8000CH

19" Rack Mount 8000 Watt 8 Channel Stereo/Mono Amplifier

- 1000 Watts Peak x 8 Channel Output
- Five Color LED Display Graphic Volume Display
- 4 Channel Capable Bridgeable Amplifier
- Independent Channel Level Controls
- Each Channel can be set is a Left/Right/Mono Of the Bus/AUX Input
- Adjoining Channels are Bridgeable
- Individual Channel protection circuitry.
- DC 12 Volt Control Output Allows For Remote Trigger Of Auxiliary Devices
- Pass Through Output Allows Linking (Daisy-Chaining) of Additional Amplifiers
- 5 Way Speaker Binding Posts (Banana Plug) Outputs
- 4U Rack Space
- Dimension: 19"W x 19.3"D x 7.1"H
- Weight: 48.5 LBS



PT1100

1000 Watt Power Amplifier

- 1000 watts peak power
- 450 watts @ 2 ohms
- 360 watts @ 4 ohms
- 200 watts @ 8 ohms
- Inputs: RCA (4 audio sources)
- 1 RCA dedicated for record line output
- Two Microphones Input Jacks
- Master Volume Controls w/Blue LED
- Heavy Duty Fan Cooling
- A/B Speaker Selector
- Removable rack-mount brackets
- 3U Height w/ Remote
- 110-220V Switchable
- Dimensions: 19"W x 5.1"H x 12.1"D
- Weight: 14.3 lbs (6.5 kg)



PT3300

3000 Watt Power Amplifier

- 3000 watts peak power
- 800 watts @ 2 ohms
- 550 watts @ 4 ohms
- 300 watts @ 8 ohms
- Inputs: RCA (4 audio sources)
- 1 RCA dedicated for record line output
- Two Microphones Input Jacks
- Master Volume Controls w/Blue LED
- Heavy Duty Fan Cooling
- A/B Speaker Selector
- Removable rack-mount brackets
- 3U Height w/Remote
- 110-220V Switchable
- Dimensions: 19"W x 5.1"H x 12.1"D
- Weight: 15.4 lbs (7 kg)





Product Line

PTA1

Mini 2X15W Stereo Power Amplifier

- 2x3W 1% THD and 2x15W MAX.
- POWER ON/OFF switch and LED indicator
- AUX/CD input and selector
- PHONES output
- MIC 1/4" jack input and volume control
- MASTER volume control
- BALANCE control
- PAGER-MIXING selector
- PUSH TYPE speaker output
- 115/230 VOLTAGE selector
- Dimensions 7.48"W x 2.76"H x 5.39"D



PTA2

Mini 2X40W Stereo Power Amplifier

- 2X40W Max 10% RMS At 4-Ohm
- Power On LED Indicator
- Music Volume Control
- Head Phones Output Jack
- 1/4" Mic Input Jack
- Switchable Mic Pager And Mixing Modes
- Switchable RCA Input AUX1/AUX2/CD
- RCA REC Output
- Bass And Treble Tone Control
- Balance Control
- Mic Volume Control
- Four Push Type Speaker L/R Terminals
- 110/220 Voltage Selector
- Dimensions: 7.48"W x 2.76"H x 5.39"D



PTA3

Mini 2x75w Stereo Power Amplifier

- Pager-Mixing Function
- 2x15W 1% THD and 2x75W MAX Power Output
- BLUE LED output level display
- POWER ON/OFF switch and LED indicator
- AUX1/AUX2/CD input and selector
- PHONES output
- Balance Control
- 1/4" Mic Input
- MIC 1/4" jack input and volume control
- MASTER volume control
- BALANCE control
- PAGER-MIXING selector
- 6 Audio Rca Inputs (Aux1 Aux2 Cd)
- Rca Rec Output
- BASS/TREBLE control
- PUSH TYPE speaker output Connectors
- 115/230 VOLTAGE selector
- Dimensions L 7.48"W x 2.87"H x 5.39"D



PTA4

Mini 2x120 Watt Stereo Power Amplifier w/ AUX/CD Input

- 2x120W RMS at 4-ohm
- Blue LED Output Level Display
- Power ON LED Indicator
- 3.5mm Aux CD/MP3 Input Jack
- 1/4" Phone Jack
- MIC Volume Control
- Master Volume Control
- Balance Control
- Bass and Treble Tone Controls
- Switchable AUX1/AUX2/CD and RCA Input
- 1/4" MIC Input Jack
- RCA REC Output
- Four Push Type Speaker L/R Terminals
- 110/220 Voltage Selector
- Dimensions: 8.27"W x 2.72"H x 5.39"D



PTAU23

Mini 2x40 Watt Stereo Power Amplifier w/ USB/AUX Inputs

- 2x40W 10% RMS at 4-ohm
- Power ON LED Indicator
- USB Reader Function
- 1/4" Phone Jack
- MIC Volume Control
- Master Volume Control
- Balance Control
- Bass and Treble Tone Control
- Switchable AUX1/AUX2/CD/USB Input
- 1/4" MIC Input Jack
- Switchable MIC Pager and Mixing Modes
- AUX1/AUX2/CD RCA Input
- RCA REC Output
- Four Push Type Speaker L/R Terminals
- 110/220 Voltage Selector
- Dimensions: 7.48"W x 2.72"H x 5.39"D



PTAU34

Mini 2x75 Watt Stereo Power Amplifier w/ USB/AUX Inputs

- 2x75W RMS at 4-ohm
- Blue LED Output Level Display
- Power ON LED Indicator
- USB Reader Function
- 1/4" Phone Jack
- MIC Volume Control
- Master Volume Control
- Balance Control
- Bass and Treble Tone Control
- Switchable AUX1/AUX2/CD/USB Input
- 1/4" MIC Input Jack
- AUX1/AUX2/CD RCA Input
- RCA REC Output
- Four Push Type Speaker L/R Terminals
- 110/220 Voltage Selector
- Dimensions: 7.48"W x 2.72"H x 5.39"D



PTAU45 Mini 2x120 Watt Stereo Power Amplifier w/ USB/CD/AUX Inputs

- 2x120W RMS at 4-ohm
- Blue LED Output Level Display
- Power ON LED Indicator
- USB Reader Function
- 3.5mm Aux CD/MP3 Input Jack
- 1/4" Phone Jack
- MIC Volume Control
- Master Volume Control
- Balance Control
- Bass and Treble Tone Controls
- Switchable AUX1/AUX2/CD/USB Input
- 1/4" MIC Input Jack
- AUX1/AUX2/CD RCA Input
- RCA REC Output
- Four Push Type Speaker L/R Terminals
- 110/220 Voltage Selector
- Dimensions: 8.27" W x 2.72" H x 5.39" D



PVA2 60 Watts Hi-Fi Mini Stereo Amplifier

- Power Output: 2 x 12w (8 Ohm, RMS)
- Power Output: 2 x 24w (4 Ohms RMS)
- Power Output: 60w Max Peak
- 2 Microphone Inputs
- 2 Mic Volume Controls
- Echo Control
- DVD VCD-CD Tape Karaoke Input Selector
- Treble/Bass Controls
- Master Volume Control
- Power Voltage: 110v
- Frequency Range: 20-20khz
- Input Sensitivity/Impedance: 265mv/1khz
- S/N Ratio: 77db
- Input Sensitivity Of Microphone: 8mv
- Thd: 0.3 % (1khz/1w)
- Power Supply: 110v
- Dimensions: 3.3" X 9.8" X 9.1"



PVA3U 60 Watts/ Hi-Fi Mini Amplifier USB/SD Card Player

- USB-SD/MMC-Card Slot Player
- Compatible With MP3/WMA Files With Shuffle Function
- ID3 Tag Display
- USB/Card, CD, Tuner, AUX Audio Input Selector
- Separate Bass And Treble Controls
- Surround Sound Switch
- Output Power: 2 X 15w (Rms) At 8ohm
- Power Output: 2 X 30w (Rms) At 4 Ohms
- Power Output: 60watts Max Peak And 1% Distortion
- Signal-To-Noise Ratio: 76dB Thd: 0.2%
- Sensitivity: 340mv
- Frequency Response: 100-10kHz +/-2
- (Size 4 X 2cm) With Remote Control
- With Shuffle Function
- Power Supply: 110v
- Dimensions: (H)2.5"x(W)7.8"x (D)5.9"



PT260A 200 Watts Digital AM/FM Stereo Receiver

- Power main: 50W x 2 @ 8 ohm 100W x 2 @ 4 ohm
- Stereo Amplifier With A/B Speaker Output
- AM/FM Radio With Digital Display Screen
- Auto Scan, Memory, Radio Station PREVIOUS/NEXT control
- 50 Radio Station Pre-Set Memory
- Volume/Balance/TREBLE/BASS Gain Control For Main Channel
- VOLUME/BASS/TREBLE/ECHO Control For Microphone
- Two Microphone Input JackS
- Three RCA Input Source
- 110/220V power switch
- AM/FM Antenna Included
- Dimension: 17" x 11.5" x 4.7"
- Weight: 14.3 LBS



PT560AU 300 Watts Digital AM/FM Stereo Receiver

- Power main: 150W x 2 @ 8 ohm; 300W x 2 @ 4 ohm
- AM/FM Tuner W/Digital Display Screen
- AUTO SCAN, MEMORY, Radio Stations Pre/Next control
- Play/Pause/PRE/Next/Stop Control for USB Function
- Volume/Bass/Treble/Balance control for Main Channel
- Volume/Bass/Treble/Echo Control for Microphone
- Stereo Amplifier With A/B Speaker Output
- AM/FM Radio With Digital Display Screen
- 50 Radio Station Pre-Set Memory
- USB Reader function
- Control For Main Channel
- Three RCA Input Source
- Control For Microphone
- Two Microphone input Jack
- Remote Control Included
- 110V/220V Power Switch
- Dimension: 19" x 11.4" x 4.7"
- Weight: 11.5 LBS



PTVT790A 19" Rack Mount 2000 Watt AM/FM Multi Source Receiver & Vacuum Tube Amplifier with built in Pre-Amp.

- 2000 Watt Peak Power
- 600 Watts RMS @ 2 Ohms
- 400 Watts RMS @ 4 Ohms
- 240 Watts RMS @ 8 Ohms
- 4 Speaker Line Binding Post(Banana Plug) Outputs
- CD/Tape/AUX RCA Line Inputs
- AM/FM Radio Tuner with Built in Auto Scan
- USB Line Input for portable drives 2 Gig and smaller
- Ipod/MP3 3.5mm Line Audio Input
- Removable Rack Mount Brackets
- Wireless Remote Control
- Dimension: 19"W x 12.5"D x 5.9"H
- Weight: 14.3 LBS





Product Line

PT600A

300W Stereo Receiver / Amplifier

- 6 Inputs Tuner, Tape, CD, Aux, AV1, AV2
- Mic Input with Level Control
- Multifunction Remote Control
- Preset EQ Pop, Rock, Classic, Flat
- Bass Treble Controls
- Front Panel Headphone Jack
- Data Link Ports Interfaces with
- Compatible Components
- Binding Post Speaker Connections
- External EQ Send/Return Loop
- Frequency Response: 20 to 20 KHz
- Rack Mounting Hardware Included
- 110V/220V Switchable
- Dimensions: 16.5"W x 5.5"H x 9"D



PT990A

1000 Watts AM/FM Multi Source Digital Receiver & Vacuum Tube Amplifier w/USB/iPod Inputs

- 300W x 2 Channels RMS
- USB-input with MP3 playback support
- Analog inputs: Phono, Tape, DAB, MD DVD, CD, 2 x AUX
- Digital inputs: 2 x Coaxial, 2 x Optical
- Speakers: 4 outputs
- THD at 1 watt Power out : Inter-modulation distortion:
- Frequency Response: 20Hz-60kHz
- Signal/Noise ratio: 120 dB(Digital In)
- Signal/Noise ratio: 110 dB(Analog In)
- Channel Separation : >80dB
- Audio Analogue input Sensitivity / Impedance: 200mV / 47 Kohm
- A Speaker: 4-8 ohm/B Speaker: 4-8 ohm/A+B Speaker: 8 ohm
- Wide Dynamic Range high Voltage Vacuum Tube Preamplifier Aluminum Panel
- VFD Display
- Bass / Treble +/- 10dB Tone Control
- Analog audio outputs: Tape L/R(REC)out
- Source inputs: DVD / CD/iPod/MD/DAB AUX/Tape/Tuner
- Digital audio inputs: Coaxial in x2 / Optical in x2 / (PCM only)
- Remote control iPod function
- Tuning Range: FM 87.5 MHz-108MHz, AM 522 kHz-1629 kHz/AM 530 kHz-1710 kHz (FM preset 20 station, AM preset 10 station)
- THD: FM-0.7%. AM-1%~1.3%
- Signal/Noise ratio: FM: 68dB, AM: 45dB
- Antenna inputs: FM: 75 ohms unbalance. AM: Loop Antenna
- Power supply voltage: 110V~60Hz
- USB multimedia player for audio
- Dimensions: 17.09"(W) x 12.48"(D) x 5.28"(H)



PT590AU

5.1 Channel Built-In AM/FM Radio/USB/SD Card HDMI Amplifier Receiver

- 5.1 Channel Amplifier
- 4 HDMI Input Port and 1 HDMI Output Port for HDMI Receiver and HDMI Switcher
- One Key Switch Function Between HDMI Receiver and HDMI Switcher
- Built-In AM/FM Radio
- Built-In USB and SD Audio
- 2 MIC Input, Treble and Bass of MIC Adjustable, Independent MIC VOLUME Control
- Over Current Protection, Short Circuit Protection And Over Voltage Protection
- 10 Preset Radio Station
- Full Remote Control
- VFD Display
- Power Output: 60W
- LR Channel (4ohm) 35W for Center, Surround L and Surround R(4Ohm)
- Inout Selector: 4 in 1 out HDMI Selector, 3 Stereo RCA Selector, 1AM/FM Radio, 1 USB/SD 2 Microphone Input
- Output: 5 Channel Speaker Output Terminal for L,R,Cent, SL, SR, And 1 line Out for Subwoofer
- Dimensions: 16.9" x 6" x 12.9"
- Total Power Consumption: 300W



NEW for 2011

PT680A

400 Watts 2 CH AM/FM Multi Source Receiver Amplifier

- Signal-to-noise ratio: 70 dB (IHF-A)
- AM/FM Receiver
- Frequency range: FM87.5MHz-108MHz, AM 520 kHz-1620kHz
- Integrated digital equalizer: Flat, Rock, Pop and Classic
- Fluorescent multifunctional display
- Surround Effect filter
- Source selection buttons: FM, AM, Phono, DVD, CD, Tape
- Power Output: 150 Watts x 2 (RMS) (6ohms)
- Signal/Noise ratio: 70dB
- Auto Preset Search
- Display color: VFD two color
- Source Inputs: Phono, DVD, CD, Tape , Built-in Tuner
- Sound Effect Mode: Flat, Rock, Pop, Classic
- Analogue audio inputs: Audio in x 4 Inputs (Phono, DVD, CD, Tape)
- Sensitivity / Impedance: Phono 2.5mV / 47kohms/DVD, CD, Tape 200mV / 47kohms
- Antenna inputs: FM 75ohm unbalance
- Speaker outputs: 4 speaker output
- Analogue audio outputs Tape Audio L/R RCA Jack out
- Remote control w/2 x AA included
- Power supply voltage: 110V~60Hz
- Dimensions: 16.93" (W) x 10.35" (D) x 5.39"(H)



PT649D

Dual Cassette Deck

- Auto Stop
- Normal and High Speed Dubbing
- Dynamic Noise Reduction
- CrO2 Tape Selector
- 3 Digit Tape Counter
- Recording Level Control
- Dual Color Multifunction Fluorescent Display
- Rec/Play Level Meters
- Auto tape Selector
- RCA Line Inputs and Outputs
- Digital Link Interface for Connecting to PT600A
- Rack Mounting Hardware Included
- 110V/220V Switchable
- Dimensions: 16.53"W x 5.11"H x 8.66"D



PT652T

Digital PLL Quartz Radio Tuner

- AM/FM Quartz Synthesized Tuner
- 20 Station Memory Presets 10 FM / 10 AM
- Auto Station Scanning
- Digital Fluorescent Display
- Mono/Stereo Selector
- Digital Link Interface for Connecting to PT600A
- RCA Preamp Output
- External FM & AM Antennas Included
- Frequency Response: 40 to 14 KHz
- Dimensions: 16.53"W x 3.66"D x 10.03"H
- Rack Mounting Hardware Included
- 110V/220V Switchable



PT659DU

Dual Stereo Cassette Deck w/Tape USB to MP3 Converter

- Normal/High Speed copy function (Direct-dubbing from Cassette in two speeds)
- Dynamic Noise Suppression
- Supports CrO2 tapes
- Auto-stop function
- Quickly transfer music on your tapes to MP3 format on your computer
- CrO2 tape selector
- RCA inputs and outputs
- PC and Mac compatible
- Power supply voltage: 110V~60Hz
- Dimensions:16.54"(W) x 8.46"(D)x 5.32"(H)



PT688CU

Home Theater Audio CD/MP3/WMA Player w/ USB Interface

- Plays MP3/WMA CD's
- Encodes CD titles to MP3 on connected USB media
- Supports CD, CD-R, CD-RW
- Fluorescent multifunctional display
- Skip, Index and Track Search, Repeat function
- Power supply voltage: 110V~60Hz
- Dimension:16.93" (W) x 8.86" (D) x 2.8"(H)



PT504

Rack Mount Am/Fm Digital Tuner W/Auto Start Feature

- 60 (AM+FM) radio station storage
- Tuning/Pre/Next /Auto scan/Store and
- 1-10+ select keys for tuner
- Rack mount brackets
- 110/220V Switchable
- Clock display(am/pm),can start or off at a set time
- Remote control
- Dimensions: 19"w x 9.4"h x 1.6"d
- Weight: 3.5 lbs



PD450A

Professional PA Amplifier w/Built In DVD/CD/MP3/USB/70v Output

- With USB Port, DVD Player (Anti-Shock)
- Compatibility with DVD/CD/CD-R/CD-RW/MP3
- Output Regulation: Less than 2dB no Load to Full Load
- Speaker Output: 4 Ohm(20V) 8 Ohm(28.3V) 16 Ohm(40V) 70V Line Out: 1V±0.3V
- Frequency Response: 20Hz a 20KHz
- Harmonic Distortion: 1%
- S/N Ratio: 2 Mic Input with Volume Control
- 1 AUX Input with Volume Control
- DVD/AUX Volume Control
- 400 Watts
- Indicator: LED Output Level Master
- AC Power Supply: 110-127/220-240 AC 50/60 Hz
- DC Power Supply: 12V or 24V Battery



PD750A

Professional PA Amplifier w/Built In DVD/CD/MP3/USB/70v output

- With USB Port, DVD Player (Anti-Shock)
- Compatibility with DVD/CD/CD-R/CD-RW/MP3
- Output Regulation: Less than 2dB no Load to Full Load
- Speaker Output: 4 Ohm(20V) 8 Ohm(28.3V) 16 Ohm(40V) 70V Line Out: 1V±0.3V
- Frequency Response: 20Hz a 20KHz
- Harmonic Distortion: 1%
- S/N Ratio: ≤75dB
- 2 Mic Input with Volume Control
- 1 AUX Input with Volume Control
- DVD/AUX Volume Control
- 700 Watts
- Tone Controls: ± 10dB at 100Hz
- Treble ±10dB at 10KHz
- Indicator: LED Output Level Master
- AC Power Supply: 110-127/220-240 AC 50/60 Hz
- DC Power Supply: 12V or 24V Battery





Product Line

PD950A

Professional PA Amplifier With Build In DVD/CD/MP3/USB

- Compatibility with DVD/CD/CD-R/CD-RW/MP3
- Output Regulation: Less than 2dB no Load to Full Load
- Speaker Output: 4 Ohm(20V)
8 Ohm(28.3V) 16 Ohm(40V)
- 26V 70V 100V Line Out: 1V±0.3V
- Frequency Response: 50-20000Hz
- Harmonic Distortion: less than 1% at 1Khz, rated Power
- Tone Controls: ± 10dB at 100Hz Treble ±10dB at 10KHz
- Indicator: LED Output Level Master
- Output:1000 WATTS
- Input AUX: 20K Ohms -18±2dB
- Mic 1-3: 600 Ohms -54±3dB (Unbalanced)
- Mic 1-3 Volume Control DVD/AUX
Volume Control Master Control
- AC Power Supply: 110-127/220-240 AC 50/60 Hz
- Indicator LED Output Level Master
- Dimension:17.72" X 13.39" X 3.94"



PD1000A

1000 Watt AM-FM Receiver w/ Built-in DVD/MP3/USB

- Powers 4 Loud Speakers
- Separate Gain Control for DVD/ Tuner/ USB/ MP3
- Multi Media Disc Formats Compatible (DVD/VCD/CD-RW/MP4)
- Digital Colorful Fluorescent Display
- 50 Stations AM/FM Memory Presets, Auto Station Seek/Store
- AUX Input (iPod/MP3 w/ Cable)
- USB Reader Function (For Use w/ Portable USB Drives)
- AM/FM Quartz Synthesized Radio Tuner
- Visual Power Level DB Display
- Subwoofer Line Audio Output
- RGB/RCA/S-Video Outputs
- 1000 Watts Peak Power
- 200 Watts x 2 @ 8 Ohms
- 360 Watts x 2 @ 4 Ohms
- 450 Watts x 2 @ 2 Ohms
- 110/220 Volt Switchable Power Source
- Unit Dimensions: 16.92"W x 5.12"H x 12"D



PD3000A

3000 Watt AM-FM Receiver w/ Built-In DVD/MP3/USB

- Powers 4 Loud Speakers
- Separate Gain Control for DVD/ Tuner/ USB/ MP3
- Multi Media Disc Formats Compatible (DVD/CD/VCD/CD-R/CD-RW/MP4)
- Digital Colorful Fluorescent Display
- 50 Stations AM/FM Memory Presets, Auto Station Seek/Store
- AUX Input (iPod/MP3 w/ Cable)
- USB Reader Function (For Use w/ Portable USB Drives)
- AM/FM Quartz Synthesized Radio Tuner
- Visual Power Level DB Display
- Subwoofer Line Audio Output
- RGB/RCA/S-Video Outputs
- 3000 Watts Peak Power
- 300 Watts x 2 @ 8 Ohms
- 550 Watts x 2 @ 4 Ohms
- 800 Watts x 2 @ 2 Ohms
- 110/220 Volt Switchable Power Source
- Unit Dimensions: 16.92"W x 5.12"H x 12"D



PTCDS1U

Classical Turntable with AM/FM Radio CD/Cassette & USB Recording

- Phono/Radio/CD player/USB record/Cassette
- AM/FM Radio
- Front loading, single CD, drawer type
- CD/MP3/CD-R/CD-RW discs compatible
- USB record
- 3 speed turntable 33-1/3, 45, 78 RPM
- Ceramic stereo cartridge
- Auto return
- Audio output power: 2.5W(max)
- 3.5mm Aux in jack
- Remote control for CD/USB
- 2 speaker
- AC Power
- Dimensions: 20.08"X13.39"X8.86"



PTCDS2UI

Classical Turntable with AM/FM Radio/ CD/ Cassette/ USB Recording & iPod Player

- Phono/Radio/CD player/USB record/Cassette
- AM/FM Radio
- Front loading, single CD, drawer type
- CD/MP3/CD-R/CD-RW discs compatible
- USB record
- 3 speed turntable 33-1/3, 45, 78 RPM
- Ceramic stereo cartridge
- Auto return
- Audio output power: 2.5W(max)
- Ipod player
- Remote control for CD/USB
- 2 speaker
- AC Power
- Dimensions: 20.08"X13.39"X8.86"



Vintage Turntables w/USB Recording & iPod Player

PL5CSUB

Cassette Tape Archiver And Digital Media Converter To PC

- Record cassette tracks or external music to Your computer via USB
- Play back through built-in 25W speaker
- Run the line level outputs to an external amplifier
- Use is as a component cassette deck
- AC 110V 60HZ
- Dimensions:10.2"(W)x5.1"(H)x5.5"(D)
- Weight:3.1Lbs



PLTTB9U

USB Turntable with direct-to-digital USB/SD Card Encoder & Built-in AM/FM Radio conversion

- Turn your Records Into MP3s
- 3 speed (33 1/3, 45 and 78 RPM) turntables
- Built-in adapter for 45 RPM LP included
- ceramic cartridge with diamond needle
- Two built-in full range speakers 4 OHMS,30 Watts
- USB/SD encoder that can easily record old Vinyl or other Aux in audio onto flash drive or SD/MMC card through USB/SD sockets in
- MP3 formats
- Play your music (mp3 and wma)pre-stored on SD/MMC card ,USB drive or M3 player through USB/SD host.
- AM/FM stereo radio
- Strong strengthened semi-transparent dust cover
- AC 110V 60HZ
- Dimensions: 15.5" x 11" x 4.7"



PSPVC4

4 Channel High Power Stereo Speaker Selector W/volume Control

- Up to 4 Separate Speaker Pairs to your Stereo System
- Accepts Speaker Wires Up to 14- Gauge
- Handles 100Watts Per Channel with Speaker Systems that have a Minimum Impedance of 8 Ohms
- Protection Circuitry Keeps it Running Smoothly
- Individual Speaker Volume Control
- Support Two Stereo Amplifiers
- Frequency Response: 20Hz-20KHz
- Dimensions: 16.92"(W) x 3.03"(H) x 6.29"(D)



PSPVC6

6 Channel High Power Stereo Speaker Selector W/Volume Control

- Up to 6 Separate Speaker Pairs to your Stereo System
- Accepts Speaker Wires Up to 14- Gauge
- Handles 100Watts Per Channel with Speaker Systems that have a Minimum Impedance of 8 Ohms
- Protection Circuitry Keeps it Running Smoothly
- Individual Speaker Volume Control
- Support Two Stereo Amplifiers
- Frequency Response: 20Hz-20KHz
- Dimensions: 16.92"(W) x 3.03"(H) x 6.29"(D)



PSS4

4 Channel High Power Stereo Speaker Selector

- Up to 4 Separate Speaker Pairs to Your Stereo System
- Accepts Speaker Wires up to 14-Gauge
- Handles 100Watts per Channel w/ Speaker Systems
- That Have Minimu Impedance of 8 Ohms
- Protection Circuitry Keeps It Running Smoothly
- Frequency Response: 20Hz-20KHz
- Dimensions: 7.48"(W) x 1.97"(H) x 4.72"(D)





Product Line

PSS6

6 Channel High Power Stereo Speaker Selector

- Up to 6 Separate Speaker Pairs to Your Stereo System
- Accepts Speaker Wires up to 14-Gauge
- Handles 100Watts per Channel w/ Speaker Systems
- That Have Minimun Impedance of 8 Ohms
- Protection Circuitry Keeps It Running Smoothly
- Frequency Response: 20Hz-20KHz
- Dimensions: 9.05"(W) x 1.85"(H) x 5.90"(D)



PSS8

8 Channel High Power Stereo Speaker Selector

- Up To 8 Separate Speakers Pair To Your Stereo System.
- Accepts Speaker Wires Up To 14-Gauge.
- Handles 100 Watts Per Channel With Speaker
- Systems That Have A Minimum Impedance Of 8 Ohms
- Protection Circuitry Keeps It Running Smoothly
- Frequency Response: 20Hz-20KHz
- Dimensions 12.8" X 2.04" X 6.12"



PVC1

Wall Mount Rotary Volume Control knob

- Control room volume with ease
- 10-position, light-touch knob
- Perfect companion for the HiFi Four-pair Speaker Selector
- Attractive standard and Decora-style wall plates
- Includes mounting ring and wire nuts for installation
- 100W Load Handling



PVC2

Wall Mount Vertical Slide Volume Control Knob

- Control room volume with ease
- Soft-touch, 12-step slide attenuation offers Smooth, simple operation
- Removable terminal blocks accept up to 14-gauge wire
- Switchable impedance matching lets you connect Up to 16 pairs of 8-ohm speakers to 1 amplifier
- Includes mounting ring and wire nuts for installation
- 100W Load Handling



PVC3

High Power Volume Control With Built In Relay Circuit

- 5-Position, Light-Touch Knob
- Perfect Companion For Hi-fi
- Four-Pair Speakers
- 2/3 and 4 wire mode
- Build in relay circuit for (emergency Message from same amplifier)
- Attractive Standard And Decora- Style Wall Plates
- Includes Mounting Ring And Wire Nuts for Installation
- 100 Watts Load Handling
- Dimensions: 4.7" X 2.8" X 1.9"



PCSB5

5 1/4" Pre-Construction Speaker Brackets

PCSB6

6" Pre-Construction Speaker Brackets

PCSB8

8" Pre-Construction Speaker Brackets

- 5 1/4 inch In-Ceiling Speaker bracket
- For Uses in a New Construction Projects
- Serves as Place Holder
- Metal Wings Easy to Mount at Any Framing Situation
- With Virtually No Rise In Drywall Depth



PDIC51RD

5.25" Two-Way In-Ceiling Speaker System


- In-Ceiling 2-Way Speaker System
- 5-1/4" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1" Polymer Dome Tweeter
- 150 Watts Rated Peak Power
- Frequency Response: 80Hz-20K Hz
- 4-8 Ohm Impedance
- Cut-out Dimension: 6 1/2" Diameter x 2 5/8" Depth
- Overall Dimensions: 8" Diameter x 2 5/8" Depth
- Sold as a Pair



PDIC60

250 Watt 6.5" Two-Way In-Ceiling Speaker System


- 6.5" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1" Titanium Dome Tweeter
- 250 Watts Rated Peak Power
- Frequency Response: 65Hz-22kHz
- 4-8 Ohm Impedance
- Cut-Out Dimensions: 7 7/8" Diameter x 2 3/4" Depth
- Overall Dimensions: 9" Diameter x 2 3/4" Depth
- Sold as a Pair



PDIC60T

6.5" Two-Way In-Ceiling Speakers w/70V Transformer

- 70V Transformer, Tapping at: 8 ohm,30W,20W,15W,10W,5W
- 8 Ohm Impedance
- 6.5" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1" Titanium Dome Tweeter
- 250 Watts Rated Peak Power
- Frequency Response: 65Hz-22kHz
- Cut-Out Dimensions: 7 7/8" Diameter x 4 5/8" Depth
- Overall Dimensions: 9" Diameter x 4 5/8" Depth
- Sold as a Pair

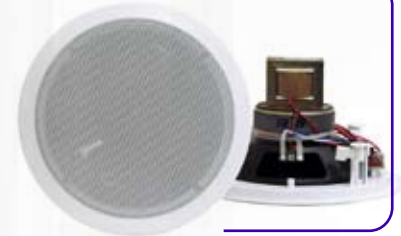

PDIC61RD

6.5" Two-Way In-Ceiling Speaker System

- In-Ceiling 2-Way Speaker System
- 6-1/2" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1/2" Polymer Dome Tweeter
- 200 Watts Rated Peak Power
- Frequency Response: 70Hz-20K Hz
- 4-8 Ohm Impedance
- Cut-out Dimensions: 7 7/8" Diameter x 2 3/4" Depth
- Overall Dimensions: 9" Diameter x 2 3/4" Depth
- Sold as a Pair



PDIC65SQ

6.5" Two-Way In-Ceiling Speaker System

- In-Ceiling 2-Way Speaker System
- 6-1/2" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1/2" Polymer Dome Tweeter
- 200 Watts Rated Peak Power
- Frequency Response: 70Hz-20K Hz
- 4-8 Ohm Impedance
- Cut-out Dimension: 7 1/4" x 7 1/4" x 3" Depth
- Overall Dimensions: 8 1/2" x 8 1/2" x 3" Depth
- Sold as a Pair



PDIC80

300 Watt 8" Two-Way In-Ceiling Speaker System

- 8" Midbass Speaker
- 1.5" High Temperature Voice Coil
- Directable 1" Titanium Dome Tweeter
- 4-8 Ohm Impedance
- 300 Watts Rated Peak Power
- Frequency Response: 55Hz-22kHz
- Cut-Out Dimensions: 9 3/8" Diameter x 3 1/2" Depth
- Overall Dimensions: 10 3/4" Diameter x 3 1/2" Depth
- Sold as a Pair






Product Line

PDIC80T

8" Two-Way In-Ceiling Speakers w/70V Transformer

- 70 Volt Transformer, Tapping at: 8 ohm,50W,40W,30W,20W,10W
- 8 Ohm Impedance
- 8" Midbass Speaker
- 1.5" High Temperature Voice Coil
- Directable 1" Titanium Dome Tweeter
- 300 Watts Rated Peak Power
- Frequency Response: 55Hz-22kHz
- Cut-Out Dimensions: 9 3/8" Diameter x 5 3/4" Depth
- Overall Dimensions: 10 3/4" Diameter x 5 3/4" Depth
- Sold as a Pair

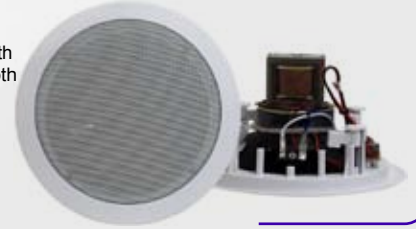

PDIC81RD

8" Two-Way In-Ceiling Speaker System

- In-Ceiling 2-Way Speaker System
- 8" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1/2" Polymer Dome Tweeter
- 250 Watts Rated Peak Power
- Frequency Response: 50Hz-20K Hz
- 4-8 Ohm Impedance
- Cut-out Dimensions: 9 3/8" Diameter x 3 1/2" Depth
- Overall Dimensions: 10 1/2" Diameter x 3 1/2" Depth
- Sold as a Pair



PDIC554

5" Full Range In Ceiling Speaker System W/Transformer

- 5" Speaker Woofer System
- 0.76" High Temperature Voice Coil
- 1.0" Tweeter Cup
- 100 Watts Peak Power
- Frequency Response: 90-16 KHz
- SPL: 89 dB
- 8 Ohm Impedance
- 100V Transformer
- 8 Ohm/ 5W
- Overall Dimensions: 8.2"(W) x 8.2"(H) x 2.1"(D)



PDIC56

6.5" Full Range In-Ceiling Flush Mount Enclosure Speaker System

- 6.5" Speaker
- 1" High Temperature Voice Coil
- 1.5" Tweeter Cup
- 120 Watts Peak power
- Frequency Response: 60-16kHz
- 8 Ohm Impedance
- SPL: 89dB
- Cut-Out Dimensions: 6 3/4" Diameter x 3 1/2" Depth
- Overall Dimensions: 9" Diameter x 3 1/2" Depth



PDIC564

6-1/2" Full Range In-Ceiling Speaker System W/Transformer

- 6-1/2" Speaker Woofer System
- 0.76" High Temperature Voice Coil
- 1.2" Tweeter Cup
- 150 Watts Peak Power
- Frequency Response: 70-16 KHz
- SPL: 89 dB
- 8 Ohm Impedance
- 100V Transformer
- 8 Ohm/ 5W
- Overall Dimensions: 10"(W) x 10"(H) x 2.8"(D)



PDIC58

8" Full Range In-Ceiling Speaker System W/Transformer

- 8" Speaker
- 1" High Temperature Voice Coil
- 1.5" Tweeter Cup
- 200 Watts Peak power
- Frequency Response: 60-16kHz
- 8 Ohm Impedance
- 100V Transformer Tapping At 10W
- SPL: 89dB
- Cut-Out Dimensions: 8" Diameter x 3.15" Depth
- Overall Dimensions: 12.8" Diameter x 3.15" Depth
- Sold as a Pair



PDIC582

8" Full Range Speaker Flush Mount Enclosure System

- 8" Speaker Woofer System
- 1.0" High Temperature Voice Coil
- 1.5" Tweeter Cup
- 150 Watts Peak Power
- Frequency Response: 60-16 KHz
- SPL: 89 dB
- 8 Ohm Impedance
- Overall Dimensions: 10.6"(W) x 10.6"(H) x 4.4"(D)



PDPC52

5 1/4" In-Ceiling 2-Way Flush Mount Enclosure Speaker System

- 5-1/4" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1" Polymer Dome Tweeter
- 150 Watts Rated Peak Power
- Frequency Response: 80Hz-20KHz
- 4-8 Ohm Impedance
- Cut-Out Dimensions: 7 2/25" (Diameter) x 4 4/5" (Depth)
- Sold as a Pair



PDPC5T

5" In Ceiling Flush Mount Enclosure Speaker System w/Rotary Tapping 70V Transformer

- 5" Long Throw Woofer
- 1" High Temperature Voice Coil
- 1" Mylar Dome Tweeter
- 200 Watts Rated Peak Power
- Frequency Response: 70 Hz - 20KHz
- 8 Ohm Impedance
- 70V transformer with Rotary Tapping at:
 - 8 Ohm, 0.25W, 0.5W, 1W, 2.5W, 5W, 7.5W, 15W, 30W
- Vented Design for High Power and Deep Bass Response
- Cut-out Dimensions: 8 7/25" (Diameter) x 5 18/25" (Depth)
- Sold as Single



PDPC62

6 1/2" In-Ceiling 2-Way Flush Mount Enclosure Speaker System

- 6-1/2" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1" Polymer Dome Tweeter
- 200 Watts Rated Peak Power
- Frequency Response: 70Hz-20KHz
- 4-8 Ohm Impedance
- Cut-Out Dimensions: 8 7/25" (Diameter) x 5 18/25" (Depth)
- Sold as Pair



PDPC6T

In-Ceiling Enclosed Speaker System w/Rotary Tapping 70V Transformer

- 6.5" Long Throw Woofer
- 1" High Temperature Voice Coil
- 1" Mylar Dome Tweeter
- 250 Watts Rated Peak Power
- Frequency Response: 60 Hz - 20K Hz
- 8 Ohm Impedance
- 70V transformer with Rotary Tapping at:
 - 8 Ohm, 0.25W, 0.5W, 1W, 2.5W, 5W, 7.5W, 15W, 30W
- Vented Design for High Power and Deep Bass Response
- Cut-out Dimensions: 9 12/25" (Diameter) x 5 18/25" (Depth)
- Sold as Single



PDPC82

8" In-Ceiling 2-Way Flush Mount Enclosure Speaker System

- 8" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1" Polymer Dome Tweeter
- 250 Watts Rated Peak Power
- Frequency Response: 50Hz-20KHz
- 4-8 Ohm Impedance
- Cut-Out Dimensions: 9 17/25" (Diameter) x 5 18/25" (Depth)
- Sold as Pair



PDPC8T

In-Ceiling Enclosed Speaker System w/Rotary Tapping 70V Transformer

- 8" Long Throw Woofer
- 1" High Temperature Voice Coil
- 1" Mylar Dome Tweeter
- 300Watts Rated Peak Power
- Frequency Response: 50 Hz - 20K Hz
- 8 Ohm Impedance
- 70V transformer with Rotary Tapping at:
 - 8 Ohm, 0.25W, 0.5W, 1W, 2.5W, 5W, 7.5W, 15W, 30W
- Vented Design for High Power and Deep Bass Response
- Cut-out Dimensions: 11 2/5" (Diameter) x 5 18/25" (Depth)
- Sold as Single





Product Line

PHSKITS

200 Watts 5 1/4" Dual In-Ceiling Speaker /Volume Contro/Speaker Wall Plate/Wiring Combo Speaker System

- One Pair of 5-1/4" In-Ceiling
- Co-axial Speakers w/ Mylar Tweeter
- 50 Feet of Speacially Rated
- 16 Gauge/ 4 Conductor Speaker Cable
- 200 Watts Peak Power
- Stereo In-Wall Mounted Rotary Volume Control
- Enables the User to Control the Volume of the Room They are Located
- Provides Clean Wall Jack
- Connections for One Pair of Speakers to Your Audio System



PHSKIT6

250 Watts 6-1/2" Dual In-Ceiling Speaker /Volume Contro/Speaker Wall Plate/Wiring Combo Speaker System

- One Pair of 6-1/2" In-Ceiling
- Co-axial Speakers w/ Mylar Tweeter
- 50 Feet of Speacially Rated
- 16 Gauge/ 4 Conductor Speaker Cable
- 250 Watts Peak Power
- Stereo In-Wall Mounted Rotary Volume Control
- Enables the User to Control the Volume of the Room They are Located
- Provides Clean Wall Jack
- Connections for One Pair of Speakers to Your Audio System



PHSKIT8

300 Watts 8" Dual In-Ceiling Speaker /Volume Contro/Speaker Wall Plate/Wiring Combo Speaker System

- One Pair of 8" In-Ceiling
- Co-axial Speakers w/ Mylar Tweeter
- 50 Feet of Speacially Rated
- 16 Gauge/ 4 Conductor Speaker Cable
- 300 Watts Peak Power
- Stereo In-Wall Mounted Rotary Volume Control
- Enables the User to Control the Volume of the Room They are Located
- Provides Clean Wall Jack
- Connections for One Pair of Speakers to Your Audio System



PIC62A

250 Watt 6.5" High Performance Directional Two-Way In-ceiling Speaker System w/Adjustable Treble Control

- Directional Design - Focused Sound
- 5" Polypropylene Cone Full Range Mid-bass Speaker
- Pivoting 1" Voice Coil Silk Dome Tweeter
- Adjustable Treble Control
- 250 Watts Rated Peak Power/ 125 Watts RMS
- Frequency Response: 45Hz-20KHz
- Sensitivity: 88Db
- 4-8 Ohm Impedance
- Cut-out Dimensions: 4.72" x 11.02" x 11.02"
- Net Weight: 1.3Kg
- Including Built-in Mounting Hardware for Easy Installation



PIC6E

250 Watt 6.5" Two-Way In-ceiling Speaker System w/Adjustable Treble Control

- 6.5" Polypropylene Cone Full Range Mid-bass Speaker
- Pivoting 1" Voice Coil Silk Dome Tweeter
- Adjustable Treble Control
- 250 Watts Rated Peak Power/ 125 Watts RMS
- Frequency Response: 45Hz-20KHz
- Sensitivity: 88Db
- 4-8 Ohm Impedance
- Dimensions: 3.93" x 9.05"
- Net Weight: 1.3Kg
- Includes Built-in Mounting Hardware for Easy Installation



PIC8E

300 Watt High-End 8" Two-Way In-ceiling Speaker System w/Adjustable Treble Control

- 8" Polypropylene Cone Full Range Mid-bass Speaker
- Pivoting 1" Voice Coil Silk Dome Tweeter
- Adjustable Treble Control
- 300 Watts Rated Peak Power/ 150 Watts RMS
- Frequency Response: 35Hz-20KHz
- Sensitivity: 88Db
- 4-8 Ohm Impedance
- Cut-out Dimensions: 4.13" x 11.02"
- Net Weight: 1.5Kg
- Includes Built-in Mounting Hardware for Easy Installation



PWRC51

5.25" 2-Way In ceiling Stereo Speaker Weather Proof

- 5 1/4" Polypropylene Woofer With Santoporene Surround
- 200 Watts Power Handling
- 1/2" Polycarbonate Tweeter
- Frequency Response: 65 Hz-22KHz
- 4 Ohm Impedence
- Weather-Resistant Speaker for High Moisture Situation
- Outside Diameter: 8"
- Cut Out Diameter: 6 1/2"
- Mounting Depth: 2 5/6"
- Including Hardware for Easy Installation



PWRC52

5.25" In-Ceiling (Dual Channel/ Voice Coil) Weather Proof Single Speaker

- 5.25" In-Ceiling Dual Channel/ Voice Coil Weather Proof Speaker
- 200 Watts Power Handling
- Dual 1/ 2" Polycarbonate Tweeter
- Frequency Response: 65Hz-22KHz
- Dual 8 Ohm Impedence
- Weather Resistant Speakers for High Moisture Situation
- Outside Diameter: 8"
- Cut Out Diameter: 6 1/2"
- Mounting Depth: 2 5/6"
- Including Hardware for Easy Installation



PWRC61

6.5" 2-Way In ceiling Stereo Speaker Weather Proof

- 6.5" Polypropylene Woofer With Santoporene Surround
- 300 Watts Power Handling
- 1/2" Polycarbonate Tweeter
- Frequency Response: 60Hz-22KHz
- 4 Ohm Impedence
- Weather-Resistant Speaker for High Moisture Situation
- Outside Diameter: 9"
- Cut Out Diameter: 7 2/3"
- Mounting Depth: 2 6/7"
- Including Hardware for Easy Installation



PWRC62

6.5" In-Ceiling (Dual Channel/ Voice Coil) Weather Proof Speaker

- 6.5" In-Ceiling Dual Channel/ Voice Coil Weather Proof Speaker
- 300 Watts Power Handling
- Dual 1/ 2" Polycarbonate Tweeter
- Frequency Response: 60Hz-22KHz
- Dual 8 Ohm Impedence
- Weather Resistant Speakers for High Moisture Situation
- Outside Diameter: 9"
- Cut Out Diameter: 7 2/3"
- Mounting Depth: 2 6/7"
- Including Hardware for Easy Installation



PWRC81

8" Two Way In Ceiling Stereo Speaker Water Proof

- 8" Polypropylene Woofer With Santoporene Surround
- 400 Watts Power handling
- 1/2" Polycarbonate Tweeter
- Frequency Response: 55 Hz - 22K Hz
- 4 Ohm Impedence
- Weather-Resistant Speakers for High Moisture Situation
- Outside Diameter: 10 3/4"
- Cut Out Diameter: 9 1/3"
- Mounting Depth: 3 2/3"
- Including Hardware For Easy Installation



PWRC82

8" In-Ceiling (Dual Channel/ Voice Coil) Weather Proof Speaker

- 8" In-Ceiling Dual Channel/ Voice Coil Weather Proof Speaker
- 400 Watts Power Handling
- Dual 1/ 2" Polycarbonate Tweeter
- Frequency Response: 55Hz-22KHz
- Dual 8 Ohm Impedence
- Weather Resistant Speakers for High Moisture Situation
- Outside Diameter: 10 3/4"
- Cut Out Diameter: 9 1/3"
- Mounting Depth: 3 2/3"
- Including Hardware for Easy Installation





Product Line

PDIW52

5.25" Two-Way In-Wall Speaker System / Directional Tweeter

- In-Wall 2-Way Speaker System
- 5.25" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1" Titanium Dome Tweeter
- 200 Watts Rated Peak Power
- Frequency Response: 70Hz-22kHz
- 4-8 Ohm Impedance
- Cut-Out Dimensions: 6 5/8"W x 10 1/8"H x 2 3/4"D
- Overall Dimensions: 7 5/8"W x 11 1/4"H x 2 3/4"D
- Sold as a Pair



PDIW55

5.25" Two-Way In-Wall Speaker System

- In-Wall 2-Way Speaker System
- 5-1/4" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1/2" Polymer Dome Tweeter
- 150 Watts Rated Peak Power
- Frequency Response: 80Hz-20K Hz
- 4-8 Ohm Impedance
- Cut-out Dimensions: 6 5/8"W x 10 1/8"H x 2 3/4"D
- Overall Dimensions: 7 5/8"W x 11 1/4"H x 2 3/4"D
- Sold as a Pair



PDIW62

6.5" Two-Way In-Wall Speaker System / Directional Tweeter

- In-Wall 2-Way Speaker System
- 6.5" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1" Titanium Dome Tweeter
- 250 Watts Rated Peak Power
- Frequency Response: 65Hz-22kHz
- 4-8 Ohm Impedance
- Cut-Out Dimensions: 7 3/4"W x 11 3/8"H x 2 7/8"D
- Overall Dimensions: 8 1/2"W x 12 1/4"H x 2 7/8"D
- Sold as a Pair



PDIW65

6.5" Two-Way In-Wall Speaker System

- In-Wall 2-Way Speaker System
- 6-1/2" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1/2 Inch Polymer Tweeter
- 200 Watts Rated Peak Power
- Frequency Response: 70Hz-20K Hz
- 4-8 Ohm Impedance
- Cut-out Dimensions: 7 3/4"W x 11 3/8"H x 2 7/8"D
- Overall Dimensions: 8 3/4"W x 12 1/2"H x 2 7/8"D
- Sold as a Pair



PDIW57

5" Two Way In Wall Enclosed Speaker System w/ Directional Tweeter

- 5.25" long Throw Woofer
- 1" High Temperature Voice Coil
- 1" Titanium Dome Tweeter
- 300 Watts Rated Peak Power
- Frequency Response: 70Hz - 22 KHz
- 4-8 Ohm Impedance
- Vented Design for High Power and Deep Bass Response
- Cut-Out Dimensions: 7.04"(W) x 10.6"(H) x 3.68"(D)
- Sold as One Pair



PDIW67

6.5" Two Way In Wall Enclosed Speaker System w/ Directional Tweeter

- 6.5" long Throw Woofer
- 1" High Temperature Voice Coil
- 1" Titanium Dome Tweeter
- 360 Watts Rated Peak Power
- Frequency Response: 65Hz - 22 KHz
- 4-8 Ohm Impedance
- Vented Design for High Power and Deep Bass Response
- Cut-Out Dimensions: 8.24"(W) x 11.76"(H) x 3.68"(D)
- Sold as One Pair



PDIW87

8" Two Way In Wall Enclosed Speaker System w/ Directional Tweeter

- 8" long Throw Woofer
- 1" High Temperature Voice Coil
- 1" Titanium Dome Tweeter
- 400 Watts Rated Peak Power
- Frequency Response: 50Hz – 20 KHz
- 4-8 Ohm Impedance
- Vented Design for High Power and Deep Bass Response
- Cut-Out Dimensions: 8.84"(W) x 13"(H) x 4"(D)
- Sold as One Pair



PDIWCS56

Dual 5.25" 2 Way-IN-Wall Center Channel Speaker System

- Dual 5.25" Long Throw Woofer
- Video Shielded
- Center/ Left/ Right Channel
- 300 Watts Rated Peak Power
- 1" High Temperature Voice Coil
- 1" Titanium Dome Tweeter
- Electronic Crossover Network
- Variable Boost (+7-3dB)
- Frequency Response 70Hz-22Khz
- 8 Ohm Impedance
- Vented Design for High Power and Deep Base Response
- Overall: 7 2/5"(H) x 15 1/5"(W) x 3 3/5"(D)
- Cut Out: 6 2/5"(H) x 13 4/5"(W) x 3"(D)
- Including Hardware for Easy Wall Mount Installation



PDIWCS62

Dual 6.5" 2-Way In-Wall Center Channel Speaker System


- Dual 6 1/2" Long Throw Woofer
- Video Shielded
- Center/ Left/ Right Channel
- 360 Watts Rated Peak Power
- 1" High Temperature Voice Coil
- 1" Titanium Dome Tweeter
- Electronic Crossover Network
- with Variable Boost (+7-3dB)
- Frequency Response 50Hz-22Khz
- 8 Ohm Impedance
- Vented Design for High Power and Deep Base Response
- Overall: 17.6"(W) x 8.08"(H) x 3.92"(D)
- Cut Out: 16.4"(W) x 7.04"(H) x 3.4"(D)
- Including Hardware for Easy Wall Mount Installation



PDIWS8

8" In-Wall / In-Ceiling High Power Subwoofer

- 8" In-Wall High Power Subwoofer
- 2.0" High Temperature Dual Voice Coil
- Power Handling: 150W RMS, 300W Peak
- Frequency Response: 60Hz- 4 KHz
- 4-8 Ohm Impedance
- Cut-Out Dimensions: 7 7/8" W x 7 7/8" H x 3 1/2" D

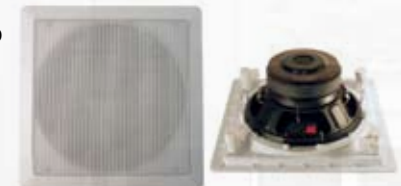

PDIWS10

10" In-Wall High Power Subwoofer

- 10" In-Wall High Power Subwoofer
- 2.0" High Temperature Dual Voice Coil
- Power Handling: 180W RMS, 360W Peak
- Frequency Response: 40Hz - 3K Hz
- 8 Ohm Impedance
- Overall: 12.2"(W) x 12.2"(H) x 4.2"(D)
- Cut out: 10.8"(W) x 10.8"(H) x 3.8"(D)



PDIWS12

12" In-Wall High Power Subwoofer

- 12" In-Wall High Power Subwoofer
- 2" High Temperature Dual Voice Coil
- Power Handling: 200W RMS, 400W Peak
- Frequency Response: 30Hz - 3K Hz
- 8 Ohm Impedance
- Overall: 14.6"(W) x 14.6"(H) x 4.2"(D)
- Cut out: 13.2"(W) x 13.2"(H) x 3.8"(D)





Product Line

PDIW528

Dual 8" In-Wall High Power in wall Subwoofer System

- 2x8" In-Wall High Power Subwoofer
- 2.0" High Temperature Dual Voice Coil
- Power Handling: 300W RMS, 600W Peak
- Frequency Response: 60Hz-4KHz
- 8 Ohm Impedance
- Overall: 20" (W) x 10.2" (H) x 4.6" (D)
- Cut Out: 18.6" (W) x 8.8" (H) x 4.0" (D)



PBS50B

100 Watts Ceiling Hanging Mount 5" Ball Pendant Speaker Without 70V Transformer (Black Color)

PBS50W

100 Watts Ceiling Hanging Mount 5" Ball Pendant Speaker(White Color)

- 5" Speaker Indoor Ceiling Hanging Mount
- Power/Load Rating: 100Watts
- Nominal Impedance: 8 Ohms
- Frequency Range: 180 Hz - 15 KHz
- SPL(@ 1W/1m): 90db
- Mounting Bracket & Hardware Included
- Dimensions: 7" H X 7" W



PBS5TB

Ceiling Hanging Mount 5" 70 Volt 75 Watts Ball Pendant Speaker with 70V, Transformer (Black Color)

PBS5TW

Ceiling Hanging Mount 5" 75 Watts Ball Pendant Speaker With 70V Transformer (White)

- 5" Speaker Indoor Ceiling Hanging Mount
- Power/Load Rating: 75Watts
- Nominal Impedance: 8 Ohms
- 70 Volt Transformer Tapping @ 10 / 5 / 2.5
- Frequency Range: 180 Hz - 15 KHz
- SPL(@ 1W/1m): 90db
- Mounting Bracket & Hardware Included
- Dimensions: 7" H X 7" W



PBS80B

100 Watt 6.5" Ceiling Hanging Mount Ball Pendant Speaker (Black)

PBS80W

100 Watt 6.5" Ceiling Hanging Mount Ball Pendant Speaker (White)

- 6.5" Speaker Indoor Ceiling Hanging Mount
- Power/Load Rating: 100 watts
- Nominal Impedance: 8 Ohms
- Frequency Range: 150 Hz - 15 KHz
- SPL(@ 1w/1m): 92db
- Mounting Bracket & Hardware Included
- Dimensions: 10.5"H X 10.5"W



PCB3BK

3" 100 Watt Black Mini Cube Bookshelf Speaker In Black

PCB3WT

3" 100 Watt White Mini Cube Bookshelf Speaker In White

- Full Range Mini Speaker System
- Great for Home Theater Applications
- Video Shield
- 3" Paper Cone Driver
- Power Handling: 100 Watts Peak
- Frequency Response: 90 Hz- 18 KHz
- 8 Ohms Impedance
- Dimensions: 3.6" (H) x 3.6" x (W) x 4.6" (D)



PCB4BK

4" 200 Watt Black Mini Cube Bookshelf Speaker In Black

PCB4WT

4" 200 Watt White Mini Cube Bookshelf Speaker In White

- Full Range Mini Speaker System
- Great for Home Theater Applications
- Video Shielded
- 4" Paper Cone Driver
- Power Handling: 200 Watts Peak
- Frequency Response: 80Hz - 18 KHz
- 8 Ohm Impedance
- Dimensions: 4.8"(H) x 4.8"(W) x 5.2"(D)



PDMN38

3.5" Two-Way Bass Reflex Mini-Monitor & Bookshelf/wall-mount Speakers

- Excellent for Monitor or Surround Sound Applications
- 3.5" Long Throw Woofer
- 1" High Compliance Mylar Tweeter
- 150 Watts RMS/300 Watts Peak
- Frequency Response: 60Hz-20kHz
- 8 Ohm Impedance
- Vented Design for High Power & Deep Bass Response
- Heavy Duty ABS Construction Cabinet w/Rubber Edges
- Quick Release Speaker Connections
- Spring Loaded U Mounting System
- 4.75"W x 7.25"H x 4.75"D



PDMN48

5" Two-Way Bass Reflex Mini-Monitor & Bookshelf/wall mount Speakers

- Excellent for Monitor or Surround Sound Applications
- 5" Long Throw Woofer
- 1" High Compliance Mylar Tweeter
- 200 Watts RMS/400 Watts Peak
- Frequency Response: 40Hz-22kHz
- 8 Ohm Impedance
- Vented Design for High Power & Deep Bass Response
- Heavy Duty ABS Construction Cabinet w/Rubber Edges
- Quick Release Speaker Connections
- Spring Loaded U Mounting System
- 6.25"W x 9.25"H x 5.75"D



PDMN58

6.5" Two-Way Bass Reflex Mini-Monitor System & Bookshelf/wall mount Speakers

- Excellent for Monitor or Surround Sound Applications
- 6.5" Long Throw Woofer
- 1" High Compliance Mylar Tweeter
- 300 Watts RMS/500 Watts Peak
- Frequency Response: 30Hz-22kHz
- 8 Ohm Impedance
- Vented Design for High Power & Deep Bass Response
- Heavy Duty ABS Construction Cabinet w/Rubber Edges
- Quick Release Speaker Connections
- Spring Loaded U Mounting System
- 7"W x 10 7/8"H x 6 1/3"D



PDMN68

8" Two-Way Ceiling Mount/Wall Mount/Book Shelf Speakers

- 400 Watts Peak
- 8 Ohm Impedance
- 8" Long Throw Woofer
- 1" High Compliance Tweeter
- Vented Design for High Power Deep Bass Response
- Heavy Duty ABS Construction
- Cabinet w/Rubber Edges
- Quick Release Speaker Connections
- Ceiling Mounting Plates (for use with Universal Mounting Brackets)
- Frequency Response: 32Hz-22kHz
- 15 3/8"W x 9 7/8"H x 8 1/2"D





Product Line

PDWTS

5.25" Indoor Surface Mount PA Wall Speaker w/ 70V Transformer

- 5.25" indoor surface Mount wall speaker
- Power/Load Rating: 35Watts
- Nominal Impedance: 8 Ohms
- 70 Volt Transformer Tapping @ 6 / 3 / 1.5
- Frequency Range: 150 Hz - 17 KHz
- SPL(@ 1W/1m): 90dB
- Mounting Bracket & Hardware Included
- Dimensions: 11" H x 7.5" W x 3.5" D



PDWT6

6.5" Indoor Surface Mount PA Wall Speaker w/ 70V Transformer

- 6.5" indoor surface Mount wall speaker
- Power/Load Rating: 50Watts
- Nominal Impedance: 8 Ohms
- 70 Volt Transformer Tapping @ 10 / 5 / 2.5
- Frequency Range: 130 Hz - 15 KHz
- SPL(@ 1W/1m): 92dB
- Mounting Bracket & Hardware Included
- Dimensions: 13" H x 9.5" W x 4" D



PRJS56B

5" 20 Watt Ceiling Hanging Pendant Speaker w/ 70V Transformer (Black)

PRJS56W

5" 20 Watt Ceiling Hanging Pendant Speaker w/ 70V Transformer (White)

- 5" 20 Watts Speaker indoor Ceiling Hanging Mount
- Power/Load Rating: 20Watts
- Nominal Impedance: 8 Ohms
- 70 Volt Transformer Tapping @ 10 / 5 / 2.5
- Frequency Range: 130 Hz - 17 KHz
- SPL(@ 1W/1m): 90dB
- Mounting Bracket & Hardware Included
- Simply hang speaker with Included chain
- Dimensions: 5.5" H x 5.5" W x 8" D



PRJS66B

6.5" 40 Watt Ceiling Hanging Pendant Speaker w/ 70V Transformer (Black)

PRJS66W

6.5" 40 Watt Ceiling Hanging Pendant Speaker w/ 70V Transformer (White)

- 6.5" Speaker Indoor Ceiling Hanging Mount
- Power/Load Rating: 40 Watts
- Nominal Impedance: 8 Ohms
- 70 Volt Transformer Tapping @ 20 / 10 / 5
- Frequency Range: 100 Hz - 17 KHz
- SPL (@ 1w/1m): 92db
- Mounting Bracket & Hardware Included
- Simply Hang Speaker with Included Chain
- Dimensions: 7" H X 7" W X 9.5" D



PDSUB8A

8" 300 Watt Front-Firing Book Shelf Powered Subwoofer Speaker

- Gain Control for Volume Adjustment
- Adjustable Low Pass 50Hz to 150 Hz
- Phase Switch 0-180°
- High Level (Speaker Level) Binding Post Inputs
- Low Level RCA Inputs and Outputs
- 8" Coated Paper Cone w/ Rubber Edge
- Discrete A/ B Class Amplifier
- 150 Watts RMS/ 300 Watts Peak
- Frequency Response: 40Hz-350 Hz
- Dimensions: 12.8" (H) x 12.4" (W) x 15.2" (D)



PDSUB 10A 10" 400 Watt Front-Firing Powered Subwoofer

- Gain Control for Volume Adjustment
- Adjustable Low Pass 50Hz to 150 Hz
- Phase Switch 0-180°
- High Level (Speaker Level) Binding Post Inputs
- Low Level RCA Inputs and Outputs
- 10" Coated Paper Cone w/ Rubber Edge
- Discrete A/ B Class Amplifier
- 200 Watts RMS/ 400 Watts Peak
- Frequency Response: 35Hz-300 Hz
- Dimensions: 15.2" (H) x 14.4" (W) x 15.2" (D)



PDSUB 12A 12" 500 Watt Front-Firing Powered Subwoofer


- Gain Control for Volume Adjustment
- Adjustable Low Pass 50Hz to 150 Hz
- Phase Switch 0-180°
- High Level (Speaker Level) Binding Post Inputs
- Low Level RCA Inputs and Outputs
- 12" Coated Paper Cone w/ Rubber Edge
- Discrete A/ B Class Amplifier
- 250 Watts RMS/ 500 Watts Peak
- Frequency Response: 40Hz-350 Hz
- Dimensions: 17.2" (H) x 16.2" (W) x 16.2" (D)



PDWPSBK 5" Weatherproof Indoor/ Outdoor Full Range Two-Way Multi-Mount Speaker Enclosures (black)

PDWPSWT 5" Weatherproof Indoor/ Outdoor Full Range Two-Way Multi-Mount Speaker Enclosures (white)

- 5" Paper Cone Treated Woofer with 1" Titanium Tweeter
- Built in Two-Way Crossover Network
- Marine Grade ABS Plastic Enclosure
- Bass Reflex Port for Maximum Bass Response
- 50 Oz Magnet Structure
- 150 Oz Magnet Structure
- Frequency Response: 30HZ - 22KHZ
- 4 oHM Speaker Impedance
- Built-In Spring Loaded Wall Mounting Options
- Quick Connect Speaker Terminals
- Stainless Steel Mounting Brackets, Grills and Hardware Included
- Dimensions: 8.2"(W)x 6.2"(H) x 6.6"(D)

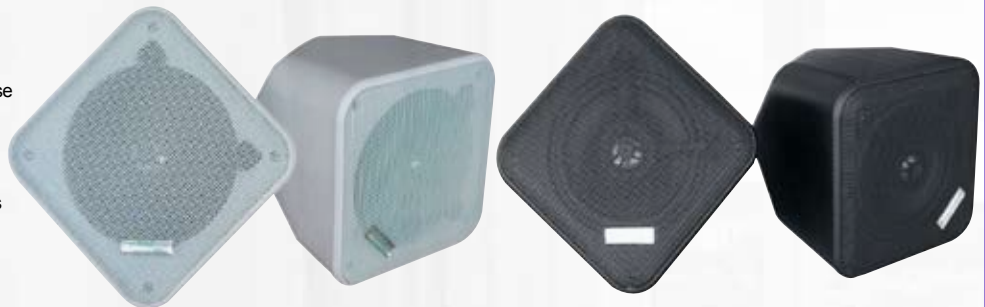

PDWR30B 3.5" Indoor/Outdoor Waterproof Speakers (Black)

- Excellent for Use On Boats/ Marine/ Decks/ Patios/ Poolside/ Outdoors
- Completely Water Proof
- 3.5" Aluminum Injection Cone Woofer
- 40 Oz. Magnet Structure
- 1" High Compliance Mylar Tweeter
- Capacitor Crossover Network
- Bass Reflex Vent for Added Bass Response
- Heavy Duty ASB Construction
- Quick Connect/ Disconnect Speaker Terminals
- Unique Spring Loaded Mounting System
- Removable Rustproof Mesh Grills
- Power: 150Watts RMS/ 300Watts Peak
- Frequency Response: 60-20K Hz
- Impedance: 4 Ohms
- Dimensions: 4.75"(W)x 7.25"(H) x 4.75"(D)



PDWR30W 3.5" Indoor/Outdoor Waterproof On-Wall Speakers (White)

- Excellent for Use On Boats/ Marine/ Decks/ Patios/ Poolside/ Outdoors
- Completely Water Proof
- 3.5" Aluminum Injection Cone Woofer
- 40 Oz. Magnet Structure
- 1" High Compliance Mylar Tweeter
- Capacitor Crossover Network
- Bass Reflex Vent for Added Bass Response
- Heavy Duty ASB Construction
- Quick Connect/ Disconnect Speaker Terminals
- Unique Spring Loaded Mounting System
- Removable Rustproof Mesh Grills
- Power: 150Watts RMS/ 300Watts Peak
- Frequency Response: 60-20K Hz
- Impedance: 4 Ohms
- Dimensions: 4.75"(W)x 7.25"(H) x 4.75"(D)





Product Line

PDWR40W

5.25" Indoor/Outdoor Waterproof Speakers (White)

- Excellent for Use On Boats/ Marine/ Decks Patios/ Poolside/ Outdoors
- Completely Water Proof
- 5.25" Aluminum Injection Cone Woofer
- 40 Oz. Magnet Structure
- 1" High Compliance Mylar Tweeter
- Capacitor Crossover Network
- Bass Reflex Vent for Added Bass Response
- Heavy Duty ASB Construction
- Quick Connect/ Disconnect Speaker Terminals
- Unique Spring Loaded Mounting System
- Removable Rustproof Mesh Grills
- Power: 200 Watts RMS/ 400Watts Peak
- Frequency Response: 40-22K Hz
- Impedance: 4 Ohms
- Dimensions: 6.25"(W)x 9.25"(H) x 5.75"(D)



PDWR40B

5.25" Indoor/Outdoor Waterproof Speakers (Black)

- Excellent for Use On Boats/ Marine/ Decks/ Patios/ Poolside/ Outdoors
- Completely Water Proof
- 5.25" Aluminum Injection Cone Woofer
- 40 Oz. Magnet Structure
- 1" High Compliance Mylar Tweeter
- Capacitor Crossover Network
- Bass Reflex Vent for Added Bass Response
- Heavy Duty ASB Construction
- Quick Connect/ Disconnect Speaker Terminals
- Unique Spring Loaded Mounting System
- Removable Rustproof Mesh Grills
- Power: 200Watts RMS/ 400Watts Peak
- Frequency Response: 40-22K Hz
- Impedance: 4 Ohms
- Dimensions: 6.25"(W)x 9.25"(H) x 5.75"(D)



PDWR50W

6.5" Indoor/Outdoor Waterproof Speakers (White)

- Excellent for Use On Boats/ Marine/ Decks Patios/Poolside/ Outdoors
- Completely Water Proof
- 6.5" Aluminum Injection Cone Woofer
- 50 Oz. Magnet Structure
- 1" High Compliance Mylar Tweeter
- Capacitor Crossover Network
- Bass Reflex Vent for Added Bass Response
- Heavy Duty ASB Construction
- Quick Connect/ Disconnect Speaker Terminals
- Unique Spring Loaded Mounting System
- Removable Rustproof Mesh Grills
- Power: 250Watts RMS/ 500Watts Peak
- Frequency Response: 30-22K Hz
- Impedance: 4 Ohms
- Dimensions: 7.2"(W)x 11.6"(H) x 6.4"(D)



PDWR50B

6.5" Indoor/Outdoor Waterproof Speakers (Black)

- Excellent for Use On Boats/ Marine/ Decks Patios/Poolside/ Outdoors
- Completely Water Proof
- 6.5" Aluminum Injection Cone Woofer
- 50 Oz. Magnet Structure
- 1" High Compliance Mylar Tweeter
- Capacitor Crossover Network
- Bass Reflex Vent for Added Bass Response
- Heavy Duty ASB Construction
- Quick Connect/ Disconnect Speaker Terminals
- Unique Spring Loaded Mounting System
- Removable Rustproof Mesh Grills
- Power: 250Watts RMS/ 500Watts Peak
- Frequency Response: 30-22K Hz
- Impedance: 4 Ohms
- Dimensions: 7.2"(W)x 11.6"(H) x 6.4"(D)



PDWR33

3.5" Indoor/Outdoor Waterproof Wall Mount Speakers

- Rugged Plastic Enclosure
- 3.5" Long Throw Woofer w/ 30oz Magnet
- 1/2" Polyamide Dome Tweeter
- 100 Watts RMS/200 Watts Power
- Frequency Response: 100Hz-20KHz
- Average Sensitivity: 88dB @ 1W/1M
- 8 Ohm Impedance
- Spring Loaded U Mounting Brackets Included
- Dimensions: 5-5/8"W x 8"H x 4-7/8"D



PDWR3T

3.5" Indoor/Outdoor Waterproof Speakers w/15 Watt 70V Transformer

- Rugged Plastic Enclosure
- 3.5" Long Throw Woofer w/ 30oz Magnet
- 1/2" Polyamide Dome Tweeter
- 100 Watts RMS/200 Watts Power
- Frequency Response: 100Hz-20KHz
- Average Sensitivity: 88dB @ 1W/1M
- 8 Ohm Impedance
- Spring Loaded U Mounting Brackets Included
- 15 Watt 70V Transformer
- Tapping at: 3.75W, 7.5W and 15W
- Indoor/Outdoor Equalization Switch
- Dimensions: 5-5/8"W x 8"H x 4-7/8"D



PDWR53

5.25" Indoor/Outdoor Waterproof Wall Mount Speakers

- Rugged Plastic Enclosure
- 5.25" Long Throw Woofer w/ 40oz Magnet
- 1/2" Polyamide Dome Tweeter
- 125 Watts RMS/250 Watts Power
- Frequency Response: 85Hz-20KHz
- Average Sensitivity: 92dB @ 1W/1M
- 8 Ohm Impedance
- Spring Loaded U Mounting Brackets Included
- Dimensions: 7-1/8"W x 9-7/8"H x 5-3/4"D



PDWR5T

5.25" Indoor/Outdoor Waterproof Speakers w/30 Watt 70V Transformer

- Rugged Plastic Enclosure
- 5.25" Long Throw Woofer w/ 40oz Magnet
- 1/2" Polyamide Dome Tweeter
- 125 Watts RMS/250 Watts Power
- Frequency Response: 85Hz-20KHz
- Average Sensitivity: 92dB @ 1W/1M
- 8 Ohm Impedance
- Spring Loaded U Mounting Brackets Included
- 30 Watt 70V Transformer
- Tapping at: 7.5W, 15W and 30W
- Indoor/Outdoor Equalization Switch
- Dimensions: 7-1/8"W x 9-7/8"H x 5-3/4"D



PDWR63

6.5" Indoor/Outdoor Waterproof On Wall Speakers

- Rugged Plastic Enclosure
- 6.5" Long Throw Woofer w/ 60oz Magnet
- 1" Polyamide Dome Tweeter
- 150 Watts RMS/350 Watts Power
- Frequency Response: 50Hz-20KHz
- Average Sensitivity: 94dB @ 1W/1M
- 8 Ohm Impedance
- Spring Loaded U Mounting Brackets Included
- Dimensions: 9-1/4"W x 13"H x 7-1/4"(D)



PDWR6T

6.5" Indoor/Outdoor Waterproof Wall Mount Speakers w/50 Watt 70V Transformer

- Rugged Plastic Enclosure
- 6.5" Long Throw Woofer w/ 60oz Magnet
- 1" Polyamide Dome Tweeter
- 150 Watts RMS/350 Watts Power
- Frequency Response: 50Hz-20KHz
- Average Sensitivity: 94dB @ 1W/1M
- 8 Ohm Impedance
- Spring Loaded U Mounting Brackets Included
- 50 Watt 70V Transformer
- Tapping at: 12.5W, 25W & 50W
- Indoor/Outdoor Equalization Switch
- Dimensions: 9-1/4"W x 13"H x 7-1/4"(D)



PDWR68B

500 Watt 3 Way Black Indoor/Outdoor Waterproof Center Channel Speakers (Black)

- Dual High Impact ABS Plastic Cabinets.
- Wall-mount Indoor/Outdoor Stereo Speakers
- Three 3" Woofer With Cloth Edge.
- 1" Aluminum Voice Coil.
- 500 Watts Max Power.
- Wide Sound Field for Larger Outdoor Areas
- Frequency Response: 80--20K HZ(+/-3dB).
- Sensitivity:92dB@1W/M.
- 6 Ohms Impedance
- Dimensions: 12.25"W x 4.65"H x 5.5"D
- Sold as a pair





Product Line

PDWR68W

500 Watt 3 Way Indoor/Outdoor Waterproof Center Channel Speakers (White)

- Dual High Impact ABS Plastic Cabinets.
- Wall-mount Indoor/Outdoor Stereo Speakers
- Three 3" Woofer With Cloth Edge.
- 1" Aluminum Voice Coil.
- 500 Watts Max Power.
- Wide Sound Field for Larger Outdoor Areas
- Frequency Response: 80--20K HZ(+3dB).
- Sensitivity:92dB@1W/M.
- 6 Ohms Impedance
- Dimensions: 12.25"W x 4.65"H x 5.5"D
- Sold as a pair



PHSP101T

9.7" Indoor / Outdoor 20 Watt PA Horn Speaker w/ 70V Transformer

- Aluminum Housing
- Power/Load Rating: 20 Watts RMS
- Nominal Impedance: 8 Ohms
- 70 Volt Transformer Tapping @ 20 / 10 / 5
- Frequency Range: 400 Hz - 5 KHz
- SPL(@ 1W/1m): 102dB
- Mounting Bracket & Hardware Included
- Dimensions: 9.7" H x 9.7" W x 11.3" D
- Color: Grey



PHSP10TA

5.6" Indoor/Outdoor 70 Volt PA Horn Speaker

- Aluminum Housing
- Power/Load Rating: 10 Watts
- Nominal Impedance: 8 Ohms
- 70 Volt Transformer Tapping @ 10 / 5 / 2.5 / 1.25
- Frequency Range: 400 Hz - 10 KHz
- SPL(@ 1W/1m): 105dB
- Mounting Bracket & Hardware Included
- Dimensions: 5.6" H x 5.6" W x 8.3" D
- Color: White



PHSP12

12.7" Indoor / Outdoor 60 Watt PA Horn Speaker w/70-100V Transformer

- Aluminum Housing
- Power/Load Rating: 60 Watts RMS
- Nominal Impedance: 16 Ohms
- 70 Volt Transformer Tapping @ 60 / 30 / 15 / 7.5
- 100 Volt Transformer Tapping @ 60 / 30 / 15
- Frequency Range: 400 Hz - 5 KHz
- SPL(@ 1W/1m): 103dB
- Mounting Bracket & Hardware Included
- Dimensions: 12.7" H x 12.7" W x 14" D
- Color: Grey



PHSP12K

10.2" Indoor / Outdoor 55 Watt PA Horn Speaker

- Aluminum Housing
- Power/Load Rating: 55 Watts
- Nominal Impedance: 8 Ohms
- Frequency Range: 400 Hz - 5 KHz
- SPL(@ 1W/1m): 105dB
- Mounting Bracket & Hardware Included
- Dimensions: 10.2" H x 10.2" W x 9" D
- Color: Grey



PHSP12IT

11" Indoor / Outdoor 30 Watt PA Horn Speaker w/ 70V Transformer

- Aluminum Housing
- Power/Load Rating: 30 Watts RMS
- Nominal Impedance: 8 Ohms
- 70 Volt Transformer Tapping @ 30 / 15 / 7.5
- Frequency Range: 400 Hz - 5 KHz
- SPL(@ 1W/1m): 103dB
- Mounting Bracket & Hardware Included
- Dimensions: 11" H x 11" W x 13.1" D
- Color: Grey



PHSP13IT

13.5" Indoor / Outdoor 50 Watt PA Horn Speaker w/ 70V Transformer

- Aluminum Housing
- Power/Load Rating: 50 Watts RMS
- Nominal Impedance: 8 Ohms
- 70 Volt Transformer Tapping @ 50 / 25 / 12.5
- Frequency Range: 400 Hz - 5 KHz
- SPL(@ 1W/1m): 105dB
- Mounting Bracket & Hardware Included
- Dimensions: 13.5" H x 13.5" W x 14.3" D
- Color: Grey



PHSP15TA

8.2" Indoor/Outdoor 70 Volt PA Horn Speaker

- Aluminum Housing
- Power/Load Rating: 15 Watts
- Nominal Impedance: 8 Ohms
- 70 Volt Transformer Tapping @ 15 / 7.5 / 3.75 / 1.85
- Frequency Range: 400 Hz - 10 KHz
- SPL(@ 1W/1m): 106dB
- Mounting Bracket & Hardware Included
- Dimensions: 8.2" H x 8.2" W x 10.8" D
- Color: White



PHSP16

16" Indoor / Outdoor 80 Watt PA Horn Speaker w/ 70-100V Transformer

- Aluminum Housing
- Power/Load Rating: 80 Watts RMS
- Nominal Impedance: 16 Ohms
- 70 Volt Transformer Tapping @ 80 / 40 / 30 / 10
- 100 Volt Transformer Tapping @ 80 / 40 / 20
- Frequency Range: 400 Hz - 5 KHz
- SPL(@ 1W/1m): 105dB
- Mounting Bracket & Hardware Included
- Dimensions: 16" H x 16" W x 16.5" D
- Color: Grey



PHSP20

19.5" Indoor / Outdoor 100 Watt PA Horn Speaker w/ 70V Transformer

- Aluminum Housing
- Power/Load Rating: 100 Watts RMS
- Nominal Impedance: 16 Ohms
- 70 Volt Transformer Tapping @ 100 / 50 / 25 / 12.5
- 100 Volt Transformer Tapping @ 100 / 50 / 25
- Frequency Range: 400 Hz - 5 KHz
- SPL(@ 1W/1m): 105dB
- Mounting Bracket & Hardware Included
- Dimensions: 19.5" H x 19.5" W x 19" D
- Color: Grey





Product Line

PHSP30TA 9.4" Indoor/Outdoor 70 Volt PA Horn Speaker

- Aluminum Housing
- Power/Load Rating: 30 Watts
- Nominal Impedance: 8 Ohms
- 70 Volt Transformer Tapping @ 30 / 15 / 7.5 / 3.5
- Frequency Range: 400 Hz - 10 KHz
- SPL(@ 1W/1m): 108dB
- Mounting Bracket & Hardware Included
- Dimensions: 9.4" H x 9.4" W x 12" D
- Color: White



PHSP4 6" Indoor / Outdoor 50 Watts PA Horn Speaker

- Power/Load Rating: 50 Watts
- Nominal Impedance: 8 Ohms
- Frequency Range: 500 Hz - 5 KHz
- SPL(@ 1W/1m): 100dB
- Mounting Bracket & Hardware Included
- Dimensions: 6" H x 4" W x 8" D



PHSP5 8" Indoor / Outdoor 65 Watt PA Horn Speaker

- Power/Load Rating: 65Watts
- Nominal Impedance: 8 Ohms
- Frequency Range: 500 Hz - 5 KHz
- SPL(@ 1W/1m): 101dB
- Mounting Bracket & Hardware Included
- Dimensions: 8" H x 4.5" W x 9" D



PHSP6K 6.3" Indoor / Outdoor 25 Watt PA Horn Speaker

- Aluminum Housing
- Power/Load Rating: 25 Watts
- Nominal Impedance: 8 Ohms
- Frequency Range: 400 Hz - 6 KHz
- SPL(@ 1W/1m): 100dB
- Mounting Bracket & Hardware Included
- Dimensions: 6.3" H x 6.3" W x 6.1" D
- Color: White



PHSP8K 8.1" Indoor / Outdoor 50 Watt PA Horn Speaker

- Aluminum Housing
- Power/Load Rating: 50 Watts
- Nominal Impedance: 8 Ohms
- Frequency Range: 400 Hz - 6 KHz
- SPL(@ 1W/1m): 103dB
- Mounting Bracket & Hardware Included
- Dimensions: 8.1" H x 8.1" W x 7.9" D
- Color: White



PSTND I 2

Heavy Duty Steel Tripod Bookshelf Speaker Stand

- Speaker Stand For A Large Bookshelf Speaker
- Heavy-Duty Steel Construction With Black Finish
- Conceals Cables For A Great Looking Setup
- Tripod Base Provides Security And Strength
- Adjustable Spikes On Bottom For Additional Stability
- Maximum Weight Capacity: 100lbs.
- Setup Height:30"
- Product Weight: 7.5lbs
- Top Plate Dimensions:8"x 6"

NEW FOR 2011



PSTND I 3

Heavy Duty Steel Double Support Bookshelf Speaker Stand

- Speaker Stand For A Bookshelf / Monitor Speaker Stand
- Perfect For Home, Project Or Professional Recording Studios
- All-Steel, Attractive Design Incorporating Cable Management
- Vertical Columns May Be Sand Loaded To Deaden Sound And Increase Stability
- Heavy-Duty Steel Construction With Black Finish
- Conceals Cables For A Great Looking Setup
- Double-Support Provides Security And Strength With Style
- Adjustable Spikes On Bottom For Additional Stability
- Maximum Weight Capacity: 35.0Lbs.
- Setup Height: 13"
- Product Weight:5.6Lbs
- Tube Diameter:2 Pcs X 1.2" x 12.0"
- Base Plate Size :8.30" x 11.30"

NEW FOR 2011



PSTND I 4

Heavy-Duty Steel Triple Support Bookshelf / Monitor Speaker Stand

- Speaker Stand For A Large Bookshelf Speaker
- Perfect For Home, Project Or Professional Recording Studios
- Steel, Attractive Design Incorporating Cable Management
- Vertical Columns May Be Sand Loaded To Deaden Sound And Increase Stability
- Heavy-Duty Steel Construction With Black Finish
- Conceals Cables For A Great Looking Setup
- Triple-Support Provides Security And Strength With Style
- Adjustable Spikes On Bottom For Additional Stability
- Maximum Weight Capacity: 75lbs.
- Setup Height: 38"
- Product Weight: 8.90 Lbs.
- Base Plate Size:8.3" x 11.3"
- Top Plate Dimensions: 7" X 9.5"
- Tube Diameter:4 Pcs X 1.2" x 36.0"
- Dimensions: 3.1" X 9.8" X 36.2"

NEW FOR 2011



PSTND I 6

Heavy Duty Steel Triangle Base Height Adjustable Bookshelf Speaker Stand

- Speaker Stand For A Bookshelf Speaker
- Designed For Home, Project And Professional Recording Studios
- Stable, Three-Point Triangle Base With Adjustable Leveling Floor Spikes
- Heavy-Duty Steel Construction With Black Finish
- Conceals Cables For A Great Looking Setup
- Double-Support Provides Security And Strength With Style
- Adjustable Spikes On Bottom For Additional Stability
- Maximum Weight Capacity: 100Lbs
- Setup Height from 24." - 47.5"
- Product Weight: 10.6 Lbs.
- Top Plate Dimensions:9" X 9"
- Weight Capacity: 100lbs

NEW FOR 2011



PHSTD I

Adjustable Height Home Theater Speaker Stands

- Universal Speaker Stands
- Heavy Duty Iron Cast Construction For Durability and Stability. Adjustable Height from 29" to 50" to Ensure Perfect and Customized Sound
- 2 Sizes of Mounting Brackets and Double-Tape Ensure Correct Installation
- Concealed Wire Path Provides The Ultimate Wire Management Solution
- Easy Assembly and Installation of Speakers
- Stable 3-legged Base with Black Finish
- Holds 2 Satellite Speakers
- Dimensions: 13"L x 3"W x 24"H
- Weight: 2.5 Lbs
- Sold As: 1 Pair

NEW FOR 2011



PLFPL3

5.25" 2-Way Waterproof Light Column Garden Speaker

- Unique Shape made of Fiberglass Strengthened Plastic
- Low-Voltage LED Light Included
- 13mm Poly Dome Tweeter, Neodymium Magnet
- 5.25" PP Carbon Cone Woofer
- Built-In Transformer: Input: 50W/70V, Output: 50W/25W,
- 8 ohm
- Power Handling RMS: 40 Watts
- Power Handling Peak: 80 Watts
- Frequency Response: 90~20kHz
- Switch for 70V or 8 ohm
- Sensitivity: 88.5 dB
- Dimensions: 14.96"W x 34.25"H



PLWFT1

6.5" 2-Way Waterproof Fountain Rock Garden Speaker

- Unique Shape made of Fiberglass Strengthened Plastic w/ Rock-like Textured Finish
- Water-proof Pump and Light (4pcs) Included
- 13mm Polyether Imide Dome Tweeter, Neodymium Magnet
- 6.5" PP Carbon Cone Woofer
- Built-In Transformer: Input: 50W/70V, Output: 50W/25W,
- 8 ohm
- Power Handling RMS: 50 Watts
- Power Handling Peak: 100 Watts
- Frequency Response: 70~20kHz
- Switch for 70V or 8 ohm
- Sensitivity: 88.5 dB
- Dimensions: 37.01"L x 37.01"W x 31.50"H



PLWFT2

5.25" 2-Way Waterproof Fountain Rock Garden Speaker

- Unique Shape made of Fiberglass Strengthened Plastic w/ Rock-like Textured Finish
- Water-proof Pump and Light (3pcs) Included
- 13mm Polyether Imide Dome Tweeter, Neodymium Magnet
- 5.25" PP Carbon Cone Woofer
- Built-In Transformer: Input: 50W/70V, Output: 50W/25W,
- 8 ohm
- Power Handling RMS: 40 Watts
- Power Handling Peak: 80 Watts
- Frequency Response: 90~20kHz
- Switch for 70V or 8 ohm
- Sensitivity: 88.5 dB
- Dimensions: 25.98"L x 15.75"W x 36.22"H



PLWFT3

6.5" 2-Way Waterproof Fountain Rock Garden Speaker

- Unique Shape made of Fiberglass Strengthened Plastic w/ Rock-like Textured Finish
- Water-proof Pump and Light (3pcs) Included
- 13mm Polyether Imide Dome Tweeter, Neodymium Magnet
- 6.5" PP Carbon Cone Woofer
- Built-In Transformer: Input: 50W/70V, Output: 50W/25W,
- 8 ohm
- Power Handling RMS: 50 Watts
- Power Handling Peak: 100 Watts
- Frequency Response: 70~20kHz
- Switch for 70V or 8 ohm
- Sensitivity: 88.5 dB
- Dimensions: 29.13"L x 23.62"W x 32.68"H



2011





Product Line





www.pyleaudio.com

1600 63rd Street • Brooklyn, N.Y. • 11204 • 718 535-1800 • 800 444-5671 • FAX: 718 236-2400