

The SCN56 is a superior siding tool that drives full round head nails from 1-7/8" to 2-1/2" in length and from .092 to .099 nail shank diameter. The SCN56 is a lightweight, rugged and dependable multi-purpose coil Nailer. The SCN56 coil Nailer has a unique mode of operation. The SCN56 allows the operator to select either a dual action or restrictive mode of fastening by simply switching the trigger – No need to change parts!



### Applications:

Siding, exterior decks, decking, exterior trim, fencing, subflooring, wood shingles, crate and box assembly and floor sheathing.

### Features and Benefits:


- Switchable trigger — Allows the operator to select the fastening mode (Dual action or restrictive)
- Dual collation — Allows the choice between wire weld and Senco plastic sheet collation. (Plastic sheet collation is limited to direct industrial customers at this time.)
- Adjustable depth of drive — Allows for consistent and controllable drive
- Comfort grip — Reduces operator fatigue
- Adjustable exhaust deflector — Direct air in a variety of directions
- Detachable no-mar pad — Protects work surfaces
- Fastener Range — 1-7/8" — 2-1/2"
- Light weight — 5.8 lb
- High load capacity — Holds up to 350 nails

### Tool Specifications:

Item #: 990001N - Switchable triggering system  
Tool Weight: (Unloaded) 6 lbs. (2.73 kg)  
Height: 12" (270 mm)  
Length: 12-1/2" (280 mm)  
Collation: Wire weld coil  
Mode of Operation: Switchable triggering system – either sequential or contact actuation trigger mechanism.  
Hose Fitting: 1/4" NPT

### Fastener Specifications:

Drives full round head nails from 1-7/8" — 2-1/2" in length and from .092 — .099 nail shank diameter.

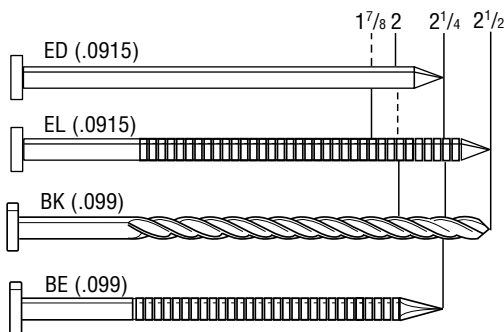

**Sequential Actuation Trigger** (also known as restrictive trigger or trigger fire) operates in the following sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

**Contact Actuation Trigger** (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions or log on to [www.senco.com](http://www.senco.com) or call 1-800-543-4596 for more information on Senco's trigger systems. Choose the right trigger system for your specific needs!

For additional information on how Senco Power Fastening Systems will save you time, reduce costs, and increase quality, call our toll-free Action Line: 1-800-543-4596 to find your nearest Authorized Senco Dealer or Distributor. Visit our web site at: [www.senco.com](http://www.senco.com)