


















Photo	Model	Description	
IP GN Series			
(Software for 64 Camera recording plus many features, Pls ask) All Compatible with GI & GU Models via ONVIF			
	GND20	IP Vandal Dome, 2MP@30ips, D/N(ICR), Vari Focal (3~9mm), Ø152mm, Audio, Alarm, SD Card, Tri- Power (DC12V, 24VAC, PoE), IP66	SF
	GNU30VIR	IP All-In-One Camera, 3MP@20ips, D/N (ICR), 32IR LED, Motorized 3x Zoom (3~9mm), Ø98.4mm, SD Card, Dual Power (DC12V, PoE), IP67	SF
IP 3MP GN Real Time Range			
	NVX-6316R	IP Vandal Dome, 3MP@30ips, D/N (ICR), 24IR LED, Fixed lens 3.7mm, Ø144mm, Audio, Alarm, SD Card, Dual Power (DC12V, PoE), IP66	o
	NUX-6313R	IP All-In-One Camera, 3MP@30ips, D/N (ICR), 24IR LED, Fixed lens 3.7mm, Ø66mm, Audio, Alarm, SD Card, Dual Power (DC12V, PoE), IP67	o
	NVX-6354R	IP Vandal Dome, 3MP@30ips, D/N (ICR), 36IR LED, Vari Focal (2.8~12mm), Ø146mm, Audio, Alarm, SD Card, Dual Power (DC12V, PoE), IP66	s
	NUX-6354R	IP All-In-One Camera, 3MP@30ips, D/N (ICR), 32IR LED, Vari Focal (2.8~12mm), Ø75mm, Audio, Alarm, SD Card, Dual Power (DC12V, PoE), IP66	s
IP 3MP GN Motorized Range			
	NVX-6374R	IP Vandal Dome, 3MP@30ips, D/N (ICR), 36IR LED, Motorized (2.8~12mm), Ø146mm, Audio, Alarm, SD Card, Dual Power (DC12V, PoE), IP66	o
	NUX-6374R	IP All-In-One Camera, 3MP@30ips, D/N (ICR), 32IR LED, Motorized (2.8~12mm), Ø75mm, Audio, Alarm, SD Card, Dual Power (DC12V, PoE), IP66	o
IP 5MP GN Motorized Range			
	NVX-6587R	IP Vandal Dome, 5MP@15ips, D/N (ICR), 28IR LED, Motorized (3.6~10mm), Ø144mm, Audio, Alarm, SD Card, Dual Power (DC12V, PoE), IP66	o
	NUX-6587R	IP All-In-One Camera, 5MP@15ips, D/N (ICR), 35IR LED, Motorized (3.6~10mm), Ø86mm, Audio, Alarm, SD Card, Dual Power (DC12V, PoE), IP66	o
IP 6MP GN Motorized Range			
	NVA-2611	IP Vandal Dome, 6MP@30ips, D/N (ICR), 28IR LED, Motorized (3.6~10mm), Ø144mm, Audio, Alarm, SD Card, Dual Power (DC12V, PoE), IP66	o
	NUA-2611	IP All-In-One Camera, 6MP@30ips, D/N (ICR), 35IR LED, Motorized (3.6~10mm), Ø86mm, Audio, Alarm, SD Card, Dual Power (DC12V, PoE), IP66	o
IP WDR GN Range			
	NBX-2201	IP Box Camera, 2MP@60ips, WDR, D/N (ICR), Audio, Built-in Mic, Alarm, SD Card, RCA Video Output, RS485, Tri- Power (DC12V, 24VAC, PoE)	o
	NDX-2221	IP Dome, 2MP@60ips, D/N (ICR), WDR, Vari Focal (3~9mm), Ø94mm, Audio, Alarm, SD Card, Dual Power (DC12V, PoE)	o
	NUX-2245D	IP All-In-One Camera, 2MP@60ips, D/N (ICR), WDR, 32IR LED, Motorized (2.8~11mm), Ø83mm, Audio, Alarm, SD Card, Dual Power (DC12V, PoE), IP66	o
	NVA-1311	IP Vandal Dome, 3MP@30ips, D/N (ICR), WDR, 28IR LED, Motorized (2.8~12mm), Ø144mm, Audio, Alarm, SD Card, Dual Power (DC12V, PoE), IP66	o
	NUA-1311	IP All-In-One Camera, 3MP@30ips, D/N (ICR), WDR, 35IR LED, Motorized (2.8~12mm), Ø86mm, Audio, Alarm, SD Card, Dual Power (DC12V, PoE), IP66	o
















Photo	Model	Description	
IP PTZ GN Range			
	NMX-22032D3	IP 20x Mini PTZ, 2MP@60ips, D/N (ICR), WDR, Audio, Alarm, SD Card, Tri- Power (DC12V, 24VAC, PoE), Vandal, IP66 Available with built-in Heater	O
	NMX-22032D3A	IP 20x Mini PTZ, 2MP@60ips, D/N (ICR), WDR, Audio, Alarm, SD Card, Tri- Power (DC12V, 24VAC, PoE), Including Vandal Outdoor Housing/heater/blower, IP66	O
	NFX-22033D1	IP 30x PTZ, 2MP@60ips, D/N (ICR), WDR, Audio, Alarm, SD Card, Tri- Power (DC12V, 24VAC, PoE).	O
	NFX-22033D1A	IP 30x PTZ, 2MP@60ips, D/N (ICR), WDR, Audio, Alarm, SD Card, Tri- Power (DC12V, 24VAC, PoE), Including Vandal Outdoor Housing/heater/blower, IP66	O
	NFX-22153D1	IP 30x PTZ, 2MP@60ips, D/N (ICR), WDR, Synchronized IR LED & Fixed IR LED (400m), Audio, Alarm, SD Card, Dual Power (DC12V, PoE+), IP66	O
	NFX-22153H3	IP 30x PTZ, 2MP@60ips, D/N (ICR), WDR, Synchronized IR LED & Fixed IR LED (500m), Audio, Alarm, SD Card, Dual Power (DC12V, PoE+), IP66	O
	GNS230IRO	30x PTZ, 2.2MP@60ips, Hybrid IP, HD-SDI & Analog, D/N (ICR), 2 Motorized Zoom IR (250m), WDR, Alarm, AC24V, Including Vandal Outdoor IP66/ Heater/ Blower/ Wiper & pre-cabled through plus Wall Mounting Brackets included	O
IP Special Application GN Range			
	NEX-3285	IP ATM Pin Hole, 2MP@30ips, WDR, 4.3mm, Audio, Alarm, SD Card, Dual Power (DC12V, PoE)	O
	NZX-2203D1	IP 30x Zoom, 2MP@60ips, D/N (ICR), WDR, Audio, Alarm, SD Card, Tri- Power (DC12V, 24VAC, PoE)	O
	NVX-6585R	IP P/T Camera, 5MP@15ips, D/N (ICR), 30IR LED, Motorized (3.6~10mm), Ø147mm, Audio, Alarm, SD Card, Dual Power (DC12V, PoE), IP66	O
	NAX-2210D1H	IP 10x Zoom, License Plate Capture, 2MP@60ips, D/N (ICR), WDR, 32IR LED, Audio, Alarm, SD Card, Audio, Alarm, SD Card, Dual Power (DC12V, PoE), IP66.	O
	GNQ20L	IP Qube Wi-Fi Camera, 2MP (1600x1200)@15ips, Fixed lens 2.6mm, PIR, White LED, Mic, Speaker, SD Card, DC5V	SF
	GNU20L	IP All-In-One Camera, 2MP@30ips, D/N (ICR), 20IR LED, Fixed lens 3.7mm, Ø60mm, Alarm, SD Card, Tri- Power (DC12V, 24VAC, PoE), IP67	SF
IP GI Series			
All GI Series IP Cameras: Bi / Tri-Codec: H.264, MPEG4 & MJPEG, Bi / Tri / Quad-Stream at 30ips each, plus: D-WDR, Motion Detection, Motion Adaptive Transmission, Event Detection, Event Action, FTP Upload, Video Analytics: Trip Zone & Tampering +++ iNEX Basic 32ch. Recording & Management, WebGuard, iRAS, iRAS Mobile & RASMobile. All IP Products are ONVIF			
IP Box Cameras			
	GIC00L	IP Box Camera, D1@30ips, D/N (DSS), RCA Video Output, Dual Power (DC12V, PoE)	SF
	GIC10M	IP Box Camera, 1MP@30ips, D/N (ICR), Audio, Built-in Mic, Alarm, SD Card, RCA Video Output, RS485, Dual Power (DC12V, PoE)	SF
	GIC20M	IP Box Camera, 2MP@30ips, D/N (ICR), Audio, Built-in Mic, Alarm, SD Card, RCA Video Output, RS485, Dual Power (DC12V, PoE)	SF
	GIC20MW	IP Box Camera, 2MP@30ips, WDR, D/N (ICR), Audio, Built-in Mic, Alarm, SD Card, RCA Video Output, RS485, Dual Power (DC 12V, PoE)	SF
	GIC30M	IP Box Camera, 3MP@15ips, D/N (ICR), Audio, Built-in Mic, Alarm, SD Card, RCA Video Output, RS485, Dual Power (DC12V, PoE)	SF
















Photo	Model	Description	
	GIC03	IP Box Camera, D1@30ips, D/N (ICR), Audio, Built-in Mic, Alarm, SD Card, BNC Video Output, RS485, Tri-Power (DC12V, AC24V & PoE)	CLR
	GIC10A	IP Box Camera, 1MP@30ips, D/N (ICR), Audio, Built-in Mic, Alarm, SD Card, BNC Video Output, RS485, Tri-Power (DC12V, AC24V & PoE)	CLR
	GCA0412M3	3MP Lens, 1/2" 4-12mm, Vari Focal Auto DC Iris Lens, 1.4-360	S
	GCA2812M2	2MP Lens, 1/2.7" 2.8-12mm, Vari Focal Auto DC Iris Lens (CH)	S
	<i>A wider range of lenses is available on special production basis; Pls ask</i>		
IP Dome D1 Cameras			
	GID03-IR	IP Dome, VGA@30ips, 12IR LED, Fixed lens 3.8mm, Ø80mm, Audio, Alarm, SD Card, Dual Power (DC12V, PoE)	SF
	GID00L-PF	IP Dome, D1@30ips, D/N (DSS), Fixed lens 3.8mm, Ø132mm, Dual Power (DC12V, PoE)	SF
	GID00L-PV	IP Dome, D1@30ips, D/N (ICR), Vari Focal (3.3-12mm), Ø159mm, Dual Power (DC12V, PoE)	SF
	GID00L-VVIR	IP Vandal, D1@30ips, D/N (ICR), 18IR LED, Vari Focal (3.3-12mm), Ø159mm, Dual Power (DC12V, PoE), IP66	SF
	GID03A	IP Vandal, D1@30ips, D/N (ICR), Vari Focal (3-9mm), Ø148mm, Audio, Alarm, SD Card, Tri-Power (DC12V, AC24V & PoE), IP66	SF
IP Dome 1MP Cameras			
	GID10L-PF	IP Dome, 1MP@30ips, D/N (DSS), Fixed lens 4mm, Ø132mm, Dual Power (DC12V, PoE)	SF
	GID10A	IP Vandal, 1MP@30ips, D/N (ICR), Vari Focal (3-9mm), Ø148mm, Audio, Alarm, SD Card, Tri-Power (DC12V, AC24V & PoE), IP66	SF
IP Dome 2MP & Higher Cameras			
	GID20M-VZIRW	IP Vandal, 2MP@30ips, H.265, WDR, D/N (ICR & DSS), 6IR LED, Motorized 3x Zoom (3.3-10mm), Ø155mm, Audio, Alarm, SD Card, Dual Power (DC 12V, PoE), IP66	TBA
	GID30M-VVIR	IP Vandal, 3MP@15ips, D/N (ICR), 18IR LED, Vari Focal (3-9mm), Ø159mm, Audio, Alarm, SD Card, Dual Power (DC12V, PoE), IP66	TBA
	DA-WM2100	Wall mount for GID20M-PZIR	S
	DA-WM2000	Wall mount for GID20M-VZIR & -VZIRWH	S
IP All-In-One Cameras			
	GIU10L-VFIR	IP All-In-One Camera, 1MP@30ips, D/N (ICR & DSS), 24IR LED, Fixed lens 6mm, Ø60mm, Vandal, PoE, IP66	SF
	GIU03-VIR	IP All-In-One Camera, D1@30ips, D/N (ICR & DSS), 42IR LED, Vari Focal (3.5-16mm), Ø76mm, Audio, DC12V, Vandal, IP66	SF
	GIU10-VIR	IP All-In-One Camera, 1MP@30ips, Heater, D/N (ICR & DSS), 42IR LED, Vari Focal (3.3-9mm), Ø76mm, Audio, DC12V, Vandal, IP66	SF
	GIU20M-VVIRH	IP All-In-One Camera, 2MP@30ips, Heater, D/N (ICR & DSS), 42IR LED, Motorized 3x Zoom (3-9mm), Ø90mm, Audio, Dual Power (DC12V, PoE), Vandal, IP66	TBA
	GIU20M-VVIRWH	IP All-In-One Camera, 2MP@30ips, H.265, WDR, Heater, D/N (ICR), 10IR LED, Motorized 3x Zoom (3.3-10mm), Ø76mm, Audio, Alarm, Dual Power (DC12V, PoE), Vandal, IP66	TBA
	GIU50-360	IP Fisheye Camera, 5MP@30ips, D/N(ICR), Viewing angle (180°H x 180°V), Ø155 mm, WDR, D-Zoom, Motion Detection, Audio, Alarm, SD Card, 360° Overview, Panoramic, Double Panoramic and Quad View, Dual Power (DC12V, PoE), Vandal, IP66	TBA
IP PTZ Cameras			
	GIS230VWH	IP 30x PTZ, 2MP@30ips, D/N (ICR), WDR, Heater, Audio, Alarm, SD Card, Tri-Power (DC12V, AC24V & PoE), Vandal, IP66	TBA
Wide Range of Wall Mount, Ceiling Mounts, Camera Mounts, Corner Mounts, Flush Housing, etc.			




Photo	Model	Description		
iNEX Enterprise IP VMS (Video Management Software) For IP Devices and DVRs				
	iNEX Basic	Bundled Management Software, Recording, Monitoring, Playback & Administration, Up to 256 Monitoring & up to 32 recording for G4S IP Devices. Up to 9 Tabs on separate monitors per station including Outstanding Event Management	Bundled	
iNEX Licenses				
	8 Ch.	Advanced Monitoring, Recording, Playback, Streaming & Administration, for up to 256 G4S IP Devices & 3rd Party on Multi servers, Tri-Codec Software as per below packages. Up to 64 Clients with up to 15 Tabs or separate Monitors per Client. including Outstanding Event Management Forwarding to other clients, Recording and Notification by pop up, sound, email ++++ Included FREE in any license: Central Monitoring & Management Software for G4S 1,024 DVRs &/or IP devices.		
	16 Ch.			
	32 Ch.			
	48 Ch.			
	64 Ch.			
	128 Ch.			
	256 Ch.			
	iNEX CMS (Central Management System)			
	iNEX CMS	Up to 1,024 DVR and/or IP Device Monitoring, DVR Playback, Setup, Upgrade, Video/Audio Clip-Copy. Centralized event handling & management with email notification, move PTZ to Preset, event acknowledgment and forwarding, Devices health and status check, full reporting system & up to 64 Maps with advanced capabilities. Up to 64 simultaneous users can access iNEX with different authority levels, up to 15 Tabs each can be monitored on a separate monitor.		
iNEX Services				
	iNEX Federation	Service to connect & manage multiple admin services together, to merge different iNEX systems in one system with huge number of cameras. It allows users to monitor, playback & control cameras, layouts, maps of multiple admin services. Also it keeps monitoring the status of the admin services and sends email notification in case of any failure of these services with the ability to monitor cameras on its Maps. Unlimited number of Ch.'s (license dependent) can be accessed with federation service.		
	Fed. 64 Ch.			
	Fed. 128 Ch.			
	Fed. 256 Ch.			
	Fed. 512 Ch.			
	Fed. 1,024 Ch.			
	Fed. 2,048 Ch.			
	Fed. 4,096 Ch.			
	Fed. Unlimited			
	iNEX Streaming	Service allows up to 64 users monitor video simultaneously to one or more devices through the streaming server, iNEX distributes streaming workload to several streaming servers by using the load balancing function, and it increases monitoring stability. If one of the streaming servers stops operating for any system problem, other streaming servers take that server's place within the limit of the number of channels that can be streamed. UP to 4 streaming services can be registered on one Admin service & up to 2,048 channels (license dependent) can be streamed using streaming service.		
	Strm. 512 Ch.			
	Strm. 1,024 Ch.			
	Strm. 2,048 Ch.			
	iNEX Backup	Service to archive the recorded video of iNEX recording servers and the recorded video of the DVRs on a separate server(s) and play it back. Backup process is defined by a detailed backup schedule to set the time, date the storage allocation of the backed up data. Up to 1,024 Ch. (license dependent) or 64 backup servers can be registered one Admin server.		
	Backup 64 Ch.			
	Backup 128 Ch.			
	Backup 256 Ch.			
	iNEX Video Wall	Service for central monitoring stations that allows control monitoring for a large number of displays using one or more INK1000 Keyboard, each service contains multiple video agent systems, each agent connects to a number of monitors all controlled by INK1000 Keyboard. The tabs of Live, playback, DVR Search, Map, Event, Event History, Report, Health & status tabs can be accessed by the Keyboard of video wall service. Up to 4 Video wall services can be registered on one admin service. Up to 64 Video agents (License dependent) can be registered one each service, each agent can connect up to 6 monitors.		
	Video Wall 2 agents			
	Additional agent			
	iNEX Failover	iNEX Failover Services consist of Admin, Federation, Video Wall & Recording Failover, enhancing the system stability as each failover service will replace the administration, recording, Video Wall or Federation service whenever an issue occurs in the service. Failover services are 1-1 service only, except Recording Failover can be up to 4-1		
	Admin			
	Federation			
	Video Wall			
	Recording			
	iNEX Recording Redundancy	Redundant Recording Service paired with the standard Recording service using same schedule as Recording server and parameters as live stream from the IP camera		









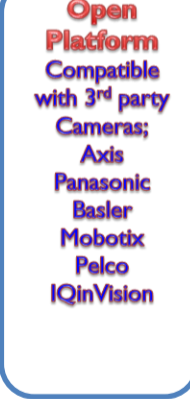


Photo	Model	Description	
Network NVR's Embedded RTOS & PC Based			
	GIN041	4Ch Embedded NVR, 1TB, 2MP@100ips, 2HDD, eSATA, 1/2 Rack 2U, iNEX Based	SF
	GIN041E	4Ch Embedded NVR, 1TB, 2MP@100ips, 2HDD, eSATA, 1/2 Rack 2U, iRAS Based	TBA
	GIN082	8Ch Embedded NVR, 1TB, 2MP@200ips, 2HDD, eSATA, 1/2 Rack 2U, iNEX Based	SF
	GIN082E	8Ch Embedded NVR, 1TB, 2MP@200ips, 2HDD, eSATA, 1/2 Rack 2U, iRAS Based	TBA
	GIN164	16Ch Embedded NVR, 2TB, 2MP@400ips, 2HDD, eSATA, 1/2 Rack 2U, iNEX Based	SF
	GIN164E	16Ch Embedded NVR, 1TB, 2MP@400ips, 2HDD, eSATA, 1/2 Rack 2U, iRAS Based	TBA
	GIN041P	4Ch Embedded POE NVR, 4Ch PoE, 1TB, 2MP@100ips, 2HDD, eSATA, HDMI & VGA Local Outputs, Audio Output, Alarm, iRAS Based	S
	GIN082P	8Ch Embedded POE NVR, 8Ch PoE, 1TB, 2MP@200ips, 2HDD, eSATA, HDMI & VGA Local Outputs, Audio Output, Alarm, iRAS Based	S
	GIN164P	16Ch Embedded POE NVR, 8Ch PoE, 1TB, 2MP@400ips, 2HDD, eSATA, HDMI & VGA Local Outputs, Audio Output, Alarm, iRAS Based	S
	GDH082L	Hybrid 8Ch Analog + 4Ch IP, 200/133ips@D1 (720H/ 960H), 2MP@70ips for IP, 1TB, 4-Audio in, Full HD Monitoring, Mirroring, Archiving, 3HDD, 3 Monitors, DVD-RW, eSATA	SF
	GDH164A	Hybrid 16Ch Analog + 16Ch IP, 400ips@D1, 2MP@70ips for IP, 2TB, 16-Audio in, Full HD Monitoring, Mirroring, Archiving, 5HDD, 5 Monitors, DVD-RW, Alarms, eSATA, iSCSI	SF
	GIN328H	Hybrid 16Ch Analog + Up to 32Ch IP, 400ips@D1, 2MP@960ips for IP, 2TB, 16-Audio in, Full HD Monitoring, Mirroring, 6HDD, 2 Monitors, Alarms, eSATA	O
	INK1000	Intelligent Network Controller, iNEX, iNEX Video Wall, GIN NVRs and iRAS control, Full Replica of all GIT, GIR, GIS, GIC, GID, GIU, DVR, PTZ & MMX through Network & Analog through 2xRS485, Jog Shuttle, USB Mouse, Movable Joystick (Up to 999 Camera Matrix with GIT/GIR configuration)	S
NVR's / DVR's Options			
All HDD must be from Approved list, any use of non Approved HDD results in the loss of the DVR Warranty			
	3 TB HDD	Pre-installed Additional Hard Disk (Price subject to change)	S
	4 TB HDD	Pre-installed Additional Hard Disk (Price subject to change)	S
	6 TB HDD	Pre-installed Additional Hard Disk (Price subject to change)	S
	DS104A	eSATA Storage expansion RAID, 4 HDD Bays, 1U, SATA Port Multiplier.	S
	HAS-08IE	Smart iSCSI RAID Storage, 8 HDD Bays, Remote Management SW, Hot Swappable HDDs, Up to 6TB/ HDD , Network Bonding (Failover & Load Balance), HDDs Failure Notice on LCD, Beep & email, Forecasts HDD failure, 2x Gigabit Ethernet Interfaces, 2U, 19" Rack Mountable	O
	HAS-16I	Smart iSCSI RAID Storage, 16 HDD Bays, Remote Management SW, Up to 6TB/ HDD , Network Bonding (Failover & Load Balance), HDDs Failure Notice on LCD, Beep & email, Forecasts HDD failure, 4x Gigabit Ethernet Interfaces, 3U, 19" Rack Mountable	O
IP Transmitters & Receivers			
	GIR01	1Ch IP Receiver, Tri-Codec, 30ips@D1, Audio, 1x BNC, 1x VGA, 1xUSB, DC5V	SF
	GIR04	4Ch IP Receiver, Tri-Codec, 60ips@D1, Audio, 1x BNC, 1x VGA, 1xUSB, DC5V, Quad Out	SF
	12Ch Rack	12x Bays, 4U Rack mounting Kits for GIR01/ 04 & GIT01	SF






















Photo	Model	Description	
PoE Switch			
	HAP-SW04	PoE Ethernet Switch, 4 PoE Ports, 60W PoE Output, Supports IEEE802.3, IEEE802.3u, IEEE802.3af/at, Surge Protection	O
	HAP-SW04F	PoE Ethernet Switch with optical uplink, 4 PoE Ports/ (1 Ethernet + 1 SFP(1 Gbps)) Uplink Ports, 60W PoE Output (expandable to 120W with extra adaptor), Supports IEEE802.3af/at, Surge Protection	S
	HAP-SW08	PoE Ethernet Switch, 8 PoE Ports, 120W PoE Output, Supports IEEE802.3af/at, Surge Protection	O
	HAP-SW08F	PoE Ethernet Switch with optical uplink, 8 PoE Ports/ (1 Ethernet + 1 SFP(1 Gbps)) Uplink Ports, 120W PoE Output (expandable to 240W with extra adaptor), Supports IEEE802.3af/at, Surge Protection	S
	HAP-SW24F	PoE Ethernet Managed Switch with optical uplink, 24 PoE Ports/ (1 Ethernet + 1 SFP (1 Gbps)) Uplink Ports, 380W PoE Output, Supports IEEE802.3af/at, Surge Protection	S
HD-TVI Technology, Please Ask.			
High Definition - Transport Video Interface (HD-TVI) is video transmission standard for Analog HD over coaxial infrastructure, allowing long distance HD transmission up to 500meters using the existing Analog infrastructure.			
	TV723CT	TVI Box, 2MP@30ips, D/N (ICR & DSS), OSD, WDR, TVI & CVBS Outputs, DC12V	S
	TV240DTL	TVI Indoor Dome, 2MP@30ips, 24IR LED, 3.6mm, Ø112mm, D/N (ICR & DSS), WDR, TVI & CVBS Outputs, DC12V	S
	TV350DTL	TVI Indoor Dome, 2MP@30ips, 28IR LED, 2.8~12mm, Ø129mm, D/N (ICR & DSS), OSD, WDR, TVI & CVBS Outputs, DC12V	S
	TV9610VTL	TVI Vandal Mini Dome, 2MP@30ips, 10IR LED, 3.6mm, Ø90mm, D/N (ICR & DSS), WDR, TVI & CVBS Outputs, DC12V, IP67	S
	TV160VTL	TVI Vandal Dome, 2MP@30ips, 28IR LED, 2.8~12mm, Ø129mm, D/N (ICR & DSS), OSD, WDR, TVI & CVBS Outputs, DC12V, IP67	S
	TV561HTL	TVI All-In-One, 2MP@30ips, 24IR LED, 3.6mm, Ø60mm, D/N (ICR & DSS), WDR, TVI & CVBS Outputs, DC12V, IP67	S
	TV560HTL	TVI All-In-One, 2MP@30ips, 42IR LED, 2.8~12mm, Ø71mm, D/N (ICR & DSS), OSD, WDR, TVI Output, DC12V, IP67	S
	TZ1568HTL	TVI 10x Zoom, 2MP@30ips, 42IR LED, 5.1mm ~ 51mm, D/N (ICR & DSS), OSD, WDR, TVI, EX-SDI & CVBS Output, DC12V, IP66	O
	TV045M	TVI ATM Pin Hole, 2MP@30ips, 3.7mm, TVI & CVBS Outputs, DC12V	S
	TMT-22032D3	TVI / AHD 20x PTZ Camera, 2MP@30ips, D/N (ICR), OSD, UTC Function, WDR, TVI, AHD & CVBS Outputs, Dual Power (DC12V, AC24V), IP66	O
	TFT-22033D1	TVI / AHD 30x PTZ Camera, 2MP@30ips, D/N (ICR), OSD, UTC Function, WDR, TVI, AHD & CVBS Outputs, Dual Power (DC12V, AC24V)	O
	TFT-22053D1	TVI / AHD 30x PTZ Camera, 2MP@30ips, Synchronized IR LED & Fixed IR LED (400m), D/N (ICR), OSD, UTC Function, WDR, TVI, AHD & CVBS Outputs, AC24V, IP66	O
	ED3304	Hybrid 4Ch. TVI & CVBS, 2MP@100ips, 1TB, Full HD Monitoring, HDMI & VGA Local Outputs, Audio, Alarm, 2HDD. iRAS Based	S
	SD3208	Hybrid 8Ch. TVI & CVBS, 2MP@100ips, 1TB, Full HD Monitoring, HDMI, VGA & BNC (SPOT) Local Outputs, Audio, Alarm, 4HDD, eSATA. iRAS Based	S
	SD3216	Hybrid 16Ch. TVI & CVBS, 2MP@200ips, 1TB, Full HD Monitoring, HDMI, VGA & BNC (SPOT) Local Outputs, Audio, Alarm, 4HDD, eSATA. iRAS Based	S
	XD3316	Hybrid 16Ch. TVI & CVBS, 2MP@400ips, 1TB, Full HD Monitoring, HDMI, VGA & BNC (SPOT) Local Outputs, Audio, Alarm, 4HDD, eSATA. iRAS Based	S





















Photo	Model	Description	
AHD Technology, Please Ask.			
AHD (Analog High Definition) is new technology for HD Analog video transmission over coaxial infrastructure, allowing long distance transmission at a considerable cost reduction using the existing Analog infrastructure.			
	HDGI-N31NPF3A32D	AHD Indoor Dome, 2MP@30ips, 24IR LED, 3.6mm, Ø120mm, D/N (ICR & DSS), AHD & CVBS Outputs, DC12V	O
	HDGI-N31NPV2A32D	AHD Indoor Dome, 2MP@30ips, 24IR LED, 2.8~12mm, Ø120mm, D/N (ICR & DSS), AHD & CVBS Outputs, DC12V	O
	HDGI-N31NPV2A7D	AHD Vandal Dome, 2MP@30ips, 30IR LED, 2.8~12mm, Ø143mm, D/N (ICR & DSS), AHD & CVBS Outputs, DC12V, IP66	O
	HDUI-N31NPV2C2D	AHD All-In-One, 2MP@30ips, 42IR LED, 2.8~12mm, Ø70mm, D/N (ICR & DSS), AHD & CVBS, DC12V, IP66	O
	HVR-4781	Hybrid 4Ch. AHD, TVI & CVBS, 2MP@100ips, Full HD Monitoring, HDMI & VGA Local Outputs, Audio, Alarm, 1HDD, iSCSI	O
	HVR-8781	Hybrid 8Ch. AHD, TVI & CVBS, 2MP@200ips, Full HD Monitoring, HDMI, VGA & BNC Local Outputs, Audio, Alarm, 2HDD, iSCSI Available with 4HDDs Model	O
	HVR-16781	Hybrid 16Ch. AHD, TVI & CVBS, 2MP@400ips, Full HD Monitoring, HDMI, VGA & BNC Local Outputs, Audio, Alarm, 2HDD, iSCSI Available with 4HDDs Model	O
Analog Systems			
Indoor Dome Cameras			
	GCD600IR	1/3" Color CMOS, 600TVL, 30IR LED, D/N (ICR), 3.6mm, Ø141mm, Built-in Mic., DC12V (CH)	SF
	GCD651-P	1/3" CCD, 650TVL, Digital D/N, DNR, OSD, 3.6mm, Ø123mm, DC12V, Surface & Flush (in Ceiling) Mountable	SF
	GCD701-PV	1/3" Sony super HAD II CCD, 700TVL, D/N (ICR), ATR (D-WDR), DNR, OSD, 2.8~12mm, Ø123mm, DC12V, Surface & Flush (in Ceiling) Mountable	SF
	GCD705-PV	1/3" Sony super HAD II CCD, 700TVL, D/N (ICR), ATR (D-WDR), DNR, OSD, 2.8~12mm, Ø123mm, DC12V/AC24V, Surface & Flush (in Ceiling) Mountable	SF
	HDB344	Wall Mount for above indoor Surface & Flush Mountable models	SF
Vandal Dome Cameras			
	GCD600-VS	Vandal Mini Dome, 1/3" Sony super HAD CCD, 600TVL, DNR, 3.6mm lens, Ø80mm, DC12V, Surface mount, IP67	SF
	GCD700-VS	Vandal Mini Dome, 1/3" Sony super-HAD CCD II, 700TVL, DNR, 3.6mm lens, Ø80mm, DC12V, Surface mount, IP66. (White)	SF
	GCD600-VF	Vandal Mini Dome, 1/3" Sony super HAD CCD, 600TVL, DNR, 3.6mm lens, Ø88mm, DC12V, Flush Mount	SF
	GCD700-VF	Vandal Mini Dome, 1/3" Sony super-HAD CCD II, 700TVL, DNR, 3.6mm lens, Ø88mm, DC12V, Flush mount (White)	SF
	GCD600D-VV	Vandal Dome, 1/3" Sony super HAD CCD, 600TVL, D/N (DSS), D-WDR, 2.8~11mm, Ø145mm, Aluminium, Joystick OSD Menu, Motion Detection, Privacy Masking, Mirror, DC12V, IP67	CLR
	GCD600D-VVH	Vandal Dome, 1/3" Sony super HAD CCD, 600TVL, Heater, D/N (DSS), D-WDR, 2.8~11mm, Ø145mm, Aluminium, AC24V, IP67	CLR
	GCD700D-VVW	Vandal Dome, 1/3" Sony super HAD II CCD, 700TVL, WDR, D/N (ICR & DSS), 2.8~11mm, Ø145mm, Aluminium, Joystick OSD Menu, Motion Detection, Privacy Masking, Mirror, 32x D-Zoom, DC12V, IP67	SF
	DSB-306	Vandal Dome Wall Mount (GCD600x-V & GCD700x-V..Series)	SF
	GCD705-VV	Vandal Dome, 1/3" Sony super HAD II CCD, 700TVL, D/N (ICR), ATR (D-WDR), DNR, OSD, 2.8~12mm, Ø143mm, DC12V/ AC24V, IP66, Surface & Flush (in Ceiling) Mountable	SF
	GCDK01-VVIRW	Vandal Dome, 1/3" 1.3M Sony CMOS, 1000TVL, WDR, D/N (ICR), 24IR LED, 2.8~12mm, Ø144mm, 3D-DNR, DC12V, IP66	S
	HDB243	Wall Mount for GCD705-VV, GCD701-VVIR & GCDK01-VVIRW	S
	GCD705-VWU	Vandal Dome, 1/3" Sony Super HAD II CCD, 700TVL, D/N (ICR & DSS), 2.8~12mm, Ø147mm, WDR, UTP, 3D-DNR, DC12V/ AC24V, IP66, Built-In Video Analytics	SF


















Photo	Model	Description	
Box Cameras			
	GCB601DS	1/3" Sony CCD, 600TVL, Digi D/N, D-WDR, DNR, OSD, Motion Detection, Privacy masking, BLC, AGC, DC12V	SF
	GCB601DI	1/3" Sony CCD, 600TVL, D/N (ICR), D-WDR, DNR, OSD, Motion Detection, Privacy masking, BLC, AGC, DC12V	SF
	GCB705I	1/3" Sony Ex-view HAD II CCD, 700TVL, D/N (ICR), OSD, ATR (D-WDR), DNR, HLC, Motion Detection, Privacy masking, DC12V/AC24V	SF
	GCB709I	1/3" Sony Ex-view HAD II CCD, 700TVL, D/N (ICR), OSD, ATR (D-WDR), DNR, HLC, Motion Detection, Privacy masking, AC230V	SF
	GCBK01W	1/3" 1.3M Sony Exmor CMOS Sensor, 1000TVL, D/N (ICR), OSD, WDR, DNR, HLC, Motion Detection, Privacy masking, DC12V/AC24V	S
Box Camera Accessories			
	GCA0308	Lens, 1/3" 3~8mm Vari Focal DC Auto Iris Lens, IR	S
	GCA2812	Lens, 1/3" 2.8~12mm Vari Focal DC Auto Iris Lens, IR	S
	GCA0550	Lens, 1/3" 5~50mm Vari Focal DC Auto Iris Lens, IR	S
A wider range of lenses is available on special production; Pls ask			
	A101L	IR Illuminator, 210IR LED (Ø5mm), up to 30-50m, DC12V/AC24V	S
	A121L	IR Illuminator, 60IR LED (Ø10mm), up to 80-120m, DC12V/AC24V	S
	HCS811S	Camera Mount, 250mm, Cable through, Deluxe Aluminium	S
	HCH811S-S	Indoor Camera Housing, 250mm Long, 360 with Sunshield, IP65	SF
	HCH921	Indoor Ceiling Housing, High Security Heavy Aluminium, Single tamper-proof screws	SF
	GCA32	Indoor Housing, 410mm Long, with Sunshield, IP65	S
	GCA36-1	Indoor Housing, 360mm, Double Sunshield, IP66, Cable Through (HCS170)	S
	GCA36B	Outdoor Housing, 360mm, Double Sunshield, Blower only, AC24V/20W, IP66	S
	GCA36B-1	Outdoor Housing, 360mm, Double Sunshield, Blower only, AC24V/20W, IP66, Cable Through (HCS170)	S
	GCA36HB	Outdoor Housing, 440mm, Double Sunshield, Blower, Heater, AC24V/20W, IP66	S
	GCA36HB9	Outdoor Housing, 440mm, Single Sunshield, Blower, Heater, AC230V, IP66	S
	HCS161	Housing Wall Mount, Aluminium, unlimited 360° pan, 75° tilt, 9kg	S
	HCS170	Housing Wall Mount, Aluminium Die Cast, 31cm, unlimited 360° pan, 75° tilt, 9kg	S
	HCS173	Housing Ceiling Mount, Aluminium Die Cast, 41cm, unlimited 360° pan, 75° tilt, 9kg	S
All-In-One Cameras			
	GCU600IR	All-In-One, 600TVL, 30IR LED, 3.6mm, Ø55mm, D/N (ICR), Built-in Mic., DC12V, IP66 (CH)	SF
	GCT700VIR	All-In-One Turret, 700TVL, 42IR LED, 2.8~12mm, Ø75mm, Digi D/N, external zoom/ focus control, Built-in Mic., DC12V, IP66 (CH)	SF
	GCU600-VIRW	All-In-One, 600TVL, 36IR LED, 2.8~11mm, Ø91mm, OSD, D-WDR, Motion Detection, Privacy Masking, DC12V, IP66	SF
	GCUK01-VIRW	All-In-One, 1000TVL, 42IR LED, 2.8~12mm, Ø70mm, D/N (ICR), OSD, WDR, Motion Detection, Privacy Masking, DC12V, IP66	S
	GCU545-VIRW	All-In-One, 560TVL, 72IR LED, 6~50mm, Ø88mm, OSD, D-WDR, 3D-DNR, 32x D-Zoom (Pan/Tilt), Motion Detection, Privacy Masking, Mirror, DC12V, IP66	SF
	GCU701-VIRW	All-In-One, 700TVL, 45IR LED, 5-50mm, Ø85mm, OSD, ATR (D-WDR), DNR, external zoom/ focus control, DC12V, IP67	SF





















Photo	Model	Description	
PTZ Dome Cameras			
	GSD22P	22x Optical, 580TVL, Indoor Mini PTZ Dome, D/N (ICR), ATR (D-WDR), DNR, 0~360° panning, 0~180° tilt, indoor surface & flush (in ceiling) mountable	SF
	GSD22V	22x Optical, 580TVL, WDR, Mini PTZ Vandal Dome, D/N (ICR & DSS), Motion Detection, 3D-DNR, Privacy Masking, 0~360° panning, 0~180° tilt, indoor, All-In-One, IP66	SF
	GSD36VW	36x Optical, All-In-One, 700TVL, D/N (ICR & DSS), WDR, DNR, Privacy Masking, Including Vandal Outdoor Housing/ Heater/ Blower & pre-cabled through plus Wall Mounting Brackets included	SF
	CMA-100	Corner Mounting Adapter for GSD36VW	SF
	PMA-100	Pole Mounting Adapter for GSD36VW	SF
	ISB-100	Installation Box for GSD36VW	SF
	CPA-301	Ceiling Plate Pipe Adapter 300mm for GSD36VW	SF
	GSD33F	33x Optical, 550TVL, D/N (ICR & DSS), WDR, DNR, Flush Mounting	CLR
	GSD36AE	36x Optical, 650TVL, WDR, D/N (ICR & DSS), DIS, 3D-DNR, Privacy Masking, 0~360° panning, -10° ~ 190° tilt, One cable for Video & control. Built-In Video Analytics: Motion Detection, Motion Tracking, Tripwire, Entrance Counting, Absent Detection, Tampering, De-focus, De-haze & Scene Change Detection	SF
	GSD36IR	36x Optical, 700TVL, D/N (ICR & DSS), WDR, Synchronized IR LED & Fixed IR LED (150m), DNR, Motion Detection, Privacy Masking, DIS, Alarm, 0~360° panning, 0~180° tilt (Auto Flip), IP66, DC12V	S
	GSD36T-IRW	Rugged PTZ, Vandal Dual Camera System with 36x PTZ 700TVL Camera + Fixed Wide Angle 600TVL Camera with 30IR LED (200m), PIP, WDR, DNR, Privacy Masking, IP66, Fan, Heater & Wiper	O
	WB-400	Wall Bracket for GSD36T-IRW Series	O
	GSK01	Keyboard Controller, 3-axis Joystick, Up to 3 slave Kbd, Jog shuttle, PTZ & DVR control	S
	HID2404CLP	Keyboard Controller LCD text no Image, 1x Slave Keyboard, PTZ & DVR control	S
	HDH304-OC	Outdoor Housing with Blower & Heater for GSD36AE, IP66	S
	HVPWB2	Dome Wall Mount (GSD22V & all same design Domes)	S
	HVPCB2	Dome Ceiling Mount (GSD22V & all same design Domes)	S
	HDB242	Wall mount bracket for All-In-One (GSD22VOE, GSD36VE & HDH304-OC)	S
	HDB241	Ceiling mount bracket for All-In-One (GSD22VOE, GSD36VE & HDH304-OC)	S
	HPB230	All In One Connection Box, AC230V to AC24V transformer, Alarms, RS485, Video in/ out, with wall mount, IP66.	S
	HCS251	Indoor Ceiling, Flush Mount	S
	HCM200	Roof & Parapet Mount	S
	HCM150	Corner Mount	S
	HCM151	Pole Mount	S
Network DVR's Embedded RTOS			
Pls specify total HDD requirements per order			
All DVRs Include IP/Network Management Software license for: iRAS, RAS Mobile, iRAS Mobile & WebGuard			
New version with higher recording resolution @ 960H (960 x 576) wider than 720H (D1) (720 x 576)			
	GDL041A	4Ch, 100/67ips@D1 (720H/ 960H), 1TB, 4-Audio in, Full HD Monitoring (HDMI), 1HDD, H.264, Alarms, USB, IR Remote	S
	GDL082A	8Ch, 200/133ips@D1 (720H/ 960H), 1TB, 4-Audio in, Full HD Monitoring (HDMI), 1HDD, H.264, Alarms, USB, IR Remote	S
	GDL164A	16Ch, 400/267ips@D1 (720H/ 960H), 2TB, 4-Audio in, Full HD Monitoring (HDMI), 2HDD, H.264, Alarms, USB, IR Remote	S
	GDS041A	4Ch, 100/67ips@D1 (720H/ 960H), 1TB, 4-Audio in, Full HD Monitoring (HDMI), 3HDD, H.264, DVD-RW, USB, IR Remote, eSATA	S
	GDS082A	8Ch, 200/133ips@D1 (720H/ 960H), 1TB, 4-Audio in, Full HD Monitoring (HDMI), 3HDD, H.264, DVD-RW, USB, IR Remote, eSATA	S
	GDS164A	16Ch, 400/267ips@D1 (720H/ 960H), 2TB, 4-Audio in, Full HD Monitoring (HDMI), 3HDD, H.264, DVD-RW, USB, IR Remote, eSATA	S
	GDX082L	Hybrid 8Ch Analog + 4Ch IP, 200/133ips@D1 (720H/ 960H), 2MP@70ips for IP, 1TB, 4-Audio in, Full HD Monitoring, Mirroring, Archiving, 3HDD, 3 Monitors, DVD-RW, eSATA	SF


















Photo	Model	Description	
	GDH164A	Hybrid 16Ch Analog + 16Ch IP, 400ips@D1, 2MP@70ips for IP, 2TB, 16-Audio in, Full HD Monitoring, Mirroring, Archiving, 5HDD, 5 Monitors, DVD-RW, Alarms, eSATA, iSCSI	S
	GIN328H	Hybrid 16Ch Analog + Up to 32Ch IP, 400ips@D1, 2MP@960ips for IP, 2TB, 16-Audio in, Full HD Monitoring, Mirroring, 6HDD, 2 Monitors, Alarms, eSATA	O
	GDU08-19	8Ch DVR/ 19" LCD Combo, 200ips, D1, H.264, 320GB HDD (Upgradable), Networkable IRMS Software (No RASPlus)	CLR
ATM/ POS Solutions			
	GDS04A1	4Ch, 100/67ips@D1 (720H/ 960H), 1TB, 4-Audio in, Full HD Monitoring (HDMI), 2HDD, H.264, USB, for POS/ ATM applications	O
	TV045M	TVI ATM Pin Hole, 2MP@30ips, 3.7mm, TVI & CVBS Outputs, DC12V	S
Vehicle (CIT, Transportation....) Solutions			
<p>G4S Hybrid Vehicle Solution for various applications including public transportation, school busses, law enforcement, private fleet, logistics management, railway, metro, taxi and many more.</p>			O
Full Range of Hybrid MDVR & Cameras; Pls ask			
	GDM08	8Ch, 200ips@2CIF, D1, 1TB, Removable HDD, H.264, Vibration Resistant	SF
	GCU420B-IR	Vehicle All-In-One, 420TVL, 10IR LED, 2.5mm (CH)	S
	GCU520B-IR	Vehicle All-In-One, 520TVL, 10IR LED, 3.6mm (CH)	S
	GCU560B-IRW	Vehicle All-In-One, 540TVL, 10IR LED, 3.6mm, D-WDR (CH)	S
	GCU700B-IR	Vehicle All-In-One, 700TVL, 42IR LED, 2.1mm, Wide Angle 120°, IP66 (CH)	SF
	GCD700-VS	Vandal Mini Dome, 1/3" CCD, 700TVL, DNR, 3.6mm lens, Ø80mm, DC12V, Surface mount, IP67. (White)	SF
	GSD36T-IRW	Rugged PTZ, Vandal Dual Camera System with 36x PTZ 700TVL Camera + Fixed Wide Angle 600TVL Camera with 30IR LED (200m), PIP, WDR, DNR, Privacy Masking, IP66, Fan, Heater & Wiper	O
	GML07W2	Vehicle 7" Monitor, Resolution 480x234 (CH)	S
	GML07W1	Vehicle 7" Monitor, Resolution 800x480 (CH)	SF
Special Application Cameras			
	Marine Application Range include IP & HD Analog Cameras.		O
	Radiation-proof housing with built-in B/W camera, lens, against impact of radiation action, up to 10 ³ rad/hour, up to 105 rad accumulative dose, IP66		O
	Explosion-proof housing with PTZ Camera & Explosion Proof Housing with P/T Driver are available for special application. Please ask		O
Monitors			
	GML17P-HD1	17" LCD Monitor, 1280 x 1024 resolution, HDMI, 2 BNC (In/Out), VGA, 2 Audio In, 2D Comb Filter.	S
	GML19P-HD1	19" LED Monitor, 1280 x 1024 resolution, HDMI, 2 BNC (In/Out), VGA, 2 Audio In, 2D Comb Filter.	S
	LED236HD	23.6" Wide LED Monitor, 1920 x 1080 resolution, HDMI, DVI, VGA. (CH)	S
	4K Resolution Monitors	28, 40, 55 and 75 Inch 4K LCD & LED Monitors 3840 x 2160 resolution, high contrast Inputs: HDMI, DVI-D, VGA, SDI, Audio.	O








Photo	Model	Description	
	IP NETWORK MONITOR	23, 27 and 32 Inch LED Monitors built-in Android 4.4 OS, Quad Core RK 3188, Cortex A9 and 8GB internal memory Inputs: RJ-45, BNC, S-Video, VGA, DVI, HDMI, Audio	○
	IP OUT MONITOR	21 and 46 Inch LED Monitors. What is seen on the screen can be viewed or recorded remotely via an IP connection. Inputs: RJ-45, HDMI	○
	<u>16:9 Premium Monitors</u>	9, 18, 21, 23, 27, 32 and 42 Inch Premium LED Monitors. Built-in Speakers, PIP / PBP, 3D Comb Filter, Noise Reduction, Auto Power Recovery, Metal Chassis. Inputs: HDMI, BNC, DVI, VGA, Component, S-Video, Audio	○
	<u>Public View Monitors Built-in Camera</u>	19, 23 and 27 Inch LED Monitors. Built-in Camera, Up to 600TVL resolution, WDR, 2.8-12mm Vari Focal Lens. (except 9.7" model) Built-in Motion Sensor, 3D Comb Filter, Noise Reduction, Built in Speakers. Inputs: HDMI, BNC, VGA, Audio. Available with IP HD camera and IP output.	○
	<u>Sunlight Readable Monitors</u>	15, 17, 19, 32 and 42 Inch Sunlight Readable LCD & LED Monitors. Up to 1,600 cd/m Outdoor Brightness, Built-in Speakers, PIP / PBP, Transflective Technology, 3D Comb Filter, Noise Reduction, Metal Chassis. Inputs: HDMI, BNC, DVI, VGA, S-Video, Audio. (RS-232 model dependent).	○
	<u>HD CCTV & Broadcast Monitors</u>	19, 23, 27, 32, 42 and 55 Inch Premium LED Monitors. Up to Full HDTV, PIP /PBP, Built-in Speakers, 3D Comb Filter, Noise Reduction, Auto Power Recovery, LCD Protection Glass, Metal chassis. Inputs: SD/HD/3G SDI, HDMI, BNC, DVI, VGA, S-Video, Audio.	○
Video Wall Multi-Viewer System			
	Combined 4K Video Wall Monitors	46, 48, 55, 70 and 82 Inch Premium LED Monitors. Up to 4K resolution based on 2x2 configuration, Narrow Bezel size, Internal scaler to spread 1 image across up to 15x15 display, Metal chassis. Inputs: RS-232 In/Out, HDMI In/Out, DVI In/Out, VGA, Audio.	○
	4K Video Wall Monitors	49, 55, 65, 75, 86 and 98 Inch Premium LED Monitors. Up to 4K resolution each, Narrow Bezel size, Internal scaler to spread 1 image across up to 15x15 display, Metal chassis. Inputs: RS-232 In/Out, HDMI In/Out, DVI In/Out, VGA, Audio.	○
	<u>Multi-Viewer System</u>	4Ch., 8Ch. and 16Ch. High Definition Multi-Viewer System.	○
Mounting Solutions for All Above Monitor Categories			
<i>* Above Photos are not proportional nor exact dimensions; they are for illustration purposes only; Specifications are subject to change without Notice .</i>			

Photo	Model	Description
Terms & Comments		
		<ol style="list-style-type: none"> Prices are in U\$D Ex-Warehouse, Local Taxes plus shipping from Warehouse are not included. Payment as per G4S agreement. Delay will result in penalty charges & cancellation of the credit terms. Delivery of "Stock" items is within 5 working days from PO or signed PI, subject to availability. Items with "S" will usually be stocked in one or more of our Warehouses. Pls check before ordering. Items with "CLR" are on clearance pricing, last Stock, will not be available once stock is sold out. Items with "SF" are stocked however will be Phased Out, Pls check before ordering. Items with "O" are produced On Order, delivery 60-90Days, Pls check before ordering. Items with "TBA" are To Be Announced SOON, Pls inquire for pricing & availability, if needed for any project. Items that are new, amended or price change are Highlighted for quick study If Applicable, a service charge of \$100 will be applied per shipment below \$1,000 in value. If Applicable, a service charge of \$150 will be applied per Document for legalization. Products will be reserved for Max 1 week, after which they are automatically released to other orders. Above HDD Pricing is based on pre-installed & tested before shipping, price is subject to quantity and local market pricing. Installing incompatible HDD's on G4S DVR's will VOID the warranty immediately. All products are Made in Korea, unless indicated in description: (CH) China / (JP) Japan. Products specs, modifications, updates & availability are detailed in the Flashes, Newsletters & Website, Pls read carefully. Above specs are not official, Pls refer to Datasheets on website for Final & accurate Specs. All G4S CCTV warranty period is 30/36 months from the date of purchase (on invoice) – Excluding Hard Drives, SF & CLR Items. For Details http://ulcfze.com/support/warranty/
		S
		CLR
		SF
		O
		TBA
<p>KNOWLEDGE & EXPERIENCE EXCHANGE</p> <p>Major changes, review at http://ulcfze.com/exchange-program/</p>		
Contact Details:		
Web Site	www.ulcfze.com	
Ordering:	CCTV@ulcfze.com ; Phone: +962-6-581-5845	
Tech. Support:	TECH@ulcfze.com ; Phone: +962-6-581-5845	
Accounts	Accounts@ulcfze.com ; Phone: +962-6-581-5845	
Logistics:	Logistics@ulcfze.com ; Phone: +971-4-880-8113	