



# CLEARVU6 QUICK START GUIDE

## STEP 1: Camera Installation



Follow these instructions for the installation of each camera. The 60ft video/power wire has two connections: one for video out, and one for power.

1. Screw the mounting bracket into the camera's mounting hole, turning it clockwise.

2. Mount the camera in the desired location no more than 60 feet from the TV/Monitor/VCR DVR unless you have purchased additional wiring. You may wall mount or desk mount these cameras.


3. Adjust cameras to the desired viewing angles.

4. Plug the 4 PIN DIN female connection on the camera into the 4 PIN DIN male connection on the 60ft video/power wire.

5. Match the two arrows on top of both connecting cables.

6. Plug the camera's power supply into the power jack located on the 60ft video/power wire.

7. Plug the camera's power adapter into an AC outlet.

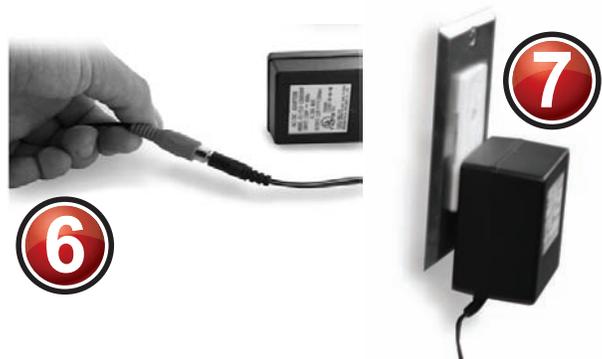

**NOTE:** The CV67 does not support audio.




# CLEARVU6 QUICK START GUIDE

## STEP 2: Monitor Installation

Diagram A

1



1. Hold the adjustment head as shown in Diagram A. Remove the wingnut (part 1) by turning it counter-clockwise. Make sure you hold the adjustment head tightly while moving the wingnut.

Diagram B

2



2. Holding the adjustment head on its side as shown in Diagram B, lift part 2 (including the screw)

Diagram C

3



3. Holding parts 3 and 4 securely as shown in Diagram C, connect part 3 and 4 to the top of the mount stand.

Diagram D

4



4. While continuing to hold parts 3 and 4 securely, insert part 2 (including screw) into parts 3 and 4 as shown in Diagram D.

5



5. While holding the adjustment head as shown, thread the wingnut onto the screw by turning the wingnut clockwise.

6



6. If you need to adjust the mounting plate or adjustment head, loosen the wingnut slightly, adjust, and retighten.

7



7. If necessary, loosen the mounting plate knob by turning counter-clockwise. Slide the mounting plate into the monitor's mounting rail as shown.

8



8. Secure the mounting plate to the monitor by turning the mounting plate knob clockwise.



9. Plug the “3.5mm to RCA (female) wire” into the AV1/IN port on the monitor.



10. Plug the camera's RCA output plug into the video input (yellow) end of the “3.5mm to RCA male wire.”

11. Repeat steps 1 and 2 for connecting a second camera to the AV2/IN port on the monitor.

**NOTE: Please review the manuals for the included camera and monitor which can be found in their respective packages.**