



## **SISTP10xx-141-LR(T)**

**10/100Base-TX to 100Base-FX  
Industrial PoE Switch**

**Installation Manual**

Rev. A

3-Jun-2008



# Table of Contents

---

Trademark, copyright, and product classification information .....	iii
Trademark.....	iii
Copyright restrictions .....	iii
FCC warning .....	iii
CE Mark .....	iii
About this product and manual .....	iv
Industrial PoE Switch .....	iv
Term/usage.....	iv
About this manual .....	iv
Manual structure .....	iv
Cautions and warnings .....	v
Cautions and warnings.....	v
Cautions.....	v
Warnings.....	vi
Section I .....	1
SISTP10xx-141 Industrial PoE Switch .....	1
In this section .....	1
General description.....	2
Overview .....	2
Features.....	2
SISTP10xx-141 Industrial PoE Switch part numbers .....	3
Standard models.....	3
Package contents .....	4
Package contents.....	4
Physical description .....	5
Physical dimensions.....	5
Front panel.....	5
Bottom panel.....	6
Back panel .....	6
Section II .....	7
Installation .....	7
In this section .....	7
DIN rail mounting .....	8
DIN rail clip.....	8
DIN rail mounting considerations .....	8
DIN rail mounting .....	9
Wall mounting.....	10
Wall mount bracket .....	10
Wall mount bracket install .....	10
Grounding the Industrial PoE Switch .....	11
Wiring considerations.....	11
Industrial PoE Switch grounding .....	11
Connecting power to the Industrial PoE Switch .....	12
Redundant power inputs .....	12
Terminal-block wiring .....	13
Connecting an alarm fixture .....	15
Alarm relay.....	15
Alarm relay wiring.....	15
Fault indications .....	16
Connecting fiber cables .....	17
Fiber cable installation .....	17
Connecting copper cables .....	18
Copper cable installation.....	18
Copper cable configuration .....	18
Light Emitting Diodes (LEDs).....	19
LEDs .....	19
Section III: .....	20
Advanced Features .....	20
Introduction .....	20

In this section .....	20
Advanced Features .....	21
AutoCross™ .....	21
Auto-Negotiation ( <i>IEEE 802.3u</i> ) .....	21
Pause ( <i>IEEE 802.3xy</i> ) .....	21
Section IV: .....	22
Cable Specifications .....	22
Introduction .....	22
In this section .....	22
Copper ( <i>RJ-45</i> ) cable specifications .....	23
Copper cabling .....	23
Copper cable specifications .....	23
RJ-45 pinouts .....	23
Fiber cable and optic specifications .....	24
Fiber cable characteristics .....	24
Fiber optic specifications .....	24
Section V: .....	25
Troubleshooting .....	25
Introduction .....	25
In this section .....	25
Troubleshooting problem and corrective action table .....	26
Section VI: .....	27
Contact Us, Warranty, & .....	27
Compliance Information .....	27
Introduction .....	27
In this section .....	27
Contact us .....	28
Technical support .....	28
Live Web chat .....	28
Web-based training .....	28
E-Mail .....	28
Address .....	28
Warranty .....	29
Limited lifetime warranty .....	29
What the warranty does not cover .....	29
Warranty Service .....	29
Who to contact for returns .....	29
How and where to send the returns .....	29
Customer pays non-compliant return costs .....	30
Non-warranty repair costs .....	30
Repaired non-warranty products .....	30
This warranty is your only remedy .....	30
Compliance information .....	31
Compliances .....	31
UL Listed; C-UL Listed ( <i>Canada</i> ) .....	31
FCC Regulations .....	31
Canadian Regulations .....	31
European Regulations .....	31
Appendix A: .....	33
Technical Specifications .....	33
SISTP10xx-141-LR(T) specifications, notices, and warnings .....	33
Notices .....	34
Warnings .....	34

## Trademark, copyright, and product classification information

---

**Trademark** All trademarks and registered trademarks are the property of their respective owners.

---

**Copyright restrictions** © 2008 Transition Networks: All rights reserved. No part of this work may be reproduced or used in any form or by any means—graphic, electronic, or mechanical—without written permission from Transition Networks.  
Printed in the U.S.A.

---

**FCC warning**



This equipment has been tested and found to comply with the limits for class A devices, pursuant to part 15 of FCC rules. These limits are designed to provide reasonable protection against harmful interference in a commercial installation. This equipment generates, uses, and radiates radio frequency energy; therefore, if it is not installed and used in accordance with the instructions in this document, could cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference; the user will be required to correct the interference at the user's own expense.

---

**CE Mark**

**CE** CE Marking (*European Conformity*): This is a Class A product. In a domestic environment, this product could cause radio interference; as a result, the user may be required to take adequate preventative measures.

---

## About this product and manual

---

### Industrial PoE Switch

The SISTP10xx-141-LR(T) unmanaged Industrial PoE Switch provides (4) 10/100Base-TX (*RJ-45*) copper ports with Power over Ethernet injection and a 100Base-FX fiber connection with a fixed optical transceiver. These switches are hardened devices designed to reliably operate in harsh environments such as those found on factory floors, outdoor enclosures or other hazardous environments.

---

### Term/usage

In this manual, the term “Industrial PoE Switch” (*first letter upper case*) refers to the SISTP10xx-141-LR(T) 10/100Base-TX to 100Base-FX Industrial PoE Switch.

---

### About this manual

This manual provides instructions on how to install, configure, and operate the SISTP10xx-141-LR(T) 10/100Base-TX to 100Base-FX Industrial PoE Switch.

---

### Manual structure

This manual has a beginning table of contents; also, at the beginning of each section there is a table of contents. As you traverse the manual, note the side headings. These side headings make it easier to find specific information. The manual sections are as follows:

Section	Description
I	Industrial PoE Switch general description, ordering information, package contents and physical features/description
II	Installation and operation of the Industrial PoE Switch
III	Advanced features
IV	Cable Specifications
V	Troubleshooting
VI	Contacting Transition Networks, product warranty and product compliance information
Appendix A	Presents product specifications, notices, and warnings

---

## Cautions and warnings

---

### Cautions and warnings

Make sure that you read and understand all content identified by these two symbols:



Cautions and warnings appear here and throughout this manual where appropriate. Failure to read and understand the information identified by the “caution” and “warning” symbols could result in poor equipment performance, damage to equipment, or injury to persons.

---

### Cautions

Cautions indicate the possibility of damage to equipment.

 **CAUTION**

Make sure that the Industrial PoE Switch is mounted with proper space around it for ventilation (*heat dissipation*). Failure to observe this caution could result in damage to the Industrial PoE Switch.

 **CAUTION**

Please exercise caution when using power tools. Do not install this unit in damp or wet locations, or in close proximity to very hot surfaces. Failure to observe this caution could result in damage to the Industrial PoE Switch and cables.

 **CAUTION**

Only qualified persons should install the Industrial PoE Switch. Failure to observe this caution could result in poor performance or damage to the Industrial PoE Switch.

 **CAUTION**

Install the Industrial PoE Switch in an environment where the temperature range will not exceed the stated environmental specifications for the particular model being installed. Failure to observe this caution could result in permanent damage to the Industrial PoE Switch.

 **CAUTION**

DO NOT install the Industrial PoE Switch in areas where strong electromagnetic fields (EMF) exist. Failure to observe this caution could result in poor Industrial PoE Switch performance and data corruption.

 **CAUTION**

The Industrial PoE Switch must be mounted to a well-grounded surface. Failure to observe this caution could result in EMI problems.

 **CAUTION**

When connecting DC power wires to the terminal-block plug, pay close attention to the polarity markings shown near the terminal block of the Industrial PoE Switch. Failure to observe this caution could result in damage to the equipment.

 **CAUTION**

This is a Class A product. In a residential environment, this product could cause radio interference in which case the user may be required to take adequate corrective measures.

---

*Continued on next page*

## ***Cautions and warnings, continued***

---

### **Warnings**

Warnings indicate the possibility of injury to persons.



#### **WARNING**

Be sure to disconnect power before installing and wiring the Industrial PoE Switch. Failure to observe this warning could result in an electrical shock.



#### **WARNING**

Fiber optics: Visible and invisible laser radiation when open: DO NOT stare into the beam, or directly view the beam with optical instruments. Failure to observe this warning could result in an eye injury or blindness.



#### **WARNING**

Use of controls, adjustments or the performance of procedures other than those specified herein may result in hazardous radiation exposure.

---



# Section I

## SISTP10xx-141 Industrial PoE Switch

---

**In this section**

These are the topics:

Topic	See Page
General description	2
SISTP10xx-141 Industrial PoE Switch model numbers	3
Package Contents	4
Physical Description	5

---

## General description

---

### Overview

The SISTP10xx-141 unmanaged Industrial PoE Switch can help eliminate EMI or RFI issues and help to overcome distance limitations with copper-based cabling by providing a fiber interface to transport data from copper-based industrial networking and communication devices over fiber optic cabling. In addition, these PoE switches are industrial hardened Power Sourcing Equipment (PSE) and are fully compatible with Powered Devices (PD) that comply with the IEEE802.3af<sup>TM</sup> Power over Ethernet standard.

Each Industrial PoE Switch can connect to either 10Base-T or 100Base-TX copper ports and provides a 100Base-FX fiber optic connection. In addition, the four RJ-45 ports also provide power to Data Terminal Equipment (DTE) Power Devices (PD) over unshielded twisted pair cabling. Multiple fiber optic connector options are offered as well as two distinct operating temperature ranges:

- Standard: -10°C to +50°C (14°F to +122°F)
- Extended: -40°C to +65°C (-40°F to +149°F)

---

### Features

The SISTP10xx-141 Industrial PoE Switch has the following features:

- Auto-Negotiation
  - AutoCross<sup>TM</sup>
  - IEEE802.3af Power over Ethernet compliant
  - 4-port integrated POE injector with full 15.4 Watts per port on data pairs
  - Under-current detection and over current protection [re-settable fuse]
  - Dual, redundant auto-sensing 48VDC inputs with reverse polarity protection
  - Dry Contact Relay alarm output for failure of primary or redundant power input
  - IEEE 802.3x flow control support
    - ▶ Flow control on full-duplex
    - ▶ Back pressure on half-duplex
  - 1K MAC address table
  - Full wire-speed with 1Gbps backplane switching fabric
  - DIN-Rail mounting bracket (installed)
  - Wall mount brackets included
  - IP30 protection metal enclosure
  - Lifetime Warranty
-

## SISTP10xx-141 Industrial PoE Switch part numbers

**Standard models** The part numbers shown in Tables 1 and 2 perform as described in this manual.

**Table 1: Industrial PoE Switch Part Numbers**

**Standard Operating Temperature (-10°C to +50°C)**

Part Number	Ports 1-4: 10/100Base-TX	Port 5: 100Base-FX
SISTP1011-141-LR	RJ-45 100 m (328ft)	ST, 1300 nm multimode 2 km (1.2miles)
SISTP1013-141-LR	RJ-45 100 m (328ft)	SC, 1300 nm multimode 2 km (1.2 miles)
SISTP1014-141-LR	RJ-45 100 m (328ft)	SC, 1310 nm single mode 20 km (12.4 miles)


**Table 2: Industrial PoE Switch Part Numbers**

**Extended Operating Temperature (-40°C to +65°C)**

Part Number	Ports 1-4: 10/100Base-TX	Port 5: 100Base-FX
SISTP1011-141-LRT	RJ-45 100 m (328ft)	ST, 1300 nm multimode 2 km (1.2miles)
SISTP1013-141-LRT	RJ-45 100 m (328ft)	SC, 1300 nm multimode 2 km (1.2 miles)
SISTP1014-141-LRT	RJ-45 100 m (328ft)	SC, 1310 nm single mode 20 km (12.4 miles)

**Note:** The distances for ports 1 and 2 listed in Tables 1 and 2 are typical maximum distances; the physical characteristics of the network will affect the actual distances.

**Table 3: Optional Accessories (sold separately)**


Part Number	Description
25080	 <p>Industrial DIN Rail Power Supply 120W</p> <ul style="list-style-type: none"> <li>- Universal AC input voltage range (<i>switch selectable</i>) 88 ~ 132VAC/176 ~ 264VAC</li> <li>- 48VDC, 2.5A output</li> <li>- Operating temperature range: -10°C to +60°C</li> <li>- Short circuit/Over load/Over voltage/Over temperature protection</li> <li>- Cooling by free air convection – <i>no fan</i></li> <li>- UL 508(industrial control equipment)approved</li> <li>- LED indicator for power on</li> <li>- 100% full load burn-in test</li> <li>- Dimensions: 65mm W x 125mm H x 100mm D</li> <li>- Lifetime warranty</li> </ul>

## Package contents

---

**Package contents**

<u>Quantity</u>	<u>Description</u>
1	10/100Base-TX to 100Base-FX Industrial PoE Switch
1	DIN-Rail mounting bracket (installed)
2	Wall mount brackets
8	Screws (for attaching wall-mount bracket)
1	Installation manual CD

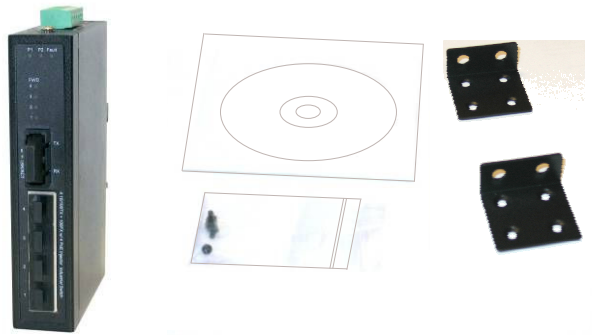

Compare the package contents of your industrial PoE Switch with the standard checklist above. If any item is damaged or missing, please contact Transition Networks Technical Support.

## Physical description

### Physical dimensions

**Width:** 1.2" [30mm]  
**Height:** 5.5" [140mm]  
**Depth:** 3.7" [95mm]

### Front panel

The front panel of the Industrial PoE Switch is shown in Figure 1 with corresponding descriptions listed below:

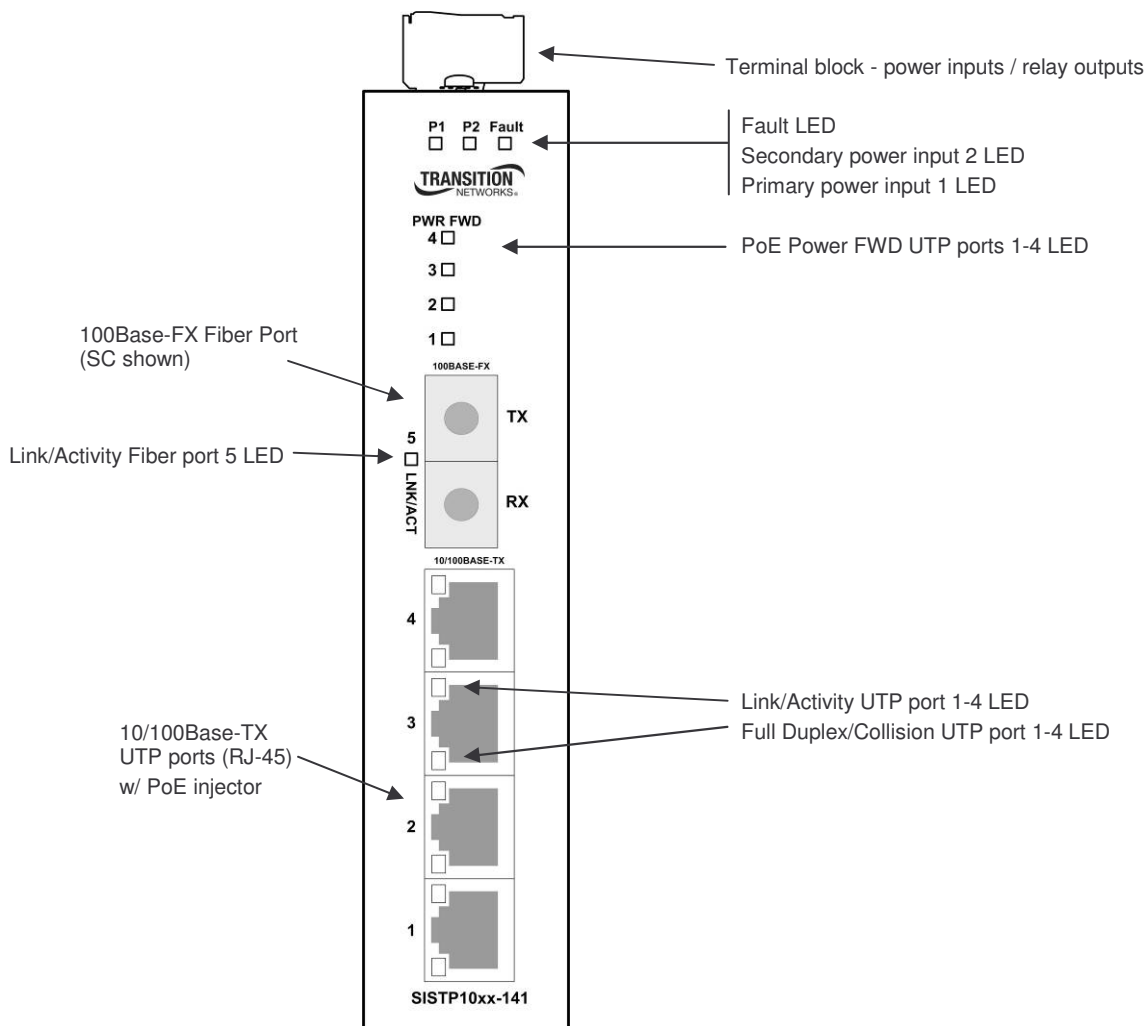



Figure 1: SISTP10xx-141-LR(T) Industrial PoE Switch (Front View)

Continued on next page

**Physical description, continued**

**Bottom panel**


The top view of the Industrial PoE Switch is shown in Figure 2 with corresponding descriptions listed below:

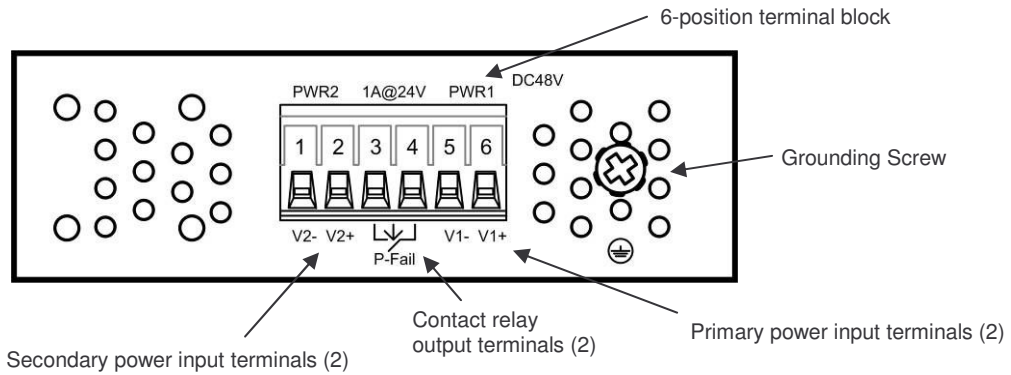

**Figure 2: SISTP10xx-141-LR(T) Industrial PoE Switch (Top View)**

**Back panel**

The back view of the Industrial PoE Switch is shown in Figure 3 with corresponding descriptions listed below:

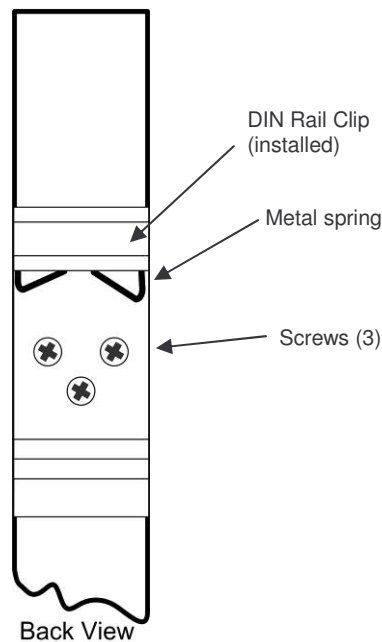

**Figure 3: SISTP10xx-141-LR(T) Industrial PoE Switch (Back View)**

# Section II

## Installation

---

**In this section**

These are the topics:


Topic	See Page
DIN rail mounting	8
Wall mounting	10
Grounding the Industrial PoE Switch	11
Connecting power to the Industrial PoE Switch	12
Connecting an alarm fixture	15
Connecting fiber cable	17
Connecting copper cable	18
Light Emitting Diodes (LEDs)	19

---

## DIN rail mounting

### DIN rail clip

The Industrial PoE Switch includes an aluminum DIN Rail Clip attached to the rear panel. Verify the clip is attached and oriented as pictured in Figure 4 below.

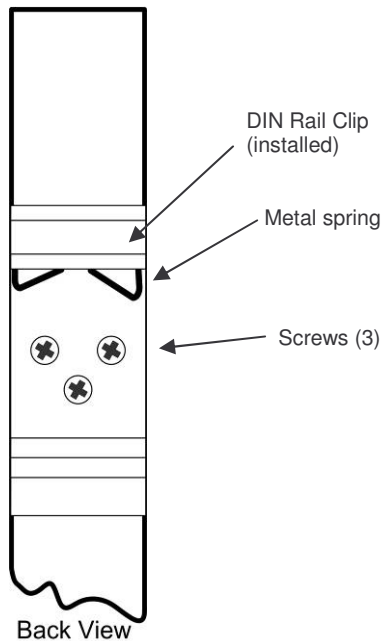

**Figure 4: Mounted DIN Rail Clip**

### DIN rail mounting considerations

Consider the following before mounting the DIN rail to a surface and attaching the Industrial PoE Switch:

- The surface must support at least 450g (1.0 lbs) for the Industrial PoE Switch.
- Do not place heavy objects on the Industrial PoE Switch.

#### **⚠ CAUTION**

Mount the Industrial PoE Switch with proper spacing around it for ventilation (*heat dissipation*). Failure to observe this caution could result in damage to the Industrial PoE Switch.

#### **⚠ CAUTION**

Please exercise caution when using power tools. Do not install this unit in damp or wet locations, or in close proximity to very hot surfaces. Failure to observe this caution could result in damage to the Industrial PoE Switch and cables.


*Continued on next page*



***DIN rail mounting, continued***

**DIN rail mounting** To mount the Industrial PoE Switch to the DIN rail, see Figure 5 and do the following:

Step	Action
1.	Align and then position DIN-Rail-clip spring to the top of the DIN rail as shown in Figure 5, step (a).
2.	Press DOWN on the Industrial PoE Switch and then IN to snap it into place on the DIN Rail. See Figure 5, step (b).

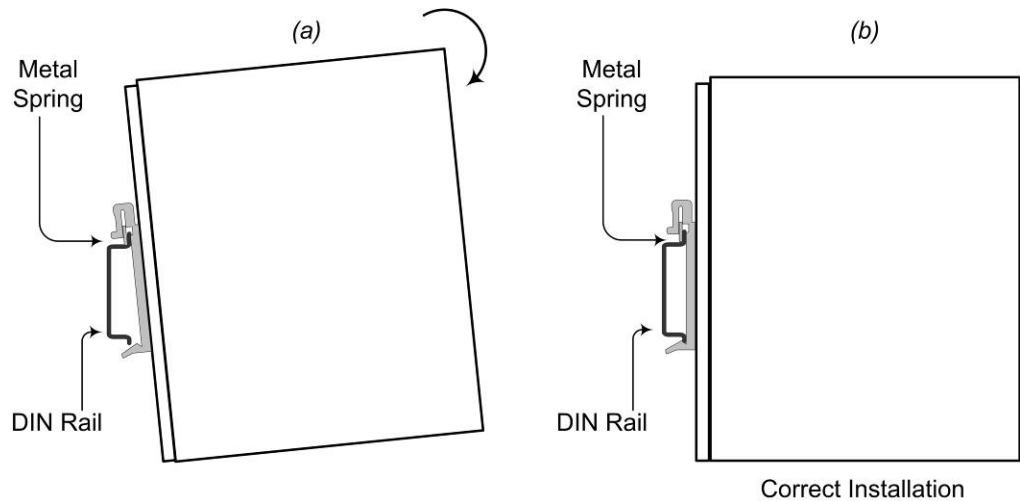

**Figure 5: Industrial PoE Switch Mounting to DIN Rail**

To remove the Industrial PoE Switch from the DIN rail, reverse the steps above.

## Wall mounting

### Wall mount bracket

The Industrial PoE Switch includes wall mount brackets and screws in the contents of the shipping package. The wall mount brackets can be attached to the top and bottom panels of the Industrial PoE Switch to enable mounting to a vertical surface such as the wall of an enclosure. Locate the brackets (2) and screws (8) and follow the steps below to install the brackets on the Industrial PoE Switch.

### Wall mount bracket install

To install the wall mount brackets to the Industrial PoE Switch, see Figure 6 and do the following:

Step	Action
1.	Remove existing screws (3) and DIN-Rail bracket from rear of Industrial PoE Switch.
2.	Locate wall mount brackets (2) and screws (8) from Industrial PoE Switch packaging.
3.	Place brackets in correct orientation as shown and insert and tighten screws to secure bracket to the top and bottom of Industrial PoE Switch.
4.	Mount assembled device to a wall per locally accepted practices for anchoring and securing. (Wall mount screws not included.)

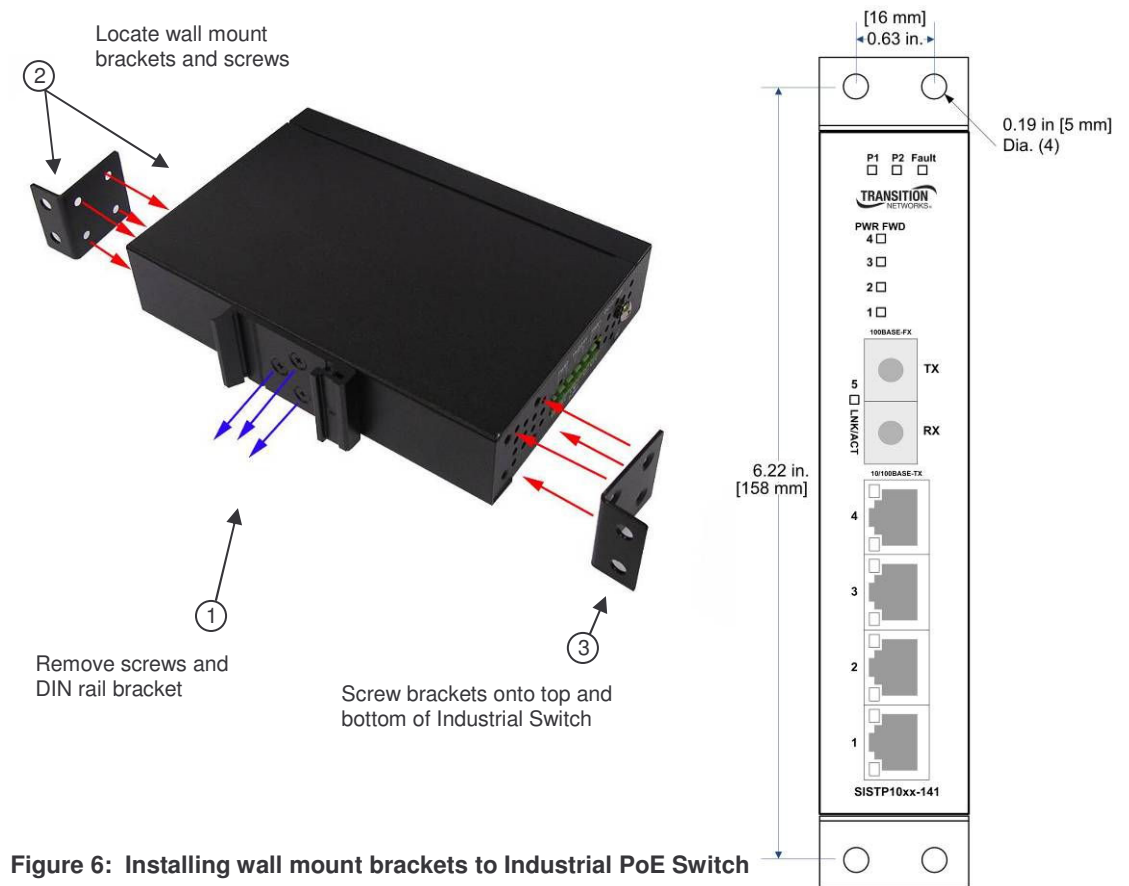


Figure 6: Installing wall mount brackets to Industrial PoE Switch

## Grounding the Industrial PoE Switch

### ⚠ CAUTION

Be sure to disconnect the Industrial PoE Switch from the DC power source before installing and wiring the device.

### Wiring considerations

The following wiring considerations are recommended:

- Signal lines must not be directly connected to outdoor wiring.
- Use separate paths or conduits to route wiring for power and device data cables. To avoid interference, wires with different signal characteristics route separately. If power wiring and device data cables must cross make sure that the wires are perpendicular at the intersection point.
- Use the type of signal transmitted through a wire to determine which wires should be kept separate. The rule of thumb is wiring that shares similar electrical characteristics can be bundled together.
- Keep input and output wiring separated.

### ⚠ CAUTION

The Industrial PoE Switch is intended to be grounded to a well-grounded mounting surface such as a metal plate. Install the grounding wire prior to connecting any other device to the Industrial PoE Switch.

### Industrial PoE Switch grounding

Grounding the Industrial PoE Switch helps limit the effects of noise due to electromagnetic interference (EMI) via proper grounding. Always run the ground connection from the ground screw to a grounding surface before connecting the Industrial PoE Switch to a DC power source. See Figure 7.

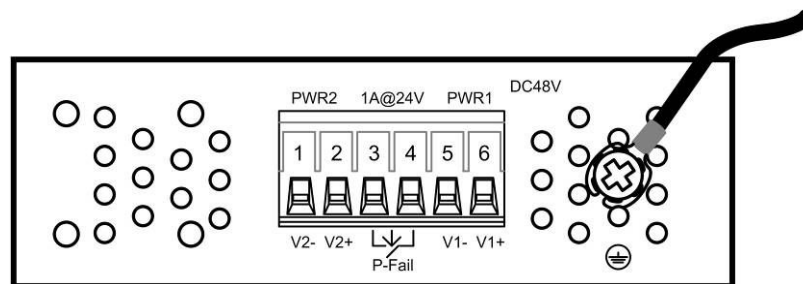



Figure 7: Industrial PoE Switch Ground Screw (Top Panel)

## Connecting power to the Industrial PoE Switch

### Redundant power inputs

The Industrial PoE Switch has dual (*redundant*) power inputs capable of auto-sensing the input voltage, while providing over current protection and reverse polarity protection.

The dual power inputs can be connected simultaneously to live DC power sources. See Figure 8. If one power source fails, the other live source acts as a backup, and automatically supplies the Industrial PoE Switch with power.

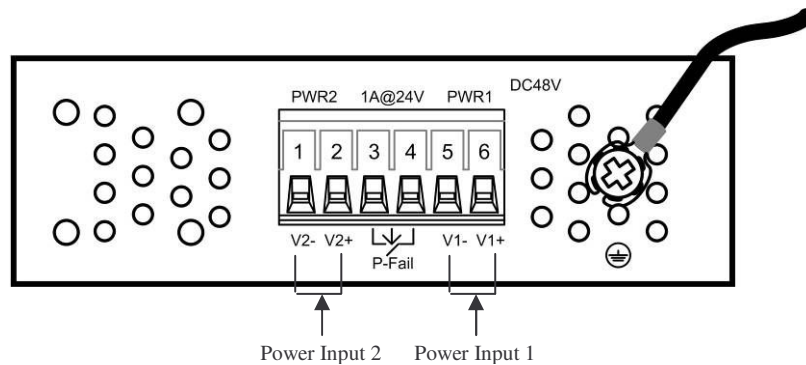

**Figure 8: Redundant Power Connections**

### IMPORTANT

- Power is supplied through an external 48 VDC power source. Check the Technical Specification section for details about the DC power input voltage.
- The Industrial PoE Switch does not include a power switch; therefore, plugging a wired and active terminal-block plug into its terminal block will immediately power ON the unit.

### ⚠ CAUTION

Before connecting the Industrial PoE Switch to a DC power source, ensure the power source is stable.

### ⚠ CAUTION

This device is intended to be supplied by a listed power source marked LPS or Limited Power Source, provided with a connector for field wiring terminal.

### ⚠ CAUTION

This device is designed for operation with a safety extra-low voltage (SELV) in compliance with IEC950 / EN60950 / VDE0805 and in compliance with the low voltage directive 73/23/EEC and 93/68/EEC.

*Continued on next page*

## Connecting power to the Industrial PoE Switch, continued

**Note:** The terminal block can accept 12 – 24 AWG wire for power and alarm relay inputs.


### Terminal-block wiring

To wire the 6-position terminal block for redundant power, do the following:

**Note:** The 6-position terminal-block plug is constructed (*keyed*) to mate with the Industrial PoE Switch terminal block. When wiring the plug for power, use the polarity markings next to the terminal block and on top of the plug to ensure proper connection.

Step	Action
1.	Turn the external power source OFF.
2.	Strip the power wires as required.
3.	Insert one stripped power wire into the terminal block plug. Observe polarity. See Figure 9.
4.	Secure the wire using a flathead screwdriver by tightening the contact screw. See Figure 9.
5.	Repeat Steps 3 and 4 until all wires are installed and secured.

### Terminal-Block Plug 3 Views

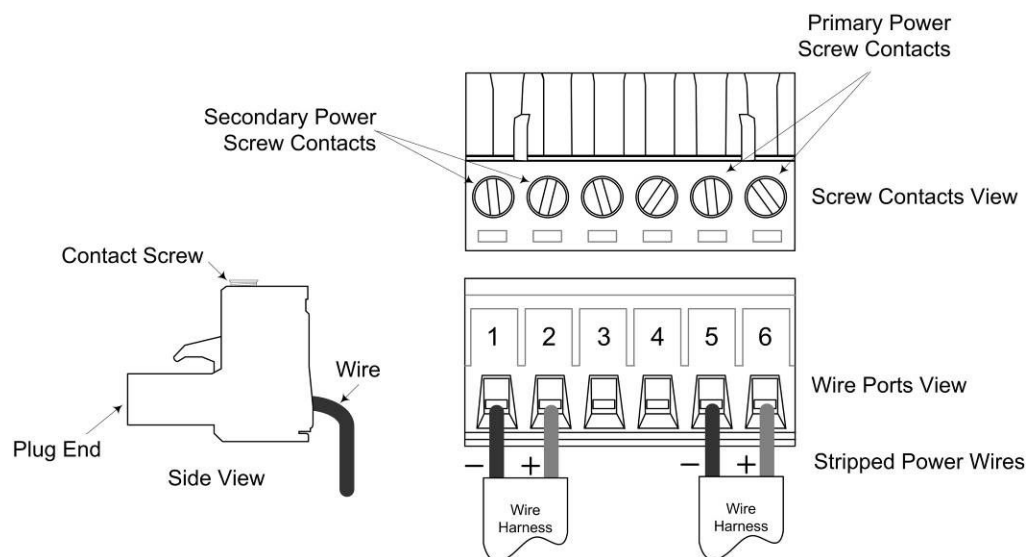


**Figure 9: 6-Position Terminal-Block (Primary/Redundant Power Wiring)**

*Continued on next page*

## Connecting power to the Industrial PoE Switch, continued

### Terminal-block wiring (continued)

Step	Action
6.	Insert the terminal block plug into the Industrial PoE Switch's terminal block, as shown in Figure 10.

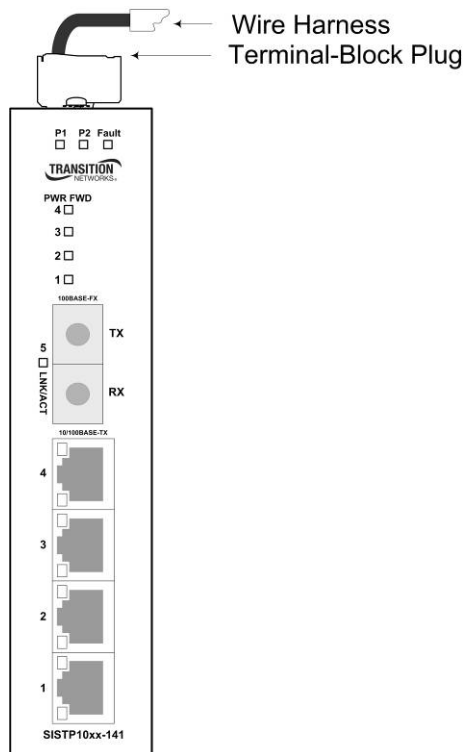

**Figure 10: Wired Terminal Block Plug Inserted Into Industrial PoE Switch**

7.	Make sure that the DC power source is stable and clean.
8.	Turn ON the power source and the PWR LED should turn ON along with PWR 1 LED and/or PWR 2 LED, depending on whether one or both power supplies are connected and turned ON.

**Note:** An external AC/DC power supply is not included with the Industrial PoE Switch. Transition Networks offers an accessory power supply that can be purchased separately, if required. Please see optional accessories in the general information section of this manual for ordering information.

### ⚠ CAUTION

The operating temperature of the Industrial PoE Switch, when used in conjunction with an AC/DC power supply will be limited to the lesser operating temperature range of either device.

**For example:** SISTP10xx-141-LRT (-40°C to +65°C operating temp) used with 25080 (-10°C to +60°C operating temp)


**Operating temp for combination is -10°C to +60°C**

## Connecting an alarm fixture

### Alarm relay

The Industrial PoE Switch has dry relay contacts for connecting an external alarm fixture. Located on the green terminal block on the top panel, the relay has “normally open” contacts that can be wired to form a circuit for triggering an external alarm when a fault occurs (*light or audible alarm*). See Figure 11.

**Note:** Normally open contacts are contacts that form an open circuit when there is a loss of power to the device or when a fault occurs. Once power is applied to the Industrial PoE Switch, the contacts will be closed and current will flow through the contacts.

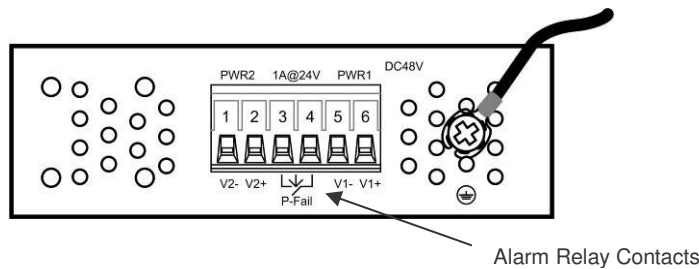


**Figure 11: Alarm Relay Contacts**

### Alarm relay wiring

To wire an alarm to the relay contacts, do the following:

Step	Action
1.	Verify that the external power source is turned OFF.
2.	Strip the wires as required.
3.	Wire the alarm relay as shown in Figure 12.

### Terminal-Block Plug 3 Views

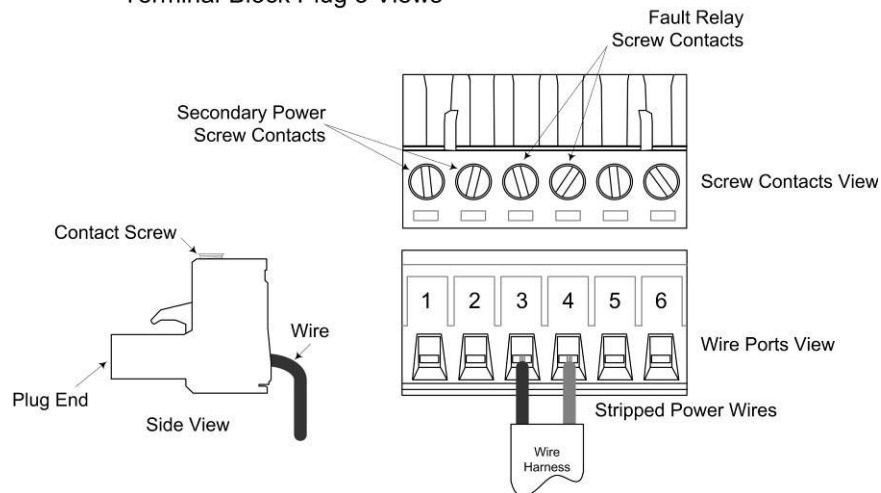

**Figure 12: Alarm Relay Wiring**

*Continued on next page*

## Connecting an alarm fixture, continued


---

**Fault indications** Wire the relay contacts to any warning light or audible alarm in the control room as shown in Figure 13. When a fault occurs, the relay contacts open, stopping the flow of current through the contact circuit. This will disable the external alarm or turn OFF a light, indicating a fault. An alarm will occur under the following conditions:

- Power failure to either of the Industrial PoE Switch power inputs:
  - Power wires are disconnected, power source malfunction
  - Input power is something other than 48VDC

Contacts open under fault condition or loss of power

Light will turn OFF under fault condition

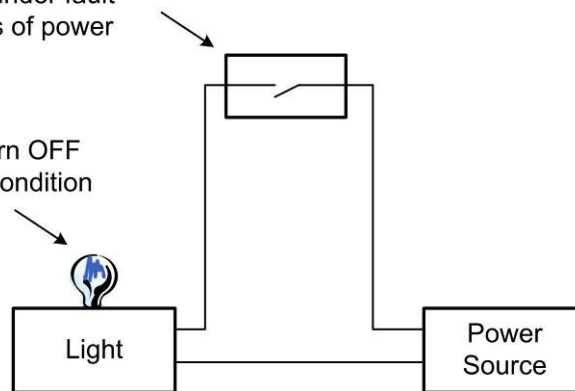

**Figure 13: Alarm Relay Contacts**

---



## Connecting fiber cables

### Fiber cable installation

When connecting fiber cables to the 100BASE-FX port on the Industrial PoE Switch, make sure the correct type is used: ST or SC.

To install the fiber cables, do the following:


Step	Action
1.	Remove and keep the fiber-port protective dust cover(s).

**Note:** When not connected to a fiber cable, keep the protective cover(s) on the optical ports to protect the optics and keep dust and debris from entering the optical interface.

2.	Check that the fiber connectors on the fiber-optic cabling are clean. If necessary, clean the fiber connectors using locally accepted cleaning procedures.
----	--

**Note:** Dirty fiber connectors on fiber optic cables will impair light transmission quality through the cable and lead to degraded performance on the port.

3.	Connect the fiber cable as shown in Figure 14.
----	--

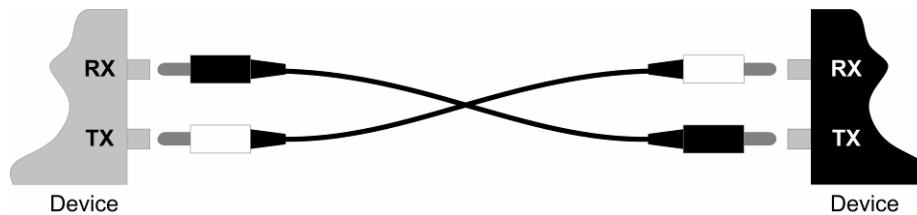

**Figure 14: Fiber Cable Connections**

4.	Check the corresponding fiber port LED on the Industrial PoE Switch to verify the connection—LNK/ACT LED should be lit.
----	---

### Warning

- Visible and invisible laser radiation when open: DO NOT stare into the beam, or directly view the beam with optical instruments. Failure to observe this warning could result in an eye injury.
- Use of controls, adjustments or the performance of procedures other than those specified herein may result in hazardous radiation exposure.

## Connecting copper cables

### Copper cable installation

To connect the copper cable to the Industrial PoE Switch and other equipment, do the following:

Step	Action
1.	Locate or build 10Base-T or 100Base-TX compliant copper cables with male, RJ-45 connectors installed at both ends.
2.	Connect the RJ-45 connector at one end of the cable to the RJ-45 port on the Industrial PoE Switch. See Figure 15 below.
3.	Connect the RJ-45 connector at the other end of the cable to the RJ-45 port on the other device (switch, workstation, PLC, etc.).
4.	Check the copper port LED on the Industrial PoE Switch to verify the connection—LNK/ACT LED should be lit.




Figure 15: Copper Cable Installation

### Copper cable configuration

Either a straight-through or cross-over cable may be used. See Figure 16.

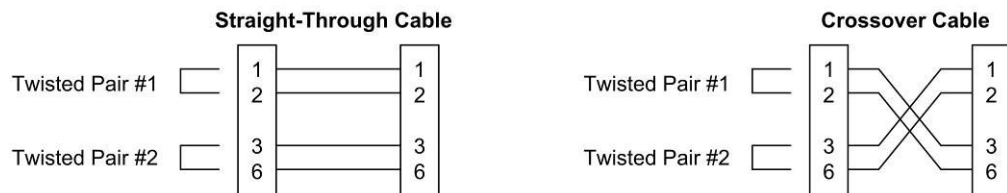



Figure 16: Straight-Through and Crossover Cables

**Note:** The AutoCross™ feature determines the characteristics of the cable connection and automatically configures the unit to link up, regardless of the cable configuration, allowing either straight-through (MDI) or crossover (MDI-X) cables to be used. (Requires no operator intervention.). See Advanced Features section for more information.

## Light Emitting Diodes (LEDs)

### LEDs

The Industrial PoE Switch has LED indicators located on its front panel. The LEDs present at-a-glance network status, and provide real-time connectivity information. Figure 17 shows the LEDs and a chart that explains the function of each.

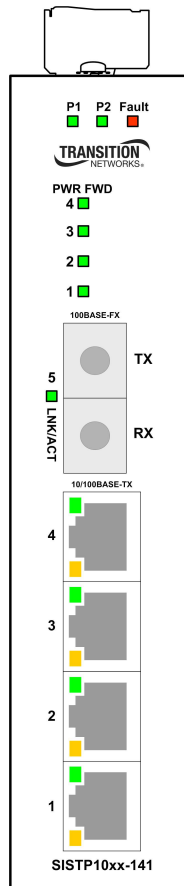

LED	Description
P1	Green = input power present on PWR1 input
P2	Green = input power present on PWR2 input
FAULT	Red = Loss of either power input
LNK/ACT (Fiber port)	Green = fiber link Green (blinking) = fiber port is receiving link pulses or data from a 100Base-FX compliant port
PWR FWD 1-4	Green = PoE power being supplied to powered device (PD) Off = No PoE power being output on port
LNK/ACT (UTP port) [upper LED]	Green = UTP link Green (blinking) = UTP port is receiving link pulses or data from a 10/100Base-TX compliant port
Full Duplex / Collision (UTP port) [lower LED]	Yellow = Full duplex link Yellow (blinking) = collisions occurring Off = half duplex or no link

Figure 17: LEDs and Description Chart

# Section III: Advanced Features

---

**Introduction** This section provides an explanation of the advanced features on the Industrial PoE Switch.

---

**In this section** These are the topics:

Topic	See Page
AutoCross™	21
Auto-Negotiation	21
Pause	21


---

## Advanced Features

### AutoCross™

AutoCross™ automatically detects and configures the twisted pair port on the converter to the correct MDI or MDI-X configuration allowing either straight-through (MDI) or crossover (MDI-X) cables to be used – see figure 18. No user intervention is required.

- \* Eliminates an entire category of troubleshooting
- \* No need to identify cable type; straight-through or crossover
- \* No user intervention required to determine correct button / switch settings

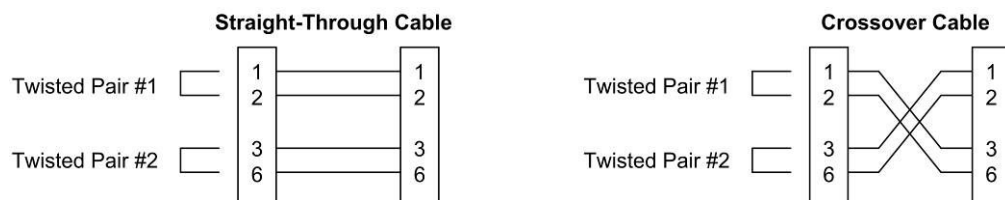

**Figure 18: Straight-Through and Crossover Cables**

### Auto-Negotiation (IEEE 802.3u)

Auto-Negotiation allows devices to perform automatic configuration to achieve the best possible mode of operation over a link. The Industrial PoE Switch will broadcast its speed (10Mbps, 100Mbps) and duplex (half, full) capabilities to other devices and negotiate the best mode of operation between the two devices.

- \* No user intervention required to determine best mode of operation
- \* Optimal link established automatically
- \* Quick and easy installation

**Note:** If the Industrial PoE Switch is connected to a non-negotiating device over the copper link, it will default to 10Mb/s speed, half duplex mode.

### Pause (IEEE 802.3xy)

PAUSE signaling is an IEEE feature that is used to temporarily suspend data transmission between two devices in the event that one of the devices becomes overwhelmed. In the event that a device needs some time to clear network congestion, it will send out a PAUSE signal to the other end device, which will then wait a pre-determined amount of time before re-transmitting the data. Transition's converters will pass PAUSE signaling unhindered; ensuring that the message is delivered to the end device.

- \* PAUSE enabled devices allowed to work properly
- \* Prevents loss of valuable data transmission
- \* Reduces bottlenecks and allows for efficient use of network devices

**Note:** PAUSE signaling is not standardized over fiber media. Transition's Industrial PoE Switches will communicate this signaling over fiber between the switches to pass this signaling on to the other end device.

## Section IV: Cable Specifications

---

**Introduction** This section provides copper and fiber cable specifications.

---


**In this section** These are the topics:

<b>Topic</b>	<b>See Page</b>
UTP cable specifications	23
Fiber cable and optic specifications	24

---

## Copper (*RJ-45*) cable specifications

**Copper cabling** Shielded twisted-pair (STP) or unshielded twisted-pair (UTP) cabling may be used and can be configured as either Straight-through or crossover – see figure 19.

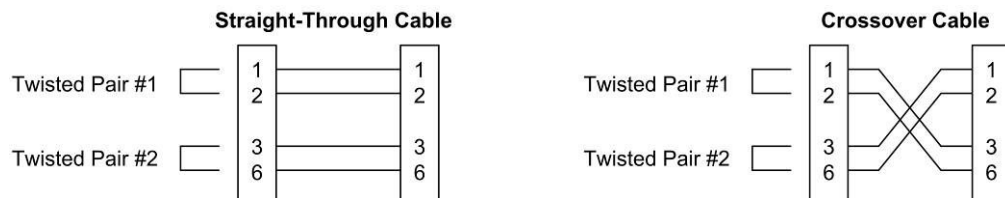

**Figure 19: Straight-Through and Crossover Cables**

**Note:** The AutoCross™ feature determines the characteristics of the cable connection and automatically configures the unit to link up, regardless of the cable configuration, allowing either straight-through (MDI) or crossover (MDI-X) cables to be used. (Requires no operator intervention.). See Advanced Features section for more information.

### Copper cable specifications

Wire category: Category 5 (minimum)  
 Attenuation: 22.0 dB /100m @ 100 MHz  
 Gauge: 24 to 22 AWG  
 Maximum cable distance: 100 meters (328 ft)

### RJ-45 pinouts

Figure 20 shows the RJ-45 connector pin assignment chart for 10Base-T or 100Base-TX.

No	MDI Signal Name	MDI-X Signal Name
1	Receive Data + (RD+)	Transmit Data + (TD+)
2	Receive Data - (RD-)	Transmit Data - (TD-)
3	Transmit Data + (TD+)	Receive Data + (RD+)
6	Transmit Data - (TD-)	Receive Data - (RD-)

**Figure 20: RJ-45 Connector Pin Assignment Chart**

**Note:** The Industrial PoE Switch is configured as a MDI-X device.

## Fiber cable and optic specifications

### Fiber cable characteristics

Cable physical characteristics must meet or exceed IEEE 802.3™ specifications.

Parameter	Specification
Bit Error Rate:	<10 <sup>-9</sup>
Single mode fiber:	9 μm
Multimode fiber:	62.5/125 μm
Multimode fiber:	100/140, 85/140, 50/125 μm

### Fiber optic specifications

The following shows the fiber optic specification:

Fiber Cable	Specifications
<b>SISTP1011-141-LR(T)</b>	1300 nm multimode
Fiber-optic transmitter power:	min: -20.0 dBm    max: -14.0 dBm
Fiber-optic receiver sensitivity:	min: -31.0 dBm    max: 0.0 dBm
Link budget:	11.0dB
<b>SISTP1013-141-LR(T)</b>	1300 nm multimode
Fiber-optic transmitter power:	min: -20.0 dBm    max: -14.0 dBm
Fiber-optic receiver sensitivity:	min: -31.0 dBm    max: 0.0 dBm
Link budget:	11.0dB
<b>SISTP1014-141-LR(T)</b>	1310 nm single mode
Fiber-optic transmitter power:	min: -15.0 dBm    max: -8.0 dBm
Fiber-optic receiver sensitivity:	min: -32.0 dBm    max: -5.0 dBm
Link budget:	17.0 dB

**Note:** The fiber optic transmitters on this device meet Class I Laser safety requirements per IEC-825/CDRH standards and comply with 21CFR1040.10 and 21CFR1040.11.



# Section V: Troubleshooting

---

**Introduction**

This section provides basic troubleshooting information for the Industrial PoE Switch via a problem and corrective action table. The problems are stated in the problem column and the action(s) to take for the problem is stated in the corrective action column. If the corrective measures listed do not correct the problem, contact our 24-Hour Technical Support department at 1-800-260-1312, International: 00-1-952-941-7600.

---

**In this section**

These are the topics:

Topic	See Page
Troubleshooting problem and corrective action table	26

---

## Troubleshooting problem and corrective action table

<b>Problem</b>	<b>Potential Cause</b>	<b>Potential Solution</b>
Industrial PoE Switch does not power up	<ul style="list-style-type: none"> <li>Is the wired terminal-block plug fully inserted into the Industrial PoE Switch?</li> </ul>	<ul style="list-style-type: none"> <li>Wire and insert the terminal-block plug into the Industrial PoE Switch's terminal block – See pages 12-14</li> </ul>
	<ul style="list-style-type: none"> <li>Is the power LED lit?</li> </ul>	<ul style="list-style-type: none"> <li>Check that DC power is at the recommended levels.</li> <li>Contact Technical Support. US/Canada: 1-800-260-1312, International: 00-1-952-941-7600</li> </ul>
No link or activity on the UTP port	<ul style="list-style-type: none"> <li>Is the power LED lit?</li> </ul>	<ul style="list-style-type: none"> <li>Check that the power is turned ON.</li> </ul>
	<ul style="list-style-type: none"> <li>Is the UTP cable properly installed at both ends?</li> </ul>	<ul style="list-style-type: none"> <li>Verify that the cable at both ends is properly inserted into the UTP port</li> </ul>
No link or activity on the Fiber port	<ul style="list-style-type: none"> <li>Is the power LED lit?</li> </ul>	<ul style="list-style-type: none"> <li>Check that the power is turned ON.</li> </ul>
	<ul style="list-style-type: none"> <li>Is the Fiber cable properly installed at both ends?</li> </ul>	<ul style="list-style-type: none"> <li>Verify that the cable at both ends is properly inserted into the fiber port</li> </ul>
Alarm contacts not working	<ul style="list-style-type: none"> <li>Is the wired terminal-block plug fully inserted into the Industrial PoE Switch?</li> </ul>	<ul style="list-style-type: none"> <li>Wire alarm contacts and circuit and insert the terminal-block plug into the Industrial PoE Switch's terminal block – See page 15</li> </ul>
	<ul style="list-style-type: none"> <li>Is the alarm circuit wired for normally-open contacts?</li> </ul>	<ul style="list-style-type: none"> <li>Check that alarm circuit is wired correctly – See page 16</li> <li>Contact Technical Support. US/Canada: 1-800-260-1312, International: 00-1-952-941-7600</li> </ul>

# Section VI: Contact Us, Warranty, & Compliance Information

---

## Introduction

This section explains how to contact Transition Networks via Phone, fax, email, and direct mail. It also explains:

- What the warranty covers
  - Who to contact to return product
  - How and where to return the product
  - Industry standards compliance
- 

## In this section

These are the topics:

Topic	See Page
Contact us	28
Warranty	29
Compliance information	31

---

## Contact us

---

**Technical support**

Technical Support is available 24 hours a day.

United States: 1-800-260-1312

International: 00-1-952-941-7600

---

**Live Web chat**

Chat live via the Web with a Transition Networks Technical Support Specialist.

Log onto [www.transition.com](http://www.transition.com) and click the Transition Now link.

---

**Web-based training**

Transition Networks provides 8-10 seminars per month via live web-based training.

Log onto [www.transition.com](http://www.transition.com) and click the Learning Center link.

---

**E-Mail**

Ask a question anytime by sending an e-mail message to our technical support staff at: [techsupport@transition.com](mailto:techsupport@transition.com)

---

**Address**

Transition Networks

10900 Red Circle Drive

Minnetonka, MN 55343, U.S.A.

Telephone: 952-941-7600

Toll free U.S.A & Canada: 800-526-9267

Fax: 952-941-2322

---

## Warranty

---

### Limited lifetime warranty

Effective for products shipped May 1, 1999 and after, every Transition Networks' labeled product will be free from defects in material and workmanship for its lifetime. This warranty covers the original user only and is not transferable.

---

### What the warranty does not cover

This warranty does not cover damage from accident, acts of God, neglect, contamination, misuse or abnormal conditions of operation or handling, including over-voltage failures caused by use outside the product's specified rating, or normal wear and tear of mechanical components. If the user is unsure of the proper means of installing or using the equipment, contact Transition Networks' free technical support services.

---

### Warranty Service

Transition Networks will at its option:

- Repair the defective product to functional specification at no charge
  - Replace the product with an equivalent functional product
  - Refund the purchase price of a defective product
- 

### Who to contact for returns

To return a defective product for warranty coverage, contact Transition Networks' technical support department for a return authorization number (RAN). Transition's technical support department can be reached through any of the following means:

Technical Support is available 24 hours a day:

- Tel: 800-260-1312 x 200 or 952-941-7600 x 200
  - Fax: 952-941-2322
  - Email: techsupport@transition.com
  - Live web chat: Transition Now
  - Voicemail: 800-260-1312 x 579 or 952-941-7600 x 579
  - All messages will be answered within one hour
- 

### How and where to send the returns

Send the defective product postage and insurance prepaid to the following address:

CSI Material Management Center  
 c/o Transition Networks  
 10900 Red Circle Drive  
 Minnetonka, MN 55343 U.S.A.

Attn: RETURNS DEPT: Credit Return Authorization (CRA)# or Return Material Authorization (RMA) # \_\_\_\_\_

Failure to protect the product during shipping may void this warranty. The return authorization number must be written on the outside of the carton to ensure its acceptance. We cannot accept delivery of any equipment sent to us without a CRA or RMA number.

---

*Continued on next page*

**Warranty, continued**

---

**Customer pays non-compliant return costs**

The customer must pay the non-compliant product(s) return transportation cost to Transition Networks for evaluation of said product(s) for repair or replacement. Transition Networks will pay for shipping the repaired or replaced in-warranty product(s) back to the customer (*any and all customs charges, tariffs, or/and taxes are the customer's responsibility*).

---

**Non-warranty repair costs**

Before making any non-warranty repair, Transition Networks requires a \$200 charge, plus actual shipping costs to and from the customer. If the repair is greater than \$200, an estimate is issued to the customer for authorization of repair. If no authorization is obtained, or the product is deemed not repairable, Transition Networks will retain the \$200 service charge and return the product to the customer not repaired.

---

**Repaired non-warranty products**

Non-warranted products repaired by Transition Networks for a fee will carry a 180-day limited warranty. All warranty claims are subject to the restrictions and conventions set forth by this document.

Transition Networks reserves the right to charge for all testing and shipping incurred, if after testing, a return is classified as "No Problem Found."

---

**This warranty is your only remedy**

This warranty is your only remedy. No other warranties, such as fitness for a particular purpose, are expressed or implied. Transition Networks is not liable for any special, indirect, incidental or consequential damages or losses, including loss of data, arising from any cause or theory. Authorized resellers are not authorized to extend any different warranty on Transition Networks' behalf.

---

## Compliance information

---

### Compliances

CISPR22/EN5022 Class A + EN55024; EN60950 Class A; FCC Class A; CE Mark

---

### UL Listed; C-UL Listed (Canada)

The following part numbers are UL Listed: SISTP1011-141-LR, SISTP1011-141-LRT, SISTP1013-141-LR, SISTP1013-141-LRT, SISTP1014-141-LR, SISTP1014-141-LRT.

---

### FCC Regulations

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at the user's own expense.

---

### Canadian Regulations

This digital apparatus does not exceed the Class A limits for radio noise for digital apparatus set out on the radio interference regulations of the Canadian Department of Communications. Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de la Class A prescrites dans le Règlement sur le brouillage radioélectrique édicté par le ministère des Communications du Canada.

---

### European Regulations

#### CAUTION:

This is a Class A product. In a domestic environment, this product could cause radio interference in which case the user may be required to take adequate corrective measures.

Achtung !

Dieses ist ein Gerät der Funkstörgrenzwertklasse A. In Wohnbereichen können bei Betrieb dieses Gerätes Rundfunkstörungen auftreten. In diesem Fall ist der Benutzer für Gegenmaßnahmen verantwortlich.

Attention !


Ceci est un produit de Classe A. Dans un environnement domestique, ce produit risque de créer des interférences radioélectriques, il appartiendra alors à l'utilisateur de prendre les mesures spécifiques appropriées.

---

**European  
Regulations,**  
(continued)



In accordance with European Union Directive 2002/96/EC of the European Parliament and of the Council of 27 January 2003, Transition Networks will accept post usage returns of this product for proper disposal. The contact information for this activity can be found in the 'Contact Us' portion of this document.



**CAUTION: RJ connectors are NOT INTENDED FOR CONNECTION TO THE PUBLIC TELEPHONE NETWORK.** Failure to observe this caution could result in damage to the public telephone network.

Der Anschluss dieses Gerätes an ein öffentliches Telekommunikationsnetz in den EG-Mitgliedstaaten verstösst gegen die jeweiligen einzelstaatlichen Gesetze zur Anwendung der Richtlinie 91/263/EWG zur Angleichung der Rechtsvorschriften der Mitgliedstaaten über Telekommunikationsendeinrichtungen einschliesslich der gegenseitigen Anerkennung ihrer Konformität.

---



# Appendix A: Technical Specifications

## SISTP10xx-141-LR(T) specifications, notices, and warnings

Parameter	Description
Standards	IEEE 802.3™, IEEE 802.3ab, IEEE 802.3u, IEEE 802.3x, IEEE 802.3af
Regulatory Compliance for Emissions	CISPR/EN55022 Class A; FCC Class A; CE Mark;
Safety Compliance	UL 60950; cUL; CE/EN60950-1
EMI Compliance	EN61000-4-2; EN61000-4-3; EN61000-4-4; EN61000-4-5; EN61000-4-6; EN61000-4-8; EN61000-4-11; EN61000-4-12; EN61000-6-2; EN61000-6-4
Environmental Compliance	IEC60068-2-32 (Free fall) IEC60068-2-27 (Shock) IEC60068-2-6 (Vibration)
Ports	(1) fiber port single mode/multi-mode (4) RJ-45 port
Fiber Optic Specifications	1300 nm multimode min: -20.0 dBm max: -14.0 dBm min: -31.0 dBm max: 0.0 dBm 11.0dB  1310 nm single mode min: -15.0 dBm max: -8.0 dBm min: -32.0 dBm max: -5.0 dBm 17.0 dB
Max Distance	Fiber (fixed): up to 20km (12.4 miles) Copper: up to 100 meters (328 ft.)
Max Data Rate	Fiber: 100 Mb/s Copper: 10Mb/s or 100Mb/s
Signals	TxD, RxD, CTS, RTS, DTR, DSR, RI, DCD, GND
MAC address table	1k MAC addresses
Power Consumption	4.6 watts (w/o PoE); 66 watts (w/PoE)
Ingress Protection	IP30
MTBF (MIL-HDBK-217F)	443,154 hours
Input Power	48 VDC, 0.1A-1.4A; dual, redundant auto-sensing inputs with reverse polarity and overload current protection
Dimensions	<b>Width:</b> 1.2" [30 mm] <b>Depth:</b> 3.7" [95 mm] <b>Height:</b> 5.5" [140 mm]
Weight	0.45 kg (1.0 lbs)
Shipping weight	0.59 kg (1.3 lbs)
Standard Operating Temperature (-LR models only)	-10°C to +50°C (32 °F to 140°F)
Extended Operating Temperature (-LRT models only)	-40°C to +65°C (-40 °F to 167°F)
Storage Temperature	-40°C to +85°C (-40 °F to 185°F)
Operating Humidity	5% to 95% (non-condensing)
Warranty	Lifetime

***SISTP10xx-141-LR(T) specifications, notices, and warnings, continued***

---

**Notices**

- The information in this user's guide is subject to change. For the most up-to-date information on the SISTP10xx-141-LR(T) Industrial PoE Switch, please refer to the user's guide on-line at: [www.transition.com](http://www.transition.com).
  - Product is certified by the manufacturer to comply with DHHS Rule 21/CFR, Subchapter J applicable at the date of manufacture.
  - **IMPORTANT** Copper based media ports: e.g., Twisted Pair (TP) Ethernet, USB, RS-232, RS422, RS485, DS1, DS3, Video Coax, etc., are intended to be connected to intra-building (*inside plant*) link segments that are not subject to lightening transients or power faults. Copper based media ports: e.g., Twisted Pair (TP) Ethernet, USB, RS-232, RS-422, RS-485, DS1, DS3, Video Coax, etc., are **NOT** to be connected to inter-building (*outside plant*) link segments that are subject to lightening transients or power faults. Failure to observe this caution could result in damage to equipment.
- 

**Warnings**

**WARNING:** Visible and invisible laser radiation when open: Do not stare into the beam or view the beam directly with optical instruments. Failure to observe this warning could result in an eye injury or blindness.



**WARNING:** Use of controls, adjustments or the performance of procedures other than those specified herein may result in hazardous radiation exposure.

---