
Model : P882 Serial V1.0

Note

For your safe use and enjoyment of the aigo P882 player, please read the following carefully before use.

Warning:

- Do not expose the player to extremely high or low temperatures.
- Do not expose the player to rain or other moist environments.
- Do not put the player close to magnetic objects.
- Do not drop or throw the player.
- Do not place under direct sun light or in very hot places (e.g. the trunk of a car on a hot day. It may damage the player or cause it to malfunction.
- Please use the enclosed power adaptor rather than another model.
- Do not clean the player with water or detergent, but use the enclosed cleaning cloth.

Note

- Please keep the player clean and do not scratch the display.
- Do not use the player in dusty environments.
- Please do not put heavy items on top of the player.
- Please do not operate or use the player while driving.
- Please do not listen to loud music continuously with earphones as your hearing may be damaged.
- While using earphones, be careful to not pull the cord as it may damage the earphones.
- Please do not disassemble the player yourself. Maintenance is limited to personnel authorized by the original manufacturer.

Copyright statement

To respect intellectual property laws, please do not copy, exchange or share recorded content without authorization. Furthermore, please abide related copyright laws when recording music.

Table of Contents


TABLE OF CONTENTS	3
Chapter I: Getting to know the P882	5
1. Overview of the Player	5
2. Charging the Battery	8
3. Connecting to your PC.....	10
4. System requirements	11
CHAPTER II OPERATION	12
2-1. Precautions.....	12
2-2.Film.....	13
2-3.Music	17
2-4.Photo	21
2-5. Voice Recorder	23
2-6.TV Encoder	25
2-7.E-book	28
2-8.Setting	32
2-8-1. Data Management	33
2-8-2.System Status	35
2-8-3.Volume Adjustment	35
2-8-4.LCD Contrast	35
2-8-5.Power Management	36
2-8-6.Key Tone	37
2-8-7.NTSC/PAL	37
2-8-8.Menu Setting	37
2-8-9.Service Center	38
2-8-10.Time Setting.....	38
2-8-11.HDD Recovery	39

2-8-12.System Renewal.....	40
2-8-13.Video Display.....	41
2-8-14.Desktop Setting.....	41
2-8-15.MTV Backdrop.....	42
2-8-16.MTP Storage.....	42
CHAPTER III TROUBLESHOTING	47
CHAPTER IV APPENDIX	53
Technical Specifications.....	53
Supported Files	55
Packing list	56

Chapter I: Getting to know the P882

1. Overview of the Player

Obverse side

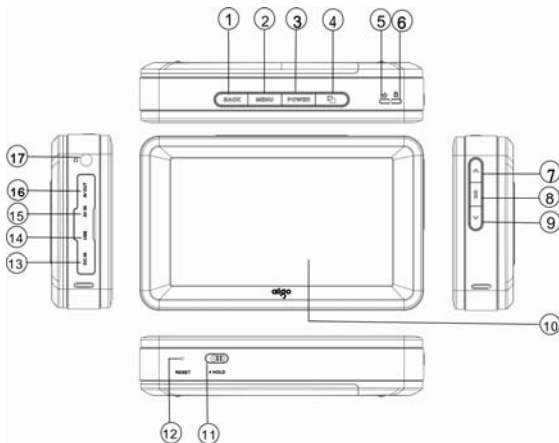

1. Stop/Back Button: When you're playing files, press it once to stop playing. When you're viewing the File List, press it once to go back to the previous File List Page or return to the [Main menu]. When you entered the [Sub menu] or [Effect Menu], press it to close the menu. Allows you to exit the [Sub menu] or [Effect Menu].

2. Menu Button: Press it once to stop playing or return to the [Main Menu].
3. Power Of/Off Button: Press and hold it for 2-3seconds to turn on the MP5 player, click it to power off.
4. Display Mode Swith Button: If you've connected the AV/OUT Cable to the AV/OUT jack, press the button to switch the display to the MP5 player screen content, and the video device will display aigo MP5 P882 pictures including user's interfaces, and multimedia content.
5. Power light: Power on in green light and outer adapter in red light.
6. HD light : Orange light to show HD in use.
7. Select Button (Up): UP button to hightlight item. To selectfile or filoder or to select an item or adjust setting value.
8. OK Button: Press to play. During playback, press to pause/reverse/forward.
9. Select Button (Down): Down button to hightlight item. To selectfile or filoder or to select an item or adjust setting value.
10. LCD screen: Offers a user-friendly interface for multimedia and video.
11. HOLD Button: To inactivate the buttons during playing or carrying. When "HOLD" is in the locked out state, all function buttons are invalkid. To activate them, you only need to put "HOLD" up to unlocked state, slide the switch to the HOLD position. (The "LOCK" icon will appear in the display to remind you that you've locked the player.
12. RESET Jack: In some circumstances, when RESETTING is

needed, please use a pin or pen point to insert to the resetting jack. Press RESET (the memory will be cleared and settings will restart and resume to the defaults).

13. DC 5V: When you plug in the Power Adaptor, the battery inside of the MP5 Player will automatically start to charge.

Note: please do use the exclusive power adapter in the package to recharge!

14. USB 2.0 Port& OTG: Attach the small end (Type Mini-B) of the Mini-USB Cable here. Attach the large end (Type A) to your computer. If it is properly connected, and “USB” icon will be displayed on the screen, then you can move, copy, delete and manage files.

15. AV/IN Jack: Attach the AV out component by AV cable, or attach the audio component by Line in cable.

16. AV/OUT Jack: Attach the AV/OUT cable here when you're connecting the MP5 player to an Audio/Video component, such as a stereo receiver, portable speaker, TV projector, etc.

17. Earphne Jack: For earphone.


Note : The pixel of this device is 480x272 and the same is on TV. aigo P882 play videos in full screen automatically.

Reverse side



1. Battery compartment: Included recharged lithium battery.
2. Bracket: A small shelf or shelves to support the MP5 player.

2. Charging the Battery

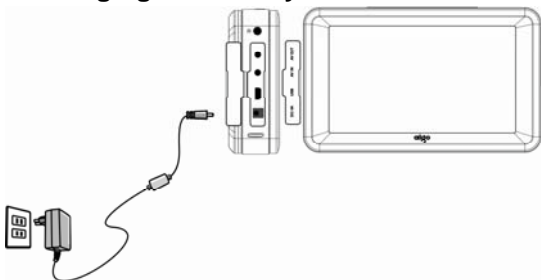


The player uses removable and rechargeable high capacity lithium battery. The battery can be recharged directly through the power adaptor.

1. When the player is out of power, recharge the battery with the power adaptor for about 3 hours. The LED indicator is red while recharging, after the battery is fully recharged the indicator turns out.
2. Please note the specifications of the power supply: output voltage: 5V, output current: 2A.

Note:

1. ***Damage incurred by using other power adaptor that does not come with this device is not covered by our warranty.***
2. ***For the initial use, please fully charge the battery.***
3. ***If the screen of “Low Battery” appears repeatedly, this means the power is insufficient, please recharge the battery; if “The battery is critical low! Please plug in AC adapter.” appears on the screen, the device turns off automatically.***
4. ***When power is insufficient, please turn off the device first and then plug in AC adaptor to recharge the battery.***
5. ***Personal data will be retained even the device is out of power, but please remember to turn off the power before taking out the battery.***


3. Connecting to your PC

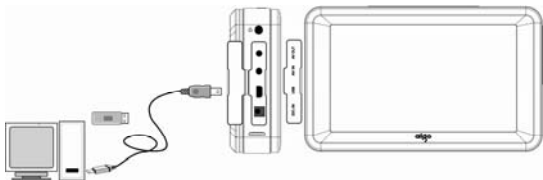

The player can act as a standard USB removable storage disk in Windows. Files can be transferred between the PC and the player.

3.1 Use of the player as Removable Storage Space

1. Start your computer.
2. Turn on the aigo P882 player, insert the smaller end of the USB line into the USB port of the aigo P882 player and insert the other end into the USB port of PC. An icon should appear indicating that aigo P882 is connected.
3. Double click "My Computer", and you will see a new "Removable disk" icon, representing the built-in hard drive of the aigo P882 player.


Note: When using the player for the first time, the system will spend some time on searching for an aigo P882 driver, please wait patiently. In Windows 2000/XP, an icon  will appear in the bottom right in the taskbar, which represents the aigo P882 removable storage.

4. Aigo P882 can be used as removable storage to copy, modify and delete files.

Note: Never remove the USB cord while the computer is reading data, as your data will be lost.

3.2 Disconnecting from your PC

After using your aigo P882, please take the following steps to remove the mass storage device.

Windows 2000/XP: Click the icon  on the bottom right of the screen once and a notice “Safely remove USB Storage Device” will appear then click again, indicating the USB has been removed safely.

4. System requirements

- CPU: Pentium III 500 MHz or above
- OS: Windows 2000 or Windows XP (only Windows XP can be used for DRM-MTP)
- Software requirement: Internet Explorer 4.0 or above
- Hard Disk Space: Greater than 100MB
- RAM: 128MB RAM or more
- Transmission port: USB 2.0/1.1
- CD-ROM driver

Note: There is a built-in speaker in aigo P882.

Chapter II Operation

2-1. Precautions

- Press and hold the the “POWER” button for three seconds to turn the machine on and press one second to turn the machine off.
- According to the resolution of the video file, there will be some difference in the size of the video displayed.
- Since the display panel uses highly luminous CCFL (Cold Cathode Fluorescent Lamp) back-light source, mild heat from the display surface is natural.
- When connecting the player to your computer via the USB 2.0 port, it is suggested you connect the player to a power source via the adaptor.
- As there are precise electronic components inside the player, please do not disassemble.
- If the battery icon indicates low power, charge for at least 3 hours to ensure the battery is fully charged. If multimedia video files are played while charging, more time is needed.

- The aigo P882 couldn't play the files including Error code or beyond the supported files. If insist to play may cause shut down abnormally to restart the unit.
- Aigo P882 is supported by most USB storage, but not supported card reader.

2-2.Film



Allow to put your favorite films into video folder in the hard disk to broadcast the video by the player.

1. In main menu, double tap Film to access this function.

* Tap **Auto Search** the device will automatically search the data, and lists them in alphabetical order.

* Tap to tick a file or or tap filename then tap **Pick** to select the




file.

* Tap **Delete** to delete the selected file or directory.

* Tap **Move to** to move the selected file to specified directory.

2. In file list menu, tap the selected file then tap **Add into PlayList** 10 Playlists appear.

* Tap any number of palylist to add the selected file then tap **Finish** .



* Tap **Cancel** to escape and return to previous screen.

* Or tap **OK** to add the selected file into playlist.



* Tap **OK** to finish adding into playlist then tap **Func** to check playlist or play playlist.



Note: please do not add over 20 files in one palylist.

* To select a file and then tap **Func** to view all the functions.



3. If the subtitles of file appear the wrong code, tap **Encode** to pick the correct coding.



* Tap to return to main menu.

4. In file list menu, double tap the file name to play, the file will play in full screen automatically then tap anywhere on the screen turn to editing screen.



* Tap to play.

* Tap to pause.

* Tap to stop.

* Tap to fast forward; tap to fast rewind, (Provides forward speed 1.5, 2, 4, 8, 16 times; rewind speed 2, 4, 8, 16 times)




* Tap to stop the current file and jump to previous file.


* Tap  to stop the current file

and jump to next file.

* Tap  to switch between normal and full screen.

* Tap  to repeat the current file.



* Tap  to set the current file A-B start bit/stop bit.

Set the A start bit and the icon appear  to set the stop bit. After setting, the section between A-B will be played repeatedly.

* Tap  to cancel the A-B section and play in normal mode.

* Tap  to mute and tap again to play in sound.

* Tap  to return to previous screen.

5. While palying files, tap  to escape and tap  to make a tag and play it next time from the end position.



Note:

While playing films, the software will find subtitles in the same directory. The file name of subtitles must be the same as film and the file extension name must be *.srt.

For example: File name is ABC.avi, and the valid subtitles file name muse be ABC.srt.

2-3.Music



Allow to put your favorite music into music folder in the hard disk to broadcast the music by the player.

1. In main menu, double tap Music to access this function.

* Tap **Auto Search** the device will automatically search the data, and lists them in alphabetical order.

* Tap to tick a file or or tap filename then tap **Pick** to select the file.

* Tap **Delete** , to delete the selected file or directory.

* Tap **Move to** to move the selected file to specified directory.



2. In file list menu, tap the selected file then tap **Add into PlayList** 10

Playlists will appear.

* Tap any number of playlist to add the selected file then tap **Finish** .

* Tap **Cancel** to escape and return to previous screen.

* Or tap **OK** to add the selected file into playlist.

* Tap **OK** to finish adding into playlist then tap **Func** to check playlist or play playlist.


Note: please do not add over 20 files in one palylist.

3. If the lyrics of music appear the wrong code, tap **Encode** to pick the correct coding.



4. To select a file and then tap **Func** to view all the functions.

* Tap to return to main menu.



5. In file list menu, double tap the file name to play.

* Tap to repeat the current file.



* Tap to set the current file A-B start bit/stop bit.

Set the A start bit and the icon appear to set the stop bit. After setting, the section between A-B will be played repeatedly.

* Tap to cancel the A-B section and play in normal mode.

* Tap to select the sound mode (Provides normal, rock, jazz, pop, classical, dance, heavy, disco, soft, 3D Stereo/Live hall etc.)

* Tap to stop

* Tap to pause.


* Tap to jump to play previous/next file.


* Tap to play.

* Tap to play files randomly then tap again to normal mode.

* Tap to mute and tap again to play in sound.



6. While playing music, tap  to close screen to save power then tap anywhere on the screen to normal mode.

* Tap  to play MTV, if lyrics are included, they show on the bottom of the MTV screen.

* Music plays from beginning in MTV mode, the guide of MTV function please refers to P17.



Note:

While playing music, the software will find lyrics in root. The file name of lyrics must be the same as mp3 file and the file extensions name must be lrc.

For example: mp3 file is ABC.mp3, and the effective lyrics file name must be ABC.mp3.lrc, otherwise the software could find the match file. Lyrics file is supported by Winamp plug-in flash lyrics, You may download the flash lyrics in the internet or make it by yourself.

2-4.Photo



Allow to put your favorite photos into digiphoto folder in the hard disk to broadcast the photo by the player.

1. In main menu, double tap Photo to access this function.

* Tap **Auto Search** the device will automatically search the data, and lists them in alphabetical order.

* Tap **Delete** to delete the selected file.

* Tap **List** to show in filename list and filesize, tap **Illustration** to switch showing in minimized photos.


* Tap to tick a file or or tap filename then tap **Pick** to select the file.

* Tap to select a file and then tap **Func** to view all the functions.




* Tap  to return to main menu.



2. Tap  to set slide show period from 1~9 seconds.

* Tap  to confirm.





3. Tap  all photos show in full screen automatically.









4. In file list, double tap any photo to show in full screen and then tap anywhere on the screen to view the editing bar.



* Tap  to view previous/next photo.

* Tap  to enlarge the photo (while photo is bigger than 480 * 272) .

* Tap  to view 1 : 1 ratio.

- * Tap  to zoom in/out photos.
- * Tap  to turn 90 degrees.
- * Tap  to link to music function and tap music files to play.
- * Tap  to view in full screen automatically.
- * Tap  to disable the editing bar.
- * Tap  to return to previous screen.

2-5. Voice Recorder



Providing Line_in recording function to record favorite files into music_recording_ file folder in the hard disk to broadcast the files by the player.

1. In main menu, double tap Voice Recorder to access this function.

* Tap **Auto Search** the device will automatically search the data, and lists them in alphabetical order.

* Tap **Delete** , to delete the selected file.

Voice Record		Auto Search 	
File	Length	Time	
<input type="checkbox"/> 20070907-01.wma	00:00:34	09/07/07 19:04	
<input type="checkbox"/> 20071015-01.wma	00:00:11	10/15/07 15:38	

Pick/Delete/Record/Play/Setting Func

* Tap to tick a file or or tap filename then tap **Pick** to select the file.

Note: Before recording, attach the audio component by line in cable and another side connect the player to an audio out component.

2. Tap **Record** to start recording, please make sure line in cable plugging into the jack.

* Tap **Pause** to pause.

* Tap **Continue** to continue recording.

* Tap **Save** to save files.

* Tap **Cancel** to stop stopping and return to previous screen.



* In file list menu, pick a file and then tap **Play** or double tap files to play files.

Playing time and file length show on the screen.


* Tap **Pause** to pause.

* Tap **Continue** to continue playing.



* Tap **Setting** to set the file format as WAV or WMA.

* Tap to select a file and then tap **Func** to view all the functions.
 * Tap to return to main menu.

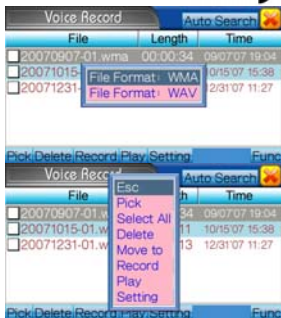

2-6.TV Encoder



Providing AV_in recording function to record favorite TV programs into tv_recording_file folder in the hard disk to broadcast the files by the player.

1. In main menu, double tap TV Encoder to access this function.



* Tap **Start** to view "No signal", please attach the AV_in cable and another side connect to an AV_out component.



2. Recording time show on the screen.

* Tap **Pause** to stop,



* Tap **Continue** to record ,

* Tap **Save** to save recorded file and return to list menu.



3. In recording menu, tap **File** to file list menu,

* Tap **Auto Search** the device will automatically search the data, and lists them in alphabetical order.

* Tap to tick a file or tap filename then tap **Pick** to select the file.



* Tap **Delete** to delete the selected file.

* Tap **Move to** to move the selected file to specified directory.

* Double tap filename to play the file.

* Tap to select a file and then tap **Func** to view all the functions.

* Tap to return to main menu



4. In recording menu, tap **Schedule Recording** to set the recording schedule of date, time, duration, once or weekly.

* Tap **OK** to finish.

* Tap **Cancel** to cancel the schedule.



* Tap to tick a file or or tap filename then tap **Pick** to select the file.


* Tap **New** to add new schedule recording.

* Tap **Modify** to modify the schedule recording.

* Tap **Delete** to delte the selected file.

* Tap to select a file and then tap **Func** to view all the functions.

* Tap  to return to main menu



Schedule Date	Start Time	Record Time
<input type="checkbox"/> 20070907_1120	11:20	01:00
<input type="checkbox"/> 20070...0_2040	20:40	21:00
<input type="checkbox"/> 200710..._2020	20:20	22:00
<input type="checkbox"/> 20080...2_1000	10:00	01:00

Pick New Modify Delete Func

Note: Schedule recording couldn't work while recording.

2-7.E-book



Allow to put your favorite file extension name pdf and txt into ebook folder in the hard disk to read by the player.

1. In main menu, double tap E-book to access this function.

* Tap the device will automatically search the data, and lists them in alphabetical order.


* Tap to tick a file or or tap filename then tap to select the file.

* Tap to delete the selected file.

* Tap to move the selected file to specified directory.

* Tap to select a file and then tap to view all the functions.


* Tap to return to main menu



2. Double tap filename to read the file, scrolling the bar to view up and down.

* Tap to zoom in/out the content.

* Tap to turn pages automatically and tap again to stop.




* When it appears the message "无法辨识, 请切换编码" on the screen, please tap **Encode** to select the correct coding.

* Tap **Add Bookmark** to add the bookmark on the favorite section.





* Tap **Go To Bookmark** to list all of the bookmarks and tap to select the favorite one.




* Tap **Setting** to set seconds of turning pages from 1~10.

* Tap **Music** to jump to music function to play music with reading.

* Tap  to return to previous screen.



3. In file list menu, tap file extension name pdf file.



* It appears the current page and total pages on the bottom of screen.

* Tap **fit width** to select the best reading ratio, provides 10 types of ratio including 400%, 200%, 150%, 125%, 100%, 50%, 25%, 12.5%, fit page(fit the size of screen), fit width (fit the width of screen) .



* Tap **◀ ▶** to turn previous/next page,

* Tap **◀◀ ▶▶** to turn previous/next ten pages.

* Tap **◀◀ ▶▶** to memorize previous action.

* Tap right and bottom scrolling bar to view up and down.

* Tap **Quit** to return to previous screen.

2-8.Setting



Setting Menu 1



Setting Menu 2



Provides functions of Data Management, System Status, Volume Adjustment, LCD Contrast, Power Management, Key Tone, NTSC/PAL, Menu Setting, Service Center, Time Setting, HDD Recovery, System Renewal, Video Display, Desktop Setting, MTV Backdrop, MTP Storage.

2-8-1. Data Management

1. Provides functions of folders, file items, file size, free space, Other memory, format (other memory) and delete, copy, move files.



2. Double tap any file to view in details of file name and size.




* Tap to tick a file or or tap filename then tap **Pick** to select the file.

* Tap **Select All** all files will be marked,

* Tap **Delete** to delete the selected file.

* Tap **Move to** to move the selected file to specified directory.


* Tap  to return to main menu

3. While shifting to other memory, attach the USB OTG to outer storage, and small end attaching USB port, the message "Searching device..." appears on the screen.




4. If the message“external storage found!” appears on the screen, it connects successfully.

5. Tap **Other Memory** to view the files between the main unit and external storage



6. Tap **Free space** to view total capacity, free space, and the percentage of free space.




* Tap  to return to setting menu.

Note:

The function of format is only available on MPT storage.

2-8-2. System Status


To view the status of volume, backlight, key tone, main memory space, font, power-off time and battery.

* Tap  to return to previous screen.




2-8-3. Volume Adjustment


To adjust the volume and balance.


* Tap  to return to previous screen.




2-8-4. LCD Contrast

- To adjust the backlight.
- Tap the center of the circle  for correction by turns of center, right-top, left-top, right-bottom, left-bottom.



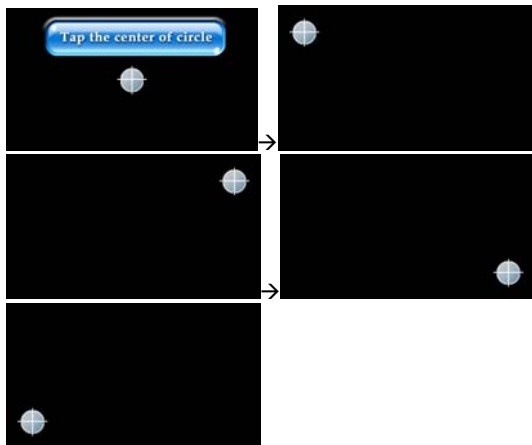


* Tap  to confirm and return to previous screen.

2-8-5.Power Management


To set the auto power-off time and power saving time. If time is up, the screen turns dim to save power.



* Tap  to return to previous screen

2-8-6.Key Tone


To set the key tone off or on, tap “on” on sounds or tap “off” on mute.

* Tap  to confirm and return to previous screen



2-8-7.NTSC/PAL


While attaching TV out cable, select NTSC or PAL mode by different area, the default is PAL mode.

* Tap  to confirm and return to previous screen



2-8-8.Menu Setting

To view the current font, tap 1~3 to switch among Simplify Chinese, Traditional Chinese, or English, the default is simplify Chinese.


* Tap  to return to previous screen



2-8-9. Service Center


Provides the information of A/S telephone number, fax number, website, system version, and machine version.




* Tap  to confirm and return to previous screen ◦

2-8-10. Time Setting



To set the date and time.

* Tap  to set present year and date.

* Tap  to set present time.



* Tap  to return to previous screen.



* Tap  or  to show setting column.

* Tap any digits on the light blue column to tap numeral 1~0 key to set the present time.




- * Tap  to return to previous screen.
- * Tap  to confirm.


Note: If set the unreasonable digits, the message of "invalid time!" appears.


2-8-11.HDD Recovery


1. If data crashes, please read the warning and recover your hdd.

- * Tap  to start recovering.

Note: Please plug in ac adapter while recovering otherwise the icon of OK is not available.




2. Recovering finished, the message "Check Completely" appears and tap  to confirm.




2-8-12.System Renewal

1. Tap “start to update” to update the unit system.




2. Please plug in the adapter, if not the message “please insert adapter first” appears, and tap **OK** to confirm.



3. The process of updating appears on the on left-top side.


4. Updating finished, tap **EXIT** to shut down automatically.



Note : Updating finished, the system updated message appears on the bottom of screen, please press “back” and “power” at the same time to restart the unit.

2-8-13.Video Display

Tap to select the video display mode of zooming or full screen.


* Tap  to return to previous screen.




2-8-14.Desktop Setting

1. Tap to select decided (the default picture) or voluntarily establishes.



* Tap "Voluntarily establishes" and tap  to set,

2.Pick one picture from all and tap **Preview** to view or double tap one picture,



3.Tap **Save as desktop** and return to main menu to confirm.

2-8-15.MTV Backdrop

1. Tap "Decided" to set the films on the folder of "MTV_Video" to be the MTV backdrop.



2. Tap "Voluntarily establishes" to set the films on the folder of "MTV_ background "to be MTV backdrop.

Note: MTV backdrop supported files are wmv, avi, mpeg, dat and mpg.

2-8-16.MTP Storage

Provides function of transferring multi-media files between computer to device aigo P882.

1. Double tap MTP storage · attaching the USB cable to the computer USB port and the other end to the aigo P882 USB port and start to connect with the PC.



2. From now on, all actions operate on the computer. Connect to the program Windows Media Player automatically and tap “OK” to transfer files.

Note :

Please do not plug out the USB cable while connecting preventing from data loss.



3.If use this function first time (all new WMP10) , the message appears, recommend to select first option to search the available files to transfer with aigo P882 and select “Next”





4. After searching, numbers of media files(it differs from every user) have added to media box and select media box and select “Next”.



5. The computer can identify the aigo P882 as the mass storage (the message only appears on the first use) and select finish to confirm.



6. Media files automatically synchronize to aigo P882 storage and select the left side   P882 to check.




7. Since second time use, please select the second option to select desired media files to synchronize.



8. Click right mouse to add the synchronized files or drag the media files to list.



9. Synchronized media files would be listed on the right list, select  to synchronize.



10. The synchronized percentage appears on the screen.

11. After operation, plugging out USB cable directly and aigo P882 returns to setting menu.

Chapter III Troubleshooting

Q: The aigo P882 player is not responding to the Power button, why?

1. Before using for the first time, please check whether the “HOLD” button has been pushed to the right side (unlocked state). The factory default is in a locked state where all functional buttons will not respond. This guarantees safety of the player during transportation. Push “HOLD” to the right side, and press the POWER ON/OFF button to turn on the player.
2. Press and hold “POWER ON/OFF” button for 3 seconds, the player should turn on.

Q: Is it necessary to charge the battery before using the aigo P882?

Yes. The battery must be charged for at least 10 hours before the first use.

Q: What is MPEG-4?

MPEG-4 is a new multi-media format. It has been widely applied in portable multimedia devices and internet file transfer processes, etc. The advanced MPEG-4 compression technology compresses files to a greater

degree by an *object-oriented calculation method* that still guarantees the picture and sound quality of the original video files. This method ensures fidelity even when compressing the file to less than 1/10 of its original size.

Q: How can I convert DVDs to MPEG-4 files?

DVDs are MPEG-1/ MPGE-2 files. Due to their large volume, it is difficult to save them on large-capacity hard disks for portable video display. However, in the current market, many producers have developed convenient and easy-to-use conversion software, ie.MPEG-4 coding software. Put your DVD into the DVD-ROM drive select MPEG-4 file specifications and the software automatically converts the videos into a MPEG-4 file.

We recommend Dr DivX software for users of aigo P882. The software is developed by DivXNetworks company and maintains the quality and compatibility of converted files. (www.divx.com)

Q: Can aigo P882 players play MPEG-2 files?

Yes, they can. However, MPEG-1/MPEG-2 video files are very large. Only 6-8 files can be stored on the aigo 80GB hard drive. Aigo P882 is designed for portable video display and hence uses, they adopt advanced MPEG-4 decoding and coding technologies, allowing 60 to 80 MPEG-4 compressed video files to be stored. Aigo 882 users are recommended to use MPEG-4 files,

in order to take full advantage of the player.

Q: What is the format of sound files recorded by the aigo P882?

aigo P882 players record sound in the WMA(*.WMA) and WAV (*.WAV) format. For details, please refer to Technical specifications of aigo P882.

Q: Why is the sound recording not working?

In order to prevent overly-short audio files or cutting off of the recording because of insufficient hard disk space, audio recording rests when there is less than 200MB of hard drive space.

Q: What is the maximum length for a recorded audio file?

The player can record a high quality sound file of 2 hours.

Q: Are there any restrictions on file size for transfer to the aigo P882?

aigo P882 uses FAT32 file storage, it is recommended that you limit each file to 4GB.

Q: How long does it take to charge the aigo P882?

The battery needs 3 hours to be fully charged. If you are playing multimedia while the player is charging, please charge for a longer period.

Q: How do I reset the aigo P882?

In case of system failure, use the end of a paper clip or a pen press the recessed Reset button found on the bottom of the player. The player should turn off.

Q: In case of low power why might the player behave abnormally?

As you use the player, the battery gradually ages and may cause the battery indicator to lose accuracy. You could try changing the battery or directly contacting our after-sale service staff.

Q: Under a normal situation, why can't I disconnect from the PC? "The universal storage device could not stopped at this time" continually appears.

Please exit any programs that may be accessing the player, including WINDOWS Content Server. If it still doesn't work, please close all programs and try to disconnect the player after 20 seconds. If it still fails, press the POWER button to turn off the player and

disconnect the USB cable.

Q: Why can't I connect the player to an un-powered removable hard drive via USB?

Hard drives require a large amount of electric current. The aigo P882 only comes with a 5V power supply and hence can not be connected to a hard drive.

Q: How can I create E-books?

The player supports TXT text files, so you only need to download the text files to the E-book directory in the player. If you want to view the content of a website in the aigo P882 player, you need to save the website as TXT file.

Q: Why can't I connect the player via USB when the power is low?

The USB connection consumes some energy, detects low power and kicks in its automatic restart function.

Q: The removable disk is connected to the computer but I can't find the movable disk, why?

1. Ensure that the player aigo P882 is on when connecting to the computer. If it is OFF, turn it ON.

The player should enter the USB interface.

2. Make sure that the USB connection is secure. Otherwise, it is possible due to that the USB port has not been enabled in the BIOS settings in the system. Restart your computer and enter the BIOS settings and enable the USB port.
3. Check that the USB cable is functioning properly by attaching it to another device.
4. Check that the USB driver has been installed in Win98. If not, install it.

Q: Do videl files support subtitles?

Yes. Subtitle files (.SRT) and corresponding video files of the same name are stored in the same directory. For example, for a movie titled "XXX.rmvb", the player would first try to find "XXX.srt". If these files can not found, subtitles for this video can not be used.

Chapter IV Appendix

Technical Specifications

<i>Index</i>	<i>Parameters</i>
Dimensions	125mm(L)x77mm(W)x29.9mm(H)
Weight	304g±10% (with battery)
LCD display	4.3 inches TFT LCD, 480X272 pixels
Power supply	Rechargeable lithium cell. <i>unloadable at 2300 mAh</i>
HDD	2.5" HDD, 80GB-160GB
Transmit connector	Mini-USB connector USB2.0 compatible with 1.1, USB OTG
Audio output	Earphone output: 32 Ω left 40mW + right 40mW: (maximum volume)
	Built-in loudspeaker: 8 Ω 0.5 W x2
Video output	Supported video output: PAL, NTSC
	Composite video output
Temperature scope	Operating temperature: 0°C~40°C
	Storage: -20°C~70°C
Language	Simplify Chinese / Traditional Chinese / English
Playing Time	Audio : MP3,128K,about 4 hours (Mpeg1.0 layer3, 44KHz,128kbps, one file repeating, volume 50%, earpone , screen off, other default)

	Video:RM/RMVB, about 2.5 hours,RMVB, 480*272, 587kbps, 24fps, one file repeating, volume 50%, earphone, other default)
OperatingSystem	Computer configuration : Windows2000 / XP (only XP supportsDRM transfer)
	File system: FAT32 file system

Note: The design or format may be changed without notice.

Memory explanation: The HDD of this device is composed by 2GB and 72.5GB. The memory of 2GB is used by system and program and the other 72.5GB is for user. 10GB of 72.5GB is preserved DRM for MTP usage. User can view this space in the MTP of setting and put music or video files in this space.

**72.5+2 = 74.5GB = 76288MB = 78118912KB = 79993765888B
about 80G**

The bios system is saved in HDD so user can't format by himself.

Supported Files

<i>Item</i>	<i>Description</i>		
Audio play	File types	MP3, WAV, WMA, OGG	
	Bit rate	32Kbps~320 Kbps	
Video play	File type	DAT	Video type: MPEG1
			Audio type: MP3, AC3
			Video frame rate: 30 fps
			Resolution rate: 352x288
			Code flow: 1.5Mbps
		AVI	Video type : MPEG4 SP, ASP, DivX4.x, DivX5.x, DivX6.x, Xvid
			Audio type: MP3, AC3
			Video frame rate: 30 fps
			Resolution rate: 720x480
			Code flow: 8Mbps
		RM / RMVB	Video type: RV 30, 40
			Audio type: RA 10, 20
			Video frame rate: 30 fps
			Resolution rate: 720x480
			Code flow: 1.5Mbps
		WMV9	Video type: WMV9
			Audio type: WMA
			Video frame rate: 30 fps
			Resolution rate: 720x480
			Code flow: 7Mbps
MPG2	Video type: MPG2		
	Audio type: MP@ML		
	Video frame rate: 30 fps		
	Resolution rate: 720x480		
	Code flow: 8Mbps		

	Subtitle	*.SRT format
Photos	File types	JPEG, GIF, BMP, PNG, TIF
	Resolution	Max support 8Mpixel (24bit)
Recording	File types	WAV (8KHz, 32Kbps) WMA (16KHz, 64Kbps)
E-book	File types	TXT (Max 2MB) PDF (Max 5MB)

Packing list

Thank you for buying an aigo P882

When you open the package, please check for the following items:

Serial No.	Item Name	Quantity
1	Player	1
2	AV-out cable	1
3	USB cable	1
4	USB-OTG adaptor	1
5	Power adaptor	1
6	Earphones	1
7	LINE IN cable	1
8	Li-ion battery	1
9	User Manual	1